

# SMARTSOURCE®

VERTICAL STACK WATER SOURCE HEAT PUMP



Model WSVF



Model WSVC

- MODELS WSVF & WSVC
- UNIT SIZES 009 – 036
- R-32 REFRIGERANT

|                                              |           |                                                                          |           |
|----------------------------------------------|-----------|--------------------------------------------------------------------------|-----------|
| <b>Safety Information</b> .....              | <b>3</b>  | <b>Field Installed Accessories</b> .....                                 | <b>42</b> |
| Hazard Identification .....                  | 3         | Wireless Temperature Control .....                                       | 42        |
| Safety Considerations .....                  | 3         | Motorized Isolation Valve & Relay .....                                  | 43        |
| UL Compliance Statements for Unit Work ..... | 4         | <b>Typical Wiring Diagrams</b> .....                                     | <b>45</b> |
| Unit Labels .....                            | 4         | <b>Operation</b> .....                                                   | <b>54</b> |
| <b>Introduction</b> .....                    | <b>5</b>  | Start-Up .....                                                           | 54        |
| Model Nomenclature .....                     | 5         | Controls .....                                                           | 55        |
| General Information .....                    | 8         | Configuration DIP Switches .....                                         | 57        |
| Receiving and Handling .....                 | 8         | MicroTech SmartSource Unit Controller .....                              | 58        |
| Storage and Operating Environment .....      | 8         | MT2300 Controller with an Optional BACnet®<br>Communication Module ..... | 61        |
| Prior to Installing .....                    | 10        | <b>Maintenance</b> .....                                                 | <b>62</b> |
| Dimensional Data .....                       | 14        | Troubleshooting .....                                                    | 62        |
| <b>System Applications</b> .....             | <b>29</b> | <b>Refrigerant Information</b> .....                                     | <b>63</b> |
| Water System Quality .....                   | 29        | Refrigerant Guidelines .....                                             | 63        |
| Operating Limits .....                       | 30        | Typical Refrigeration Cycles .....                                       | 66        |
| <b>Installation</b> .....                    | <b>32</b> | <b>Appendix</b> .....                                                    | <b>68</b> |
| Risers and Cabinet .....                     | 32        | Warranty Registration Form .....                                         | 68        |
| Power Wiring from Building to Unit .....     | 34        | Warranty Registration Form .....                                         | 69        |
| Drain Hose Connections .....                 | 36        | Warranty Registration Form .....                                         | 70        |
| Water Connections .....                      | 37        | Limited Product Warranty .....                                           | 71        |



©2026 Daikin Applied, Minneapolis, MN. All rights reserved throughout the world. This document contains the most current product information as of this printing. Daikin Applied Americas Inc. has the right to change the information, design, and construction of the product represented within the document without prior notice. For the most up-to-date product information, please go to [www.DaikinApplied.com](http://www.DaikinApplied.com).

™@ SmartSource, MicroTech, and Daikin Applied are trademarks or registered trademarks of Daikin Applied Americas Inc. The following are trademarks or registered trademarks of their respective companies: BACnet from American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc.; Echelon, LonWorks, LonMark, and LonTalk from Echelon Corporation; Modbus from Schneider Electric; and Windows from Microsoft Corporation.

# Safety Information

## Hazard Identification

### DANGER

Danger indicates a hazardous situation, which will result in death or serious injury if not avoided.

### WARNING

Warning indicates a potentially hazardous situation, which can result in property damage, personal injury, or death if not avoided.

### CAUTION

Caution indicates a potentially hazardous situation, which can result in minor injury or equipment damage if not avoided.

### NOTICE

Notice indicates practices not related to physical injury.

## Safety Considerations

This manual provides installation and maintenance information for Daikin Applied SmartSource Vertical Stack Water Source Heat Pump with a MicroTech® controller.

A means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules for stationary appliances not fitted with means for disconnection from the supply mains having a contact separation in all poles that provide full disconnection under overvoltage category III.

### DANGER

**LOCKOUT/TAGOUT** all power sources prior to service, pressurizing, de-pressurizing, or powering down the unit. Failure to follow this warning exactly can result in serious injury or death. Disconnect electrical power before servicing the equipment. More than one disconnect may be required to de-energize the unit. Be sure to read and understand the installation, operation, and service instructions within this manual.

### WARNING

Electric shock hazard. Improper handling of this equipment can cause personal injury or equipment damage. This equipment must be properly grounded. Connections to and service of the MicroTech control panel must be performed only by personnel that are knowledgeable in the operation of the equipment being controlled.

### WARNING

Polyolester Oil, commonly known as POE oil is a synthetic oil used in many refrigeration systems, and may be present in this Daikin Applied product. POE oil, if ever in contact with PVC/CPVC, will coat the inside wall of PVC/CPVC pipe causing environmental stress fractures. Although there is no PVC/CPVC piping in this product, please keep this in mind when selecting piping materials for your application, as system failure and property damage could result. Refer to the pipe manufacturer's recommendations to determine suitable applications of the pipe.

### WARNING



This unit contains R-32, a class A2L refrigerant that is flammable. This unit should only be installed, serviced, repaired, and disposed of by qualified personnel licensed or certified in their jurisdiction to work with R-32 refrigerant. Installation and maintenance must be done in accordance with this manual. Improper handling of this equipment can cause equipment damage or personal injury.

For installation only in locations not accessible to the general public.

Be aware that R-32 refrigerant may not contain an odor. Place in a well ventilated area to prevent accumulation of refrigerant. When installing the unit in a small room, take measures to keep the refrigerant concentration from exceeding allowable safety limits. Excessive refrigerant leaks, in the event of an accident in a closed ambient space, can lead to oxygen deficiency.

Do not pierce or burn this unit.

Never use an open flame during service or repair. Never store in a room with continuously operating ignition sources (for example: open flames, an operating gas appliance, or an operating electric heater), where there is ignitable dust suspension in the air, or where volatile flammables such as thinner or gasoline are handled.

Only use pipes, nuts, and tools intended for exclusive use with R-32 refrigerant in compliance with national codes (ASHRAE15 or IRC).

Do not mix air or gas other than R-32 in the refrigerant system. If air enters the refrigerant system, an excessively high pressure results, which may cause equipment damage or injury.

Do not use means to accelerate the defrosting process or to clean, other than those recommended by the manufacturer.

For more information, consult "Refrigerant Guidelines" on [page 63](#).

### WARNING

This equipment generates, uses, and can radiate radio frequency energy. If not installed and used in accordance with this instruction manual, it may cause interference with radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the owner will be required to correct the interference at the owner's own expense.

Daikin Applied disclaims any liability resulting from any interference or for the correction thereof.

### WARNING

When moving flammable A2L refrigerant to/from the unit from an auxiliary tank, a grounding strap must be used. An electrical charge builds when halo-carbon refrigerant travels in a rubber hose. A grounding strap must be used between the auxiliary refrigerant tank and the unit's end sheet (earth ground), which will safely take the charge to the ground. A fire risk could occur if this procedure is not followed.

### CAUTION

Static sensitive components. A static discharge while handling electronic circuit boards can cause damage to the components. Discharge any static electrical charge by touching the bare metal inside the control panel before performing any service work. Never unplug any cables, circuit board terminal blocks, or power plugs while power is applied to the panel.

**NOTICE**

**QUEBEC DISCLOSURE REGARDING AVAILABILITY OF REPLACEMENT PARTS, REPAIR SERVICES AND INFORMATION FOR MAINTENANCE AND REPAIR:** Daikin Applied Americas Inc. (Daikin Applied) does not guarantee the availability of (1) replacement parts; (2) repair services; and (3) information necessary to maintain or repair products, within the meaning of section 39.1 of the Consumer Protection Act, CQLR, c P-40.1 and section 79.18 of the Regulation respecting the application of the Consumer Protection Act, CQLR, c P-40.1, r. 3.

**AVIS POUR LE QUÉBEC CONCERNANT LA DISPONIBILITÉ DES PIÈCES DE RECHANGE, DES SERVICES DE RÉPARATION ET DES RENSEIGNEMENTS POUR L'ENTRETIEN ET LA RÉPARATION :** Daikin Applied Americas Inc. (Daikin Applied) ne garantit pas la disponibilité (1) des pièces de rechange, (2) des services de réparation et (3) des renseignements pour l'entretien et la réparation, au sens de l'article 39.1 de la Loi sur la protection du consommateur, RLRQ c P-40.1 et de l'article 79.18 du Règlement d'application de la Loi sur la protection du consommateur, RLRQ c P-40.1, r. 3.

**NOTICE**

Installation and maintenance are to be performed only by licensed, if required by local codes and regulations, or qualified personnel who are familiar with local codes and regulations and are experienced with this type of equipment.

## UL Compliance Statements for Unit Work

- All maintenance staff and others working in the local area shall be instructed on the nature of work being carried out. Work in confined spaces shall be avoided.
- Work shall be undertaken under a controlled procedure so as to minimize the risk of a flammable gas or vapor being present while the work is being performed.
- The area shall be checked with an appropriate refrigerant detector prior to and during work, to ensure the technician is aware of potentially toxic or flammable atmospheres. Ensure that the leak detection equipment being used is suitable for use with all applicable refrigerants, i.e., non-sparking, adequately sealed or intrinsically safe.
- If any hot work is to be conducted on the refrigerating equipment or any associated parts, appropriate fire extinguishing equipment shall be available at hand. Have a dry powder or CO2 fire extinguisher adjacent to the charging area.
- No person carrying out work in relation to a refrigeration system which involves exposing any pipe work shall use any sources of ignition in such a manner that it may lead to the risk of fire or explosion. All possible ignition sources, including cigarette smoking, should be kept sufficiently far away from the site of installation, repairing, removing and disposal, during which refrigerant can possibly be released to the surrounding space.
- Prior to work taking place, the area around the equipment is to be surveyed to make sure that there are no flammable hazards. Safety checks are necessary to ensure that the risk of ignition is minimized and "No Smoking" signs shall be displayed.

- Ensure that the area is in the open or that it is adequately ventilated before breaking into the system or conducting any hot work. A degree of ventilation shall continue during the period that the work is carried out. The ventilation should safely disperse any released refrigerant and preferably expel it externally into the atmosphere.
- Equipment not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction.
- Children shall not be allowed to play on or with equipment.
- If unit is permanently connected to water main; hose sets are not to be used.

## Unit Labels

Pictogram warning and informational labels may be present on the unit. Consult the table below for reference.

| Label                                                                                                               | Description                                            |
|---------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|
|  Refrigerant class per<br>ISO 817 | WARNING - flammable refrigerant present                |
|                                  | Read the technical manual for service instructions     |
|                                 | WARNING - A2L low-burning velocity refrigerant present |
|                                 | Pressurized medium present                             |
|                                 | Ultraviolet (UV) radiation present                     |
|                                 | Read the technical manual for instructions             |
|                                 | WARNING - flammable refrigerant present                |



# Introduction

## Model Nomenclature

**Table 1: Model Nomenclature**

| 1 | 2-3 | 4 | 5-7 | 8 | 9 | 10-12 | 13 | 14 | 15-16 | 17 | 18 | 19-20 | 21 | 22 | 23-24 | 25 | 26 |
|---|-----|---|-----|---|---|-------|----|----|-------|----|----|-------|----|----|-------|----|----|
| W | SV  | C | 024 | E | 1 | TTY   | C  | M  | 13    | A  | Y  | YY    | S  | Y  | YY    | Y  | Y  |

| 27 | 28 | 29 | 30-32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 | 43-44 | 45-47 | 48-50 |
|----|----|----|-------|----|----|----|----|----|----|----|----|----|----|-------|-------|-------|
| Y  | N  | Y  | 088   | Y  | Y  | Y  | Y  | Y  | Y  | Y  | S  | 2  | L  | YY    | YYY   | YYY   |

| Category                | Code Position | Code | = | Description                                  |
|-------------------------|---------------|------|---|----------------------------------------------|
| Product Category        | 1             | W    | = | Water Source Heat Pump                       |
| Model Type              | 2-3           | SV   | = | SmartSource Vertical Stack                   |
| Configuration           | 4             | C    | = | Chassis                                      |
|                         |               | F    | = | Cabinet                                      |
| Nominal Capacity        | 5-7           | 009  | = | 9,000 Btu/h Nominal Cooling                  |
|                         |               | 012  | = | 12,000 Btu/h Nominal Cooling                 |
|                         |               | 015  | = | 15,000 Btu/h Nominal Cooling                 |
|                         |               | 018  | = | 18,000 Btu/h Nominal Cooling                 |
|                         |               | 024  | = | 24,000 Btu/h Nominal Cooling                 |
|                         |               | 030  | = | 30,000 Btu/h Nominal Cooling                 |
|                         |               | 036  | = | 36,000 Btu/h Nominal Cooling                 |
| Voltage                 | 8             | A    | = | 115/60/1 (Sizes 009 and 012 Only)            |
|                         |               | E    | = | 208-230/60/1                                 |
|                         |               | J    | = | 265/60/1                                     |
| Design Series (Vintage) | 9             | 1    | = | Design Series 1                              |
| Discharge Air           | 10            | B**  | = | Primary Supply - Back                        |
|                         |               | F**  | = | Primary Supply - Front                       |
|                         |               | L**  | = | Primary Supply - Left                        |
|                         |               | R**  | = | Primary Supply - Right                       |
|                         |               | T**  | = | Primary Supply - Top                         |
|                         |               | Y**  | = | None (Chassis Only)                          |
|                         | 11            | *B*  | = | Secondary Supply - Back                      |
|                         |               | *F*  | = | Secondary Supply - Front                     |
|                         |               | *L*  | = | Secondary Supply - Left                      |
|                         |               | *R*  | = | Secondary Supply - Right                     |
|                         |               | *T*  | = | Secondary Supply - Top                       |
|                         |               | *Y*  | = | None (Chassis Only)                          |
|                         | 12            | **T  | = | Tertiary - Top (88", 92", 96" Cabinets Only) |
|                         |               | **Y  | = | None (Chassis Only)                          |
| Water Coil Type         | 13            | C    | = | Copper Inner Tube                            |
|                         |               | G    | = | Copper Inner Tube - Geothermal               |
|                         |               | S    | = | Cupronickel Inner Tube                       |
|                         |               | J    | = | Cupronickel Inner Tube - Geothermal          |
|                         |               | Y    | = | None (Cabinet Only)                          |
| Unit Control            | 14            | M    | = | MicroTech Unit Controller                    |
|                         |               | B    | = | MicroTech Unit Controller + BACnet           |
|                         |               | T    | = | MicroTech Unit Controller + Wireless         |
| Fan Motor Options       | 15            | 1*   | = | PSC                                          |
|                         |               | 3*   | = | ECM - Constant CFM (015-036)                 |
|                         |               | 5*   | = | ECM - Constant Torque (009-012)              |
|                         | 16            | *3   | = | 2-Speed Fan - Unit Toggle Switch (PSC Only)  |
|                         |               | *4   | = | PWM Controlled (ECM Only)                    |

| Category               | Code Position | Code | = | Description                                                                  |                          |
|------------------------|---------------|------|---|------------------------------------------------------------------------------|--------------------------|
| Insulation             | 17            | A    | = | 1/2" Fiberglass - Skin Faced                                                 |                          |
|                        |               | E    | = | 3/8" Closed Cell Foam                                                        |                          |
|                        |               | F    | = | 1/2" Fiberglass - Foil Faced                                                 |                          |
| Sound Package          | 18            | S    | = | Mass Plate                                                                   | Chassis Only             |
|                        |               | M    | = | Mass Plate & Compressor Blanket (Sizes 024-036)                              |                          |
|                        |               | Y    | = | None                                                                         |                          |
| Supplemental Heating   | 19            | H*   | = | Hot Water Coil - 1-Row                                                       | Requires EC Motor Option |
|                        |               | J*   | = | Hot Water Coil - 2-Row                                                       |                          |
|                        |               | Y*   | = | None                                                                         |                          |
|                        | 20            | *V   | = | 3-Way Motorized Valve for Hot Water Coil                                     |                          |
|                        |               | *Y   | = | None                                                                         |                          |
| Filters                | 21            | S    | = | Standard, 1" Fiberglass                                                      |                          |
|                        |               | M    | = | 1" MERV 8                                                                    |                          |
|                        |               | H    | = | 2" MERV 13 (Requires EC Motor Option)                                        |                          |
|                        |               | Y    | = | None (Chassis Only)                                                          |                          |
| Water Flow Options     | 22            | C    | = | 2-Way Motorized Iso-Valve, General Close-Off Pressure N.C. (Normally Closed) |                          |
|                        |               | V    | = | 2-Way Motorized Iso-Valve, General Close-Off Pressure N.O. (Normally Open)   |                          |
|                        |               | H    | = | 2-Way Motorized Iso-Valve, High Close-Off Pressure N.C. (Normally Closed)    |                          |
|                        |               | E    | = | 3-Way Motorized Iso-Valve, General Close-Off Pressure N.C. (Normally Closed) |                          |
|                        |               | G    | = | 3-Way Motorized Iso-Valve, High Close-Off Pressure N.C. (Normally Closed)    |                          |
|                        |               | Y    | = | None                                                                         |                          |
| Piping Package         | 23            | B*   | = | Auto Flow Regulator 1.5 GPM                                                  |                          |
|                        |               | C*   | = | Auto Flow Regulator 2.0 GPM                                                  |                          |
|                        |               | D*   | = | Auto Flow Regulator 2.5 GPM                                                  |                          |
|                        |               | E*   | = | Auto Flow Regulator 3.0 GPM                                                  |                          |
|                        |               | F*   | = | Auto Flow Regulator 3.5 GPM                                                  |                          |
|                        |               | G*   | = | Auto Flow Regulator 4.0 GPM                                                  |                          |
|                        |               | H*   | = | Auto Flow Regulator 4.5 GPM                                                  |                          |
|                        |               | I*   | = | Auto Flow Regulator 5.0 GPM                                                  |                          |
|                        |               | J*   | = | Auto Flow Regulator 5.5 GPM                                                  |                          |
|                        |               | K*   | = | Auto Flow Regulator 6.0 GPM                                                  |                          |
|                        |               | L*   | = | Auto Flow Regulator 7.0 GPM                                                  |                          |
|                        |               | M*   | = | Auto Flow Regulator 8.0 GPM                                                  |                          |
|                        |               | N*   | = | Auto Flow Regulator 9.0 GPM                                                  |                          |
|                        |               | O*   | = | Auto Flow Regulator 10.5 GPM                                                 |                          |
|                        |               | Y*   | = | None                                                                         |                          |
|                        | 24            | *S   | = | Strainer                                                                     |                          |
|                        |               | *Y   | = | None                                                                         |                          |
| Future Use             | 25            | Y    | = | None                                                                         |                          |
| Corrosion Protection   | 26            | C    | = | Anti-Coil Corrosion Protection Package                                       |                          |
|                        |               | Y    | = | None                                                                         |                          |
| Future Use             | 27            | Y    | = | None                                                                         |                          |
| Electrical Options     | 28            | F    | = | Fused Disconnect with Wire Harness (Sizes 009-018)                           |                          |
|                        |               | N    | = | Non-Fused Disconnect with Wire Harness                                       |                          |
|                        |               | H    | = | HACR Breaker (115V/208-230V Only)                                            |                          |
| Power & Control Access | 29            | S    | = | Side                                                                         | Cabinet Only             |
|                        |               | T    | = | Top (88", 92", 96" Cabinets Only)                                            |                          |
|                        |               | Y    | = | None (Chassis Only)                                                          |                          |
| Cabinet Height         | 30-32         | 080  | = | 80" Cabinet Height                                                           | Cabinet Only             |
|                        |               | 088  | = | 88" Cabinet Height                                                           |                          |
|                        |               | 092  | = | 92" Cabinet Height                                                           |                          |
|                        |               | 096  | = | 96" Cabinet Height                                                           |                          |
|                        |               | KDN  | = | 63.5" Cabinet Height                                                         |                          |
|                        |               | YYY  | = | None (Chassis Only)                                                          |                          |

| Category                         | Code Position | Code | = | Description                                                                      |                                                                                                   |
|----------------------------------|---------------|------|---|----------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| Factory-Installed Subbase        | 33            | 2    | = | 2" Subbase                                                                       | Cabinet Only; 96" Cabinets with a Subbase must Ship Horizontally with Packaging Selection 1 or 2. |
|                                  |               | 3    | = | 3" Subbase                                                                       |                                                                                                   |
|                                  |               | 4    | = | 4" Subbase                                                                       |                                                                                                   |
|                                  |               | 5    | = | 5" Subbase                                                                       |                                                                                                   |
|                                  |               | Y    | = | None                                                                             |                                                                                                   |
| Secondary Drain Pan              | 34            | G    | = | Galvanized                                                                       |                                                                                                   |
|                                  |               | S    | = | Stainless Steel                                                                  |                                                                                                   |
|                                  |               | Y    | = | None (Chassis Only)                                                              |                                                                                                   |
| Riser Location                   | 35            | L    | = | Left Cabinet                                                                     |                                                                                                   |
|                                  |               | R    | = | Right Cabinet                                                                    |                                                                                                   |
|                                  |               | B    | = | Back Cabinet                                                                     |                                                                                                   |
|                                  |               | A    | = | Alternate Back Cabinet Piping                                                    |                                                                                                   |
|                                  |               | Y    | = | None                                                                             |                                                                                                   |
| Riser Mounting                   | 36            | F    | = | Factory Supplied - Shipped Attached (N/A with Packaging Selection 4,5,8, or 9)   |                                                                                                   |
|                                  |               | J    | = | Factory Supplied - Shipped Loose                                                 |                                                                                                   |
|                                  |               | Y    | = | None                                                                             |                                                                                                   |
| Future                           | 37            | Y    | = | None                                                                             |                                                                                                   |
| Future                           | 38            | Y    | = | None                                                                             |                                                                                                   |
| Future                           | 39            | Y    | = | None                                                                             |                                                                                                   |
| Standard or Special              | 40            | S    | = | Standard                                                                         |                                                                                                   |
|                                  |               | X    | = | Special                                                                          |                                                                                                   |
| Packaging                        | 41            | 1    | = | Standard Packaging                                                               | Requires Full Truckload Shipment                                                                  |
|                                  |               | 2    | = | Multipack Cabinets - Multiple Cabinets on 1 Pallet Group                         |                                                                                                   |
|                                  |               | 6    | = | 63.5" (KDN) Cabinet Multipack - 4 per Pallet                                     |                                                                                                   |
|                                  |               | 7    | = | 63.5" (KDN) Single Cabinet - 1 per Pallet                                        |                                                                                                   |
|                                  |               | 4    | = | Single Packaging Cabinet Shipped Vertically                                      |                                                                                                   |
|                                  |               | 5    | = | Multipack Cabinet Shipped Vertically - Multiple Cabinets on One Pallet Group     |                                                                                                   |
|                                  |               | 8    | = | Single Packaging Chassis + Cabinet                                               |                                                                                                   |
|                                  |               | 9    | = | Multipack Chassis + Cabinet - Multiple Cabinets on One Pallet Group              |                                                                                                   |
|                                  |               |      |   |                                                                                  |                                                                                                   |
| Extended Warranty                | 42            | F    | = | 4 Year Extended Compressor Only Parts Warranty with 1st Year Labor Allowance     |                                                                                                   |
|                                  |               | H    | = | 4 Year Extended Refrigerant Circuit Parts Warranty with 1st Year Labor Allowance |                                                                                                   |
|                                  |               | J    | = | 4 Year Extended Complete Unit Parts Warranty with 1st Year Labor Allowance       |                                                                                                   |
|                                  |               | L    | = | First Year Labor Allowance                                                       |                                                                                                   |
|                                  |               | M    | = | 1 Year Extended Compressor Only Parts Warranty with 1st Year Labor Allowance     |                                                                                                   |
|                                  |               | N    | = | 1 Year Extended Refrigerant Circuit Parts Warranty with 1st Year Labor Allowance |                                                                                                   |
|                                  |               | S    | = | 1 Year Extended Complete Unit Parts Warranty with 1st Year Labor Allowance       |                                                                                                   |
|                                  |               | T    | = | 4 Year Extended Complete Unit Parts Warranty with Labor Allowance                |                                                                                                   |
| Secondary Connection Stub Length | 43-44         | YY   | = | None                                                                             |                                                                                                   |
|                                  |               | 06   | = | 6" Stub Out                                                                      |                                                                                                   |
| Riser Extension Above Cabinet    | 45-47         | YYY  | = | None                                                                             |                                                                                                   |
|                                  |               | A**  | = | 0-20" Maximum                                                                    |                                                                                                   |
| Riser Extension Below Cabinet    | 48-50         | YYY  | = | None                                                                             |                                                                                                   |
|                                  |               | B**  | = | 0-20" Maximum                                                                    |                                                                                                   |

## General Information

Daikin Applied Vertical Stack units are designed for use in multiple floor apartments, condominiums, hotels, nursing homes, and other similar applications. They require a minimum amount of floor space and are designed for multiple discharge arrangement.

Installation and maintenance must follow accepted industry practices as described in the ASHRAE Handbook, the National Electric Code, and other applicable standards. Install this equipment in accordance with regulations of authorities having jurisdiction and with all applicable codes.



### CAUTION

Installation and maintenance are to be performed by qualified personnel who are familiar with local codes and regulations and experienced with this type of equipment.



### WARNING

The installer must determine and follow all applicable codes and regulations. This equipment presents hazards of electricity, rotating parts, sharp edges, heat and weight. Failure to read and follow these instructions can result in property damage, severe personal injury, or death. This equipment must be installed by experienced, trained personnel only.



### CAUTION

Sharp metal edges are a hazard, use care when servicing to avoid contact with them.



### WARNING

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

Children should be supervised to ensure that they do not play with the appliance.

This appliance shall be installed in accordance with national wiring regulations (national electric code, Canadian electric code).

## Receiving and Handling

Carefully check equipment against the bill of lading to ensure all items have been received. Before unloading any unit, check the nameplate to make sure the voltage complies with the power supply available.

Inspect all units for damage upon arrival. If a unit has become dirty during shipment, carefully clean it prior to completing the inspection. Daikin Applied is not responsible for physical damage after the unit leaves the factory unless the contract with Daikin Applied states otherwise.

Check the unit data plate to be sure the unit electrical agrees with the power supply available.

DO NOT handle units by the riser piping. Riser clamps hold the riser in position; they are not designed to support the cabinet weight. The clamps are removed after the unit is installed.

### NOTICE

All units should be carefully inspected for damage when received. Report all loss or shipping damage using a claim form supplied by Daikin Applied.

**VISIBLE LOSS OR DAMAGE:** Any external evidence of loss or damage must be noted on the freight bill or carrier's receipt, and signed by the carrier's agent. Failure to adequately describe such external evidence of loss or damage may result in the carrier's refusal to honor a damage claim.

**CONCEALED LOSS OR DAMAGE:** Concealed loss or damage means loss or damage which does not become apparent until the unit has been unpacked or unwrapped. The contents may be damaged in transit due to rough handling even though the exterior may not show damages. When the damage is discovered, make a written request for inspection by the carrier's agent within **five (5) days** of the delivery date and file a claim with the form provided by Daikin Applied. Refer to the Daikin Applied Freight Policy for further information.


## Storage and Operating Environment

Temporary storage at the job site must be indoor, completely sheltered from rain, snow, etc. Units should not be installed in environments that fall below freezing or exceed 140°F ambient.

## Standard Packaging - Cabinet or Cabinet with Risers

Cabinets with standard packaging or with risers attached ship horizontally. Do not stack horizontally shipped units over three crates high at any time during transportation or storage.

**Figure 1: Cabinets Shipped Horizontally (One Unit per Crate)**

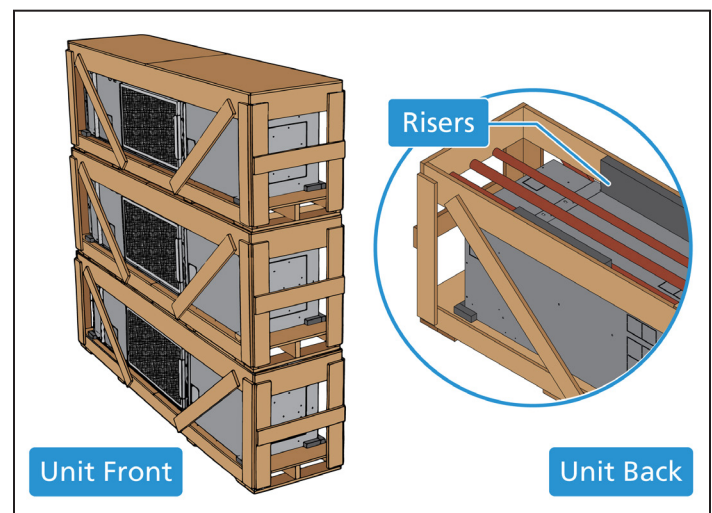

**NOTE:** Do not stack horizontally shipped cabinets over three crates high.

### NOTICE

When selected, risers are factory supplied with cabinet for field installation.



## Standard Packaging - Chassis Only

Do not stack chassis over two skid high at any time during transportation or storage. For storing, each carton is marked with "up" arrows.

**Figure 2: Chassis Stacking (Four Units per Skid Shown)**



**NOTE:** Do not stack over two skid high.

## Cabinets Shipped Vertically, 63.5" (KDN) Cabinets, or Chassis Shipped Inside Cabinet

Cabinets shipped vertically, 63.5" (KDN) cabinets, and units with the chassis shipped inside the cabinet cannot be stacked at any time during transportation or storage.

**Figure 3: Chassis Shipped Inside Cabinet (Four Units per Skid Shown)**



**NOTE:** Do not stack skids of the chassis shipped inside the cabinet.

**Table 2: Overall Shipping Dimensions for 63.5" (KDN) Cabinet Without Factory Attached Risers**

| Unit Size | Overall Dimensions          |
|-----------|-----------------------------|
| 009-012   | 42-5/8" x 45-1/2" x 67-5/8" |
| 015-018   | 46-5/8" x 46-3/8" x 67-5/8" |
| 024-036   | 54-5/8" x 57-1/2" x 67-5/8" |

**NOTE:** 63.5" high cabinets ship vertically from 1 to 4 per skid, similar to vertically shipped cabinets.

**Table 3: Overall Dimensions or Standard Cabinet Packing**

| Unit Size |                         | Cabinet Size                   |                                |                                |
|-----------|-------------------------|--------------------------------|--------------------------------|--------------------------------|
|           |                         | 18 x 18                        | 18 x 20                        | 24 x 24                        |
| 009-012   | With Riser <sup>1</sup> | 21"W x 29"H x 91.5" to 124.5"L |                                |                                |
|           | Without Risers          | 21"W x 27"H x 91.5" to 107.5"L |                                |                                |
| 015-018   | With Riser <sup>1</sup> |                                | 21"W x 31"H x 91.5" to 124.5"L |                                |
|           | Without Risers          |                                | 21"W x 29"H x 91.5" to 107.5"L |                                |
| 024-036   | With Riser <sup>1</sup> |                                |                                | 27"W x 35"H x 91.5" to 124.5"L |
|           | Without Risers          |                                |                                | 27"W x 23"H x 91.5" to 107.5"L |

<sup>1</sup> Risers are factory supplied with cabinet for field installation.

## Component Descriptions (Assembled Cabinet)

- Cabinet assembly complete (without chassis):
  - Pipe riser sets (return, supply, and condensate)
  - Inner front panel and filter bracket
- Cooling and heating chassis (shipped separately or inside cabinet)
- Return air grille/panel (accessory)
- Double-deflection diffuser (accessory)

Unit cabinets are factory assembled and wired and have individual thermostat control capability. They are installed by stacking one unit on top of the other. While installing, prevent dirt and other foreign matter from entering the risers and plugging lines or valves.

## Prior to Installing


### Removing Chassis from Cabinet when Shipped Together

When the chassis is shipped inside the cabinet, the chassis must be removed from the unit cabinet before the unit can be installed. The chassis is secured to the cabinet with two brackets to prevent movement during shipping.

To remove the chassis from the cabinet, do the following:

1. Remove ten screws from front panel/filter rack and lift panel off to gain access to the cabinet interior. Retain all screws. (Figure 7).
2. Remove two bolts securing shipping brackets on the front left and right side of the chassis. Discard brackets and bolts.

**Figure 4: Remove Shipping Brackets**

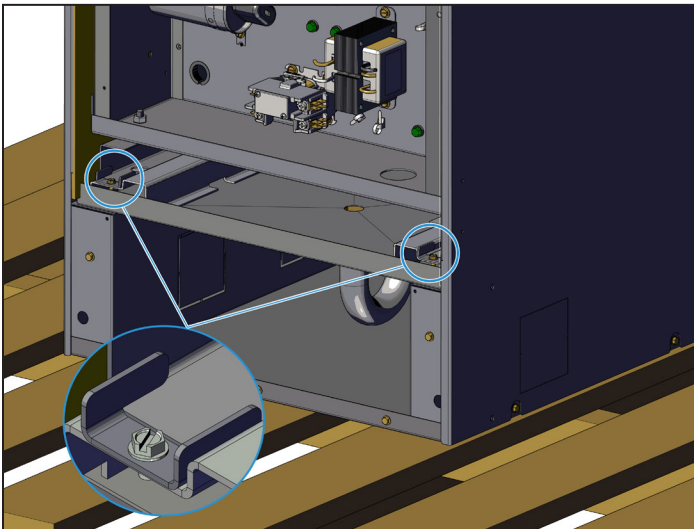

3. Remove chassis from cabinet.
4. Follow steps in "Installation" on page 32 to complete unit installation.

#### NOTICE

Remove protective plastic covering from chassis prior to installation.


### Disassembling Upper and Lower Cabinet Sections

The vertical stack unit cabinet ships completely assembled. The unit may be disassembled into two sections to make it easier to handle; the upper-fan/discharge cabinet and lower cabinet/return air cabinet.

To disassemble, do the following:

1. Remove risers (if received attached).
2. Remove the two screws (bottom row) on the back of the unit as shown in Figure 5.

**Figure 5: Cabinet Disassembly Screw Removal (Rear)**

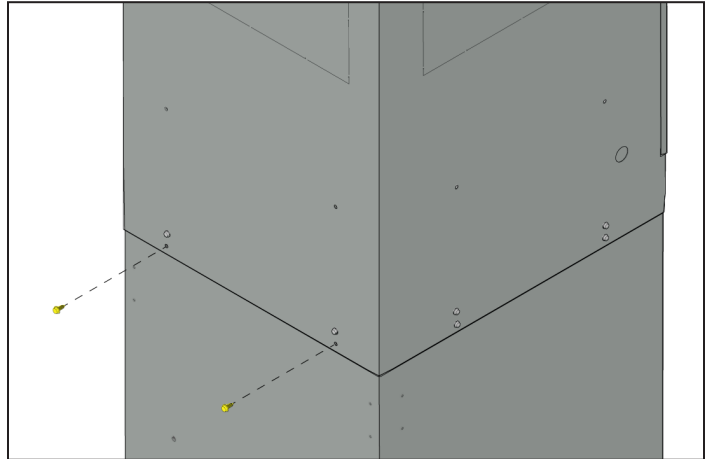


#### NOTICE


Retain all screws for later use to reassemble unit in reverse order as described in steps 1-6. Number of screws will vary depending on unit size.

3. Carefully lay the unit down on its back and remove the remaining four screws on the left and right side of the cabinet (Figure 6).

**Figure 6: Cabinet Disassembly Screw Removal (Side)**

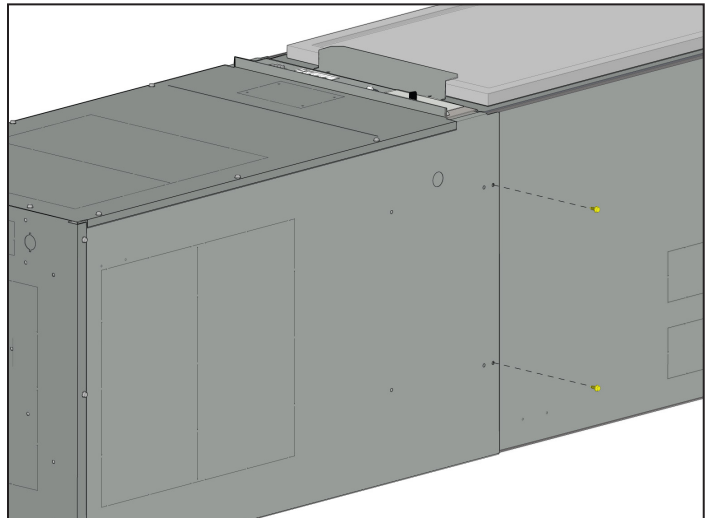


4. Remove the ten screws and lift off the front panel/filter rack to gain access to the cabinet interior (Figure 7).

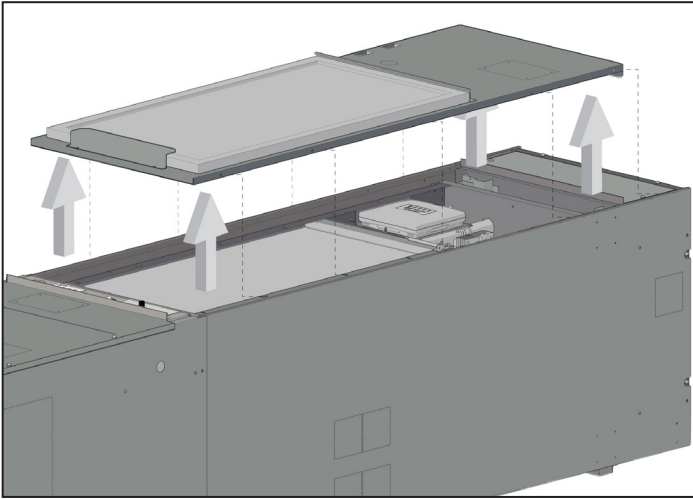**Figure 7: Cabinet Disassembly Screw Removal (Front)**


5. Locate and remove the six screws located inside the cabinet joining the upper and lower cabinet sections.

**NOTICE**

Pull the insulation away from the walls of the cabinet interior to get access to the screws.

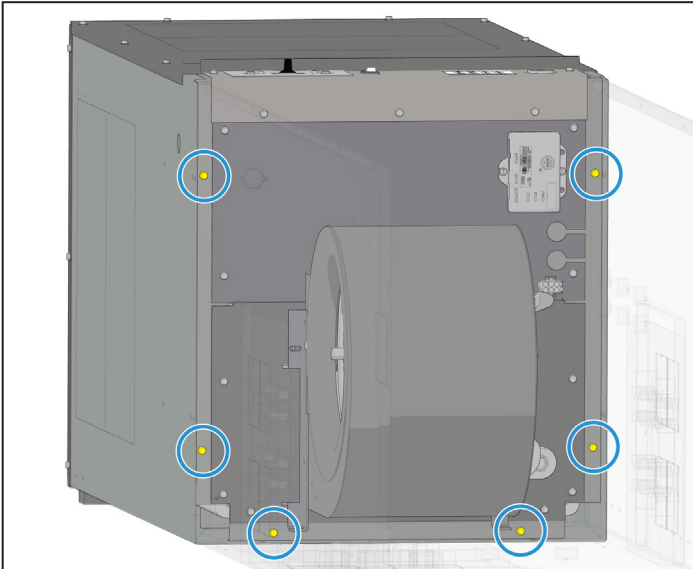**Figure 8: Cabinet Disassembly Screw Removal (Inside Unit)**

6. Separate the lower return air cabinet section from the upper blower/discharge cabinet section.

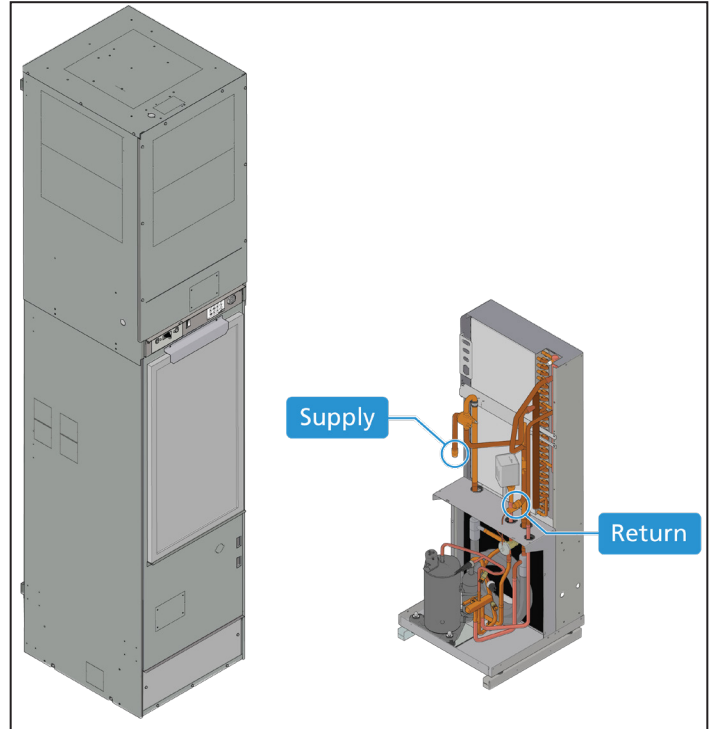**Figure 9: Unit Cabinet (WSVF) and Chassis (WSVC)****Pre-Installation Considerations**

1. To prevent damage to equipment, do not operate as supplementary heating and cooling during the construction period.
2. Inspect the carton for any specific tagging numbers indicated by the factory per a request from the installing contractor. At this time the voltage, phase and capacity should be checked against the plans.
3. Check the unit size against the plans to verify that the unit is being installed in the correct location.
4. Before installation, check the available dimensions of the area where the unit is to be installed versus the dimensions of the unit.
5. Note the location and routing of water piping, condensate drain piping, and electrical wiring. The locations of these items are clearly marked on submittal drawings.
6. The installing contractor will find it beneficial to confer with piping, sheet metal, and electrical foremen before installing any unit.

**NOTICE**

Check the unit data plate for correct voltage with the plans before installing the equipment.

**WARNING**

Make sure all electrical ground connections are made in accordance with local code.

**WARNING**

The contractor shall cover the units to protect the machines during finishing of the building. This is critical while spraying fireproofing material on bar joists, sandblasting, spray painting and plastering.

### ***For Optimum Unit Performance and to Help Minimize Noise and Vibration***


- Adhere to the "Critical Dimensions" for locations of framing and distances to the cabinet.
- Be sure there are no kinks and that the stainless steel braided hoses do not come in contact with and vibrate on chassis and cause noise.
- Be sure there are no kinks in the condensate drain hose that can restrict flow of condensate to the drain riser.
- Ensure there is no metal-to-metal contact between return air grille and cabinet and the discharge diffuser and the cabinet, use provided gaskets.
- Air balancing in ducted applications is critical for proper airflow at each diffuser.
- It is recommended that all unused openings in the cabinet be sealed to eliminate any air leakage from the cabinet.

**NOTICE**


Top air discharge units will require turning vanes and/or a volume damper for proper air flow and balancing, to minimize turbulence. These components must be field-installed and furnished in accordance with SMACNA guidelines.





## **Configurations**

**Figure 10: Single-Side Discharge**

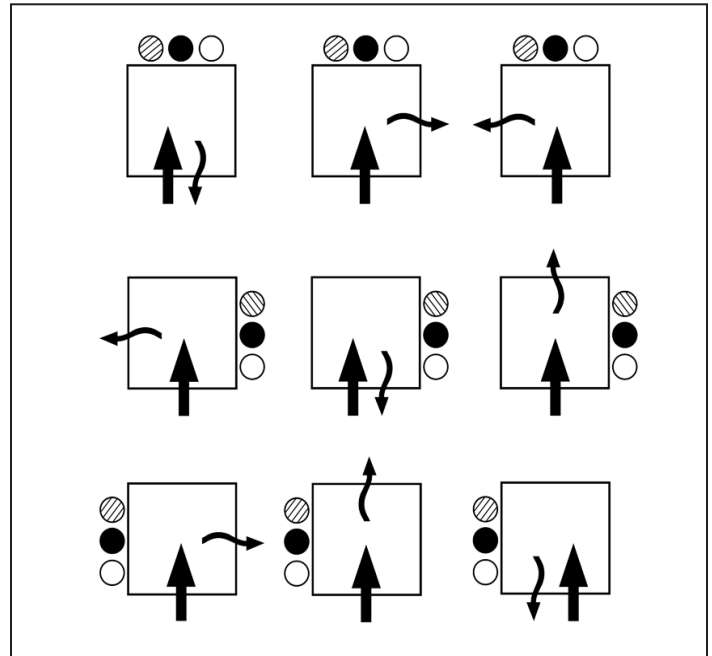

**Figure 11: Double-Side Discharge**

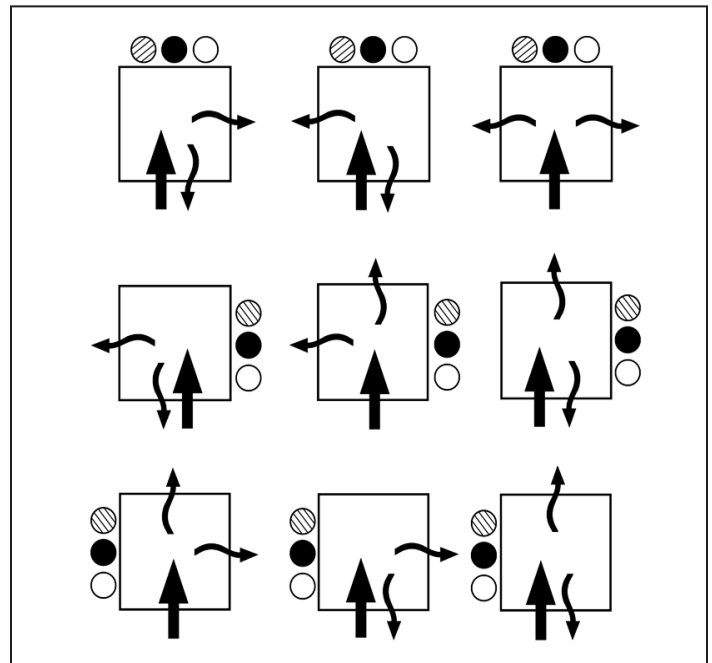

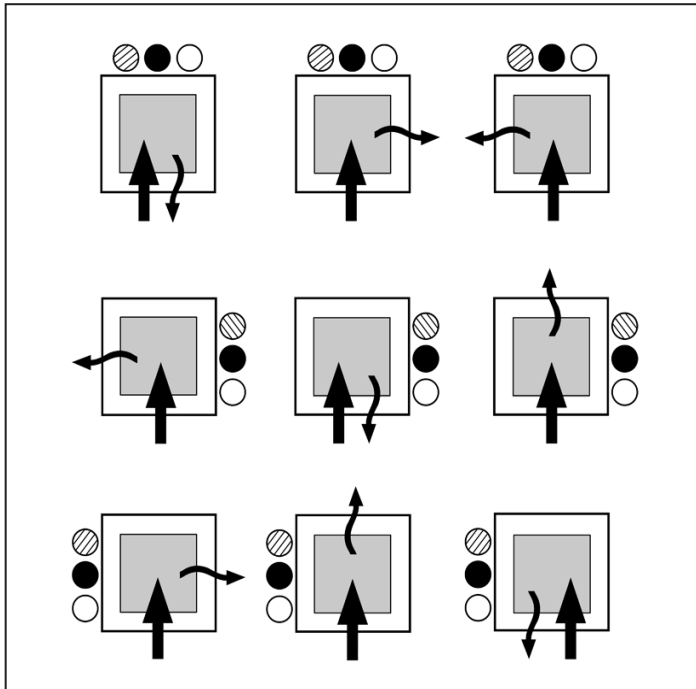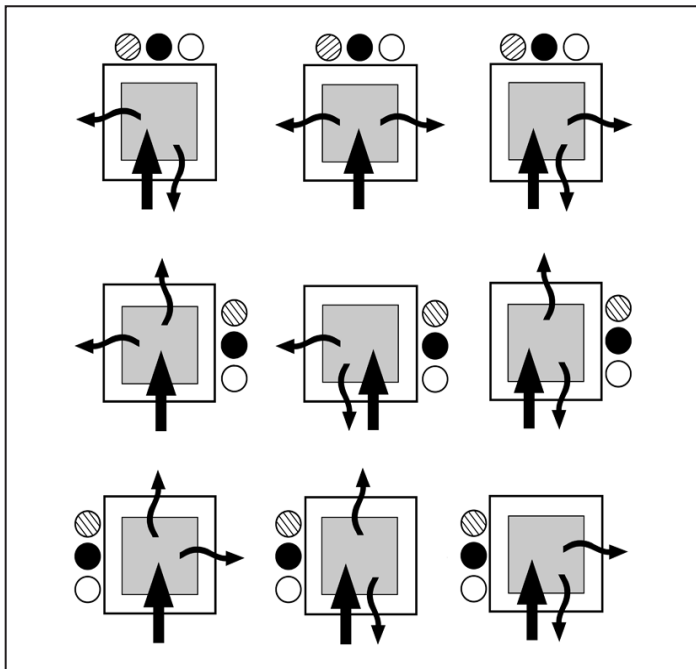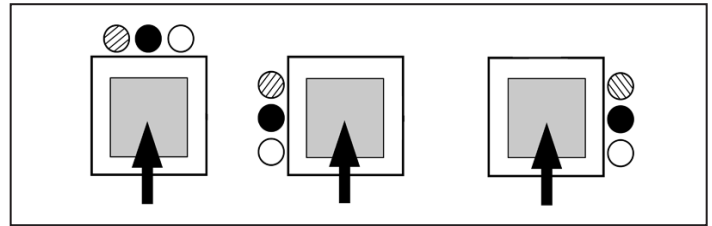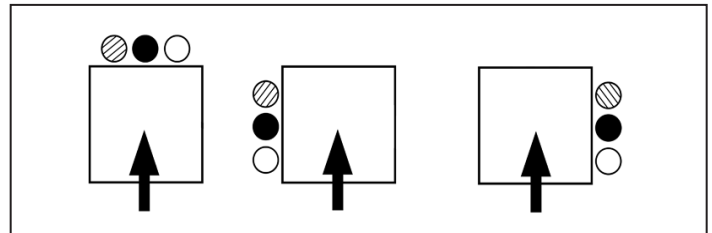**Figure 12: Side and Top Discharge****Figure 13: Double-Side and Top Discharge****Figure 14: Single Discharge – Top Only****Figure 15: Closed Plenum – Field Modification Required**

(Hatched Circle) = Return Riser      (Solid Black Circle) = Supply Riser      (White Circle) = Drain  
 (Straight Arrow) = Return Air      (Curved Arrow) = Discharge Air      (Gray Square) = Top Discharge

**NOTICE**


80" high cabinet not available with side discharge, top discharge only.





**NOTE:** 1' Alternative riser locations dimensions mirror those shown as "T", "U", and "V"  
**NOTE:** NR = Not Recommended  
 80" high cabinet not available with side discharge, top discharge only.

## Model WSVF – 18" × 20" Cabinet – Size 015-018

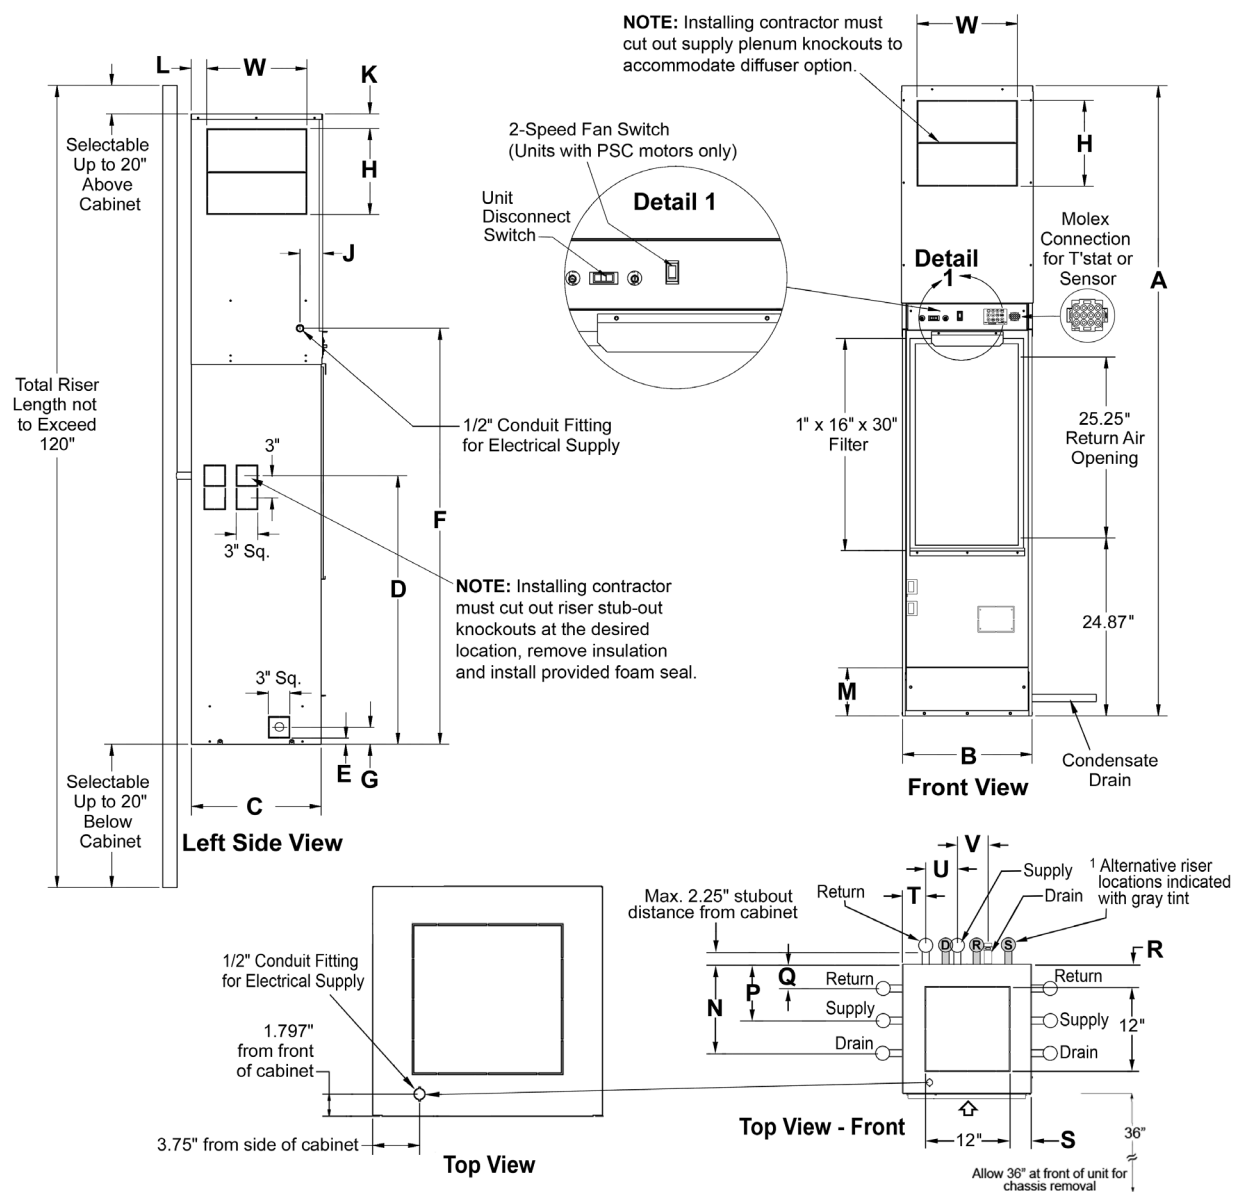


## Dimensions

| Unit Size 015-018 (18" × 20") Cabinet (Dimensions in inches) |        |       |        |      |        |      |                     |     |     |      |      |     |     |     |     |      |     |     |
|--------------------------------------------------------------|--------|-------|--------|------|--------|------|---------------------|-----|-----|------|------|-----|-----|-----|-----|------|-----|-----|
| Unit Height "A"                                              | B      | C     | D      | E    | F      | G    | J                   | K   | L   | M    | N    | P   | Q   | R   | S   | T    | U   | V   |
| 80, 88,<br>92, 96                                            | 18.07  | 20.00 | 37.50  | 0.88 | 58.09  | 2.38 | 3.125               | 2.0 | 3.0 | 6.72 | 12.4 | 7.9 | 3.3 | 4.0 | 3.0 | 3.12 | 4.5 | 4.5 |
| Discharge Openings (Dimensions in inches)                    |        |       |        |      |        |      |                     |     |     |      |      |     |     |     |     |      |     |     |
| Unit Size                                                    | Single |       | Double |      | Triple |      | Single- Top Opening |     |     |      |      |     |     |     |     |      |     |     |
| 015-018                                                      | W      | H     | W      | H    | W      | H    | W                   | H   |     |      |      |     |     |     |     |      |     |     |
|                                                              | 14     | 16    | 14     | 8    | 14     | 8    | 12                  | 12  |     |      |      |     |     |     |     |      |     |     |

**NOTE:** <sup>1</sup> Alternative riser locations dimensions mirror those shown as "T", "U", and "V"

**NOTE:** 80" high cabinet not available with side discharge, top discharge only.

## Model WSVF – 24" × 24" Cabinet – Size 024-036

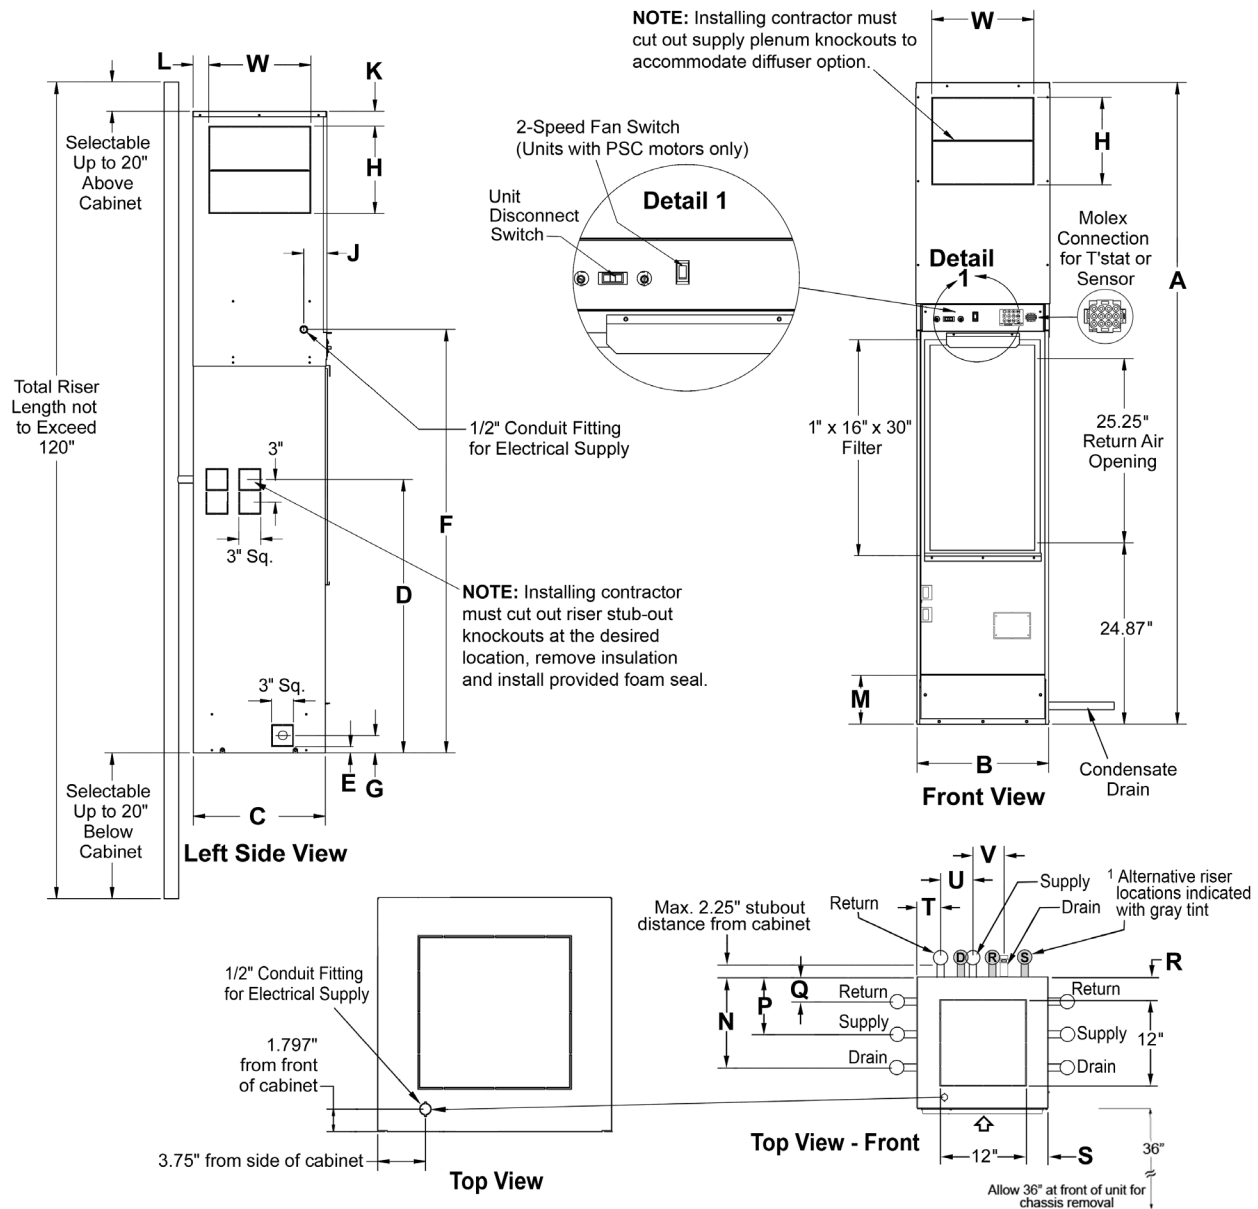


## Dimensions

| Unit Size 024-036 (24" × 24") Cabinet (Dimensions in inches) |        |       |        |      |        |      |                     |     |     |      |      |     |     |      |      |      |     |     |
|--------------------------------------------------------------|--------|-------|--------|------|--------|------|---------------------|-----|-----|------|------|-----|-----|------|------|------|-----|-----|
| Unit Height "A"                                              | B      | C     | D      | E    | F      | G    | J                   | K   | L   | M    | N    | P   | Q   | R    | S    | T    | U   | V   |
| 80, 88, 92, 96                                               | 24.00  | 24.04 | 37.50  | 0.88 | 58.08  | 2.38 | 4.54                | 2.0 | 3.0 | 6.72 | 12.4 | 7.9 | 3.3 | 3.09 | 3.10 | 3.12 | 4.5 | 4.5 |
| Discharge Openings (Dimensions in inches)                    |        |       |        |      |        |      |                     |     |     |      |      |     |     |      |      |      |     |     |
| Unit Size                                                    | Single |       | Double |      | Triple |      | Single- Top Opening |     |     |      |      |     |     |      |      |      |     |     |
| 024                                                          | W      | H     | W      | H    | W      | H    | W                   | H   |     |      |      |     |     |      |      |      |     |     |
|                                                              | NR     | NR    | 18     | 10   | 18     | 10   | 18                  | 18  |     |      |      |     |     |      |      |      |     |     |
| 030-036                                                      | NR     | NR    | 18     | 14   | 18     | 10   | 18                  | 18  |     |      |      |     |     |      |      |      |     |     |

**NOTE:** NR = Not Recommended  
80" high cabinet not available with side discharge, top discharge only.

## Model WSVF 63.5" High Cabinet - Sizes 009-018

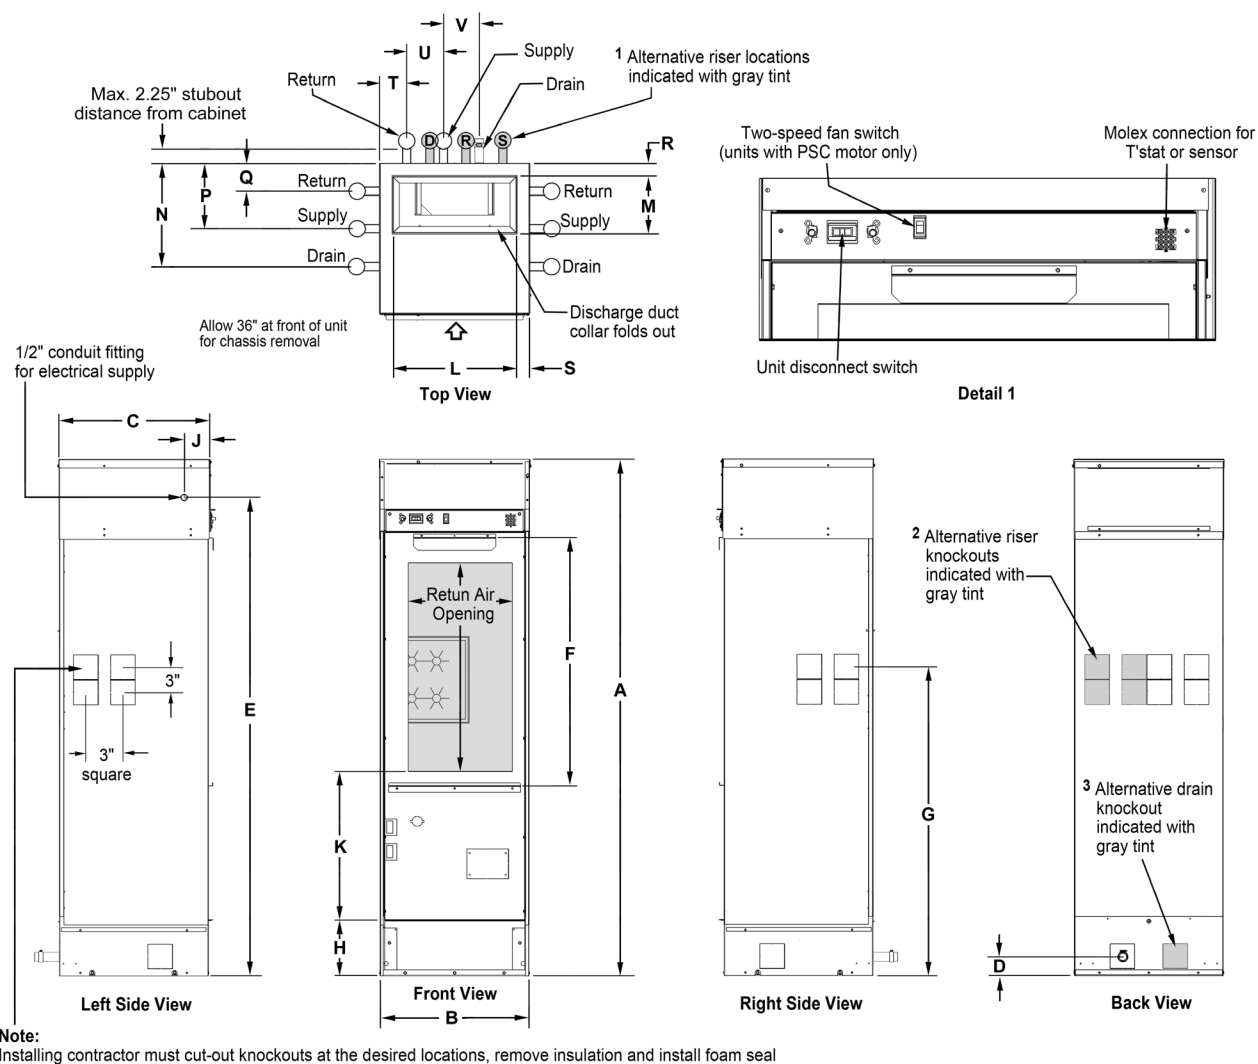

## Dimensions

| Cabinet                |                |       |       |      |       |                |                            |       |      |       |       |
|------------------------|----------------|-------|-------|------|-------|----------------|----------------------------|-------|------|-------|-------|
| Cabinet                | A <sup>4</sup> | B     | C     | D    | E     | Filter Size    | Return Air Opening (W x H) | G     | H    | J     | K     |
|                        |                |       |       |      |       | F (W x H x D)  |                            |       |      |       |       |
| 18 x 18 (Size 009-012) | 62.75          | 18.00 | 18.00 | 2.38 | 58.08 | 16" x 30" x 1" | 12.62 x 25.25              | 37.50 | 6.72 | 3.125 | 24.87 |
| 18 x 20 (Size 015-018) |                |       | 20.00 |      |       |                |                            |       |      |       |       |

| Top View               |                                    |      |      |     |     |      |      |      |      |      |
|------------------------|------------------------------------|------|------|-----|-----|------|------|------|------|------|
| Cabinet                | Discharge Air Opening <sup>5</sup> |      | N    | P   | Q   | R    | S    | T    | U    | V    |
|                        | L                                  | M    |      |     |     |      |      |      |      |      |
| 18 x 18 (Size 009-012) | 15.00                              | 6.80 | 12.4 | 7.9 | 3.3 | 1.64 | 1.64 | 3.12 | 4.50 | 4.50 |
| 18 x 20 (Size 015-018) |                                    | 8.80 |      |     |     |      |      |      |      |      |

**NOTE:** <sup>1</sup> Alternative riser locations dimensions mirror those shown as "T", "U", and "V"


<sup>2</sup> Alternative riser locations for unit sizes 009-018 are field-specified (code 22 = A)

<sup>3</sup> Alternative drain location for unit sizes 009-018 is field-specified (code 22 = A)

<sup>4</sup> Dimension "A" overall cabinet height is 63.5" with discharge duct collar folded out

<sup>5</sup> Dimensions "L" and "M" are the discharge air opening with the duct collar folded out

## Model WSVF 63.5" High Cabinet - Sizes 024-036

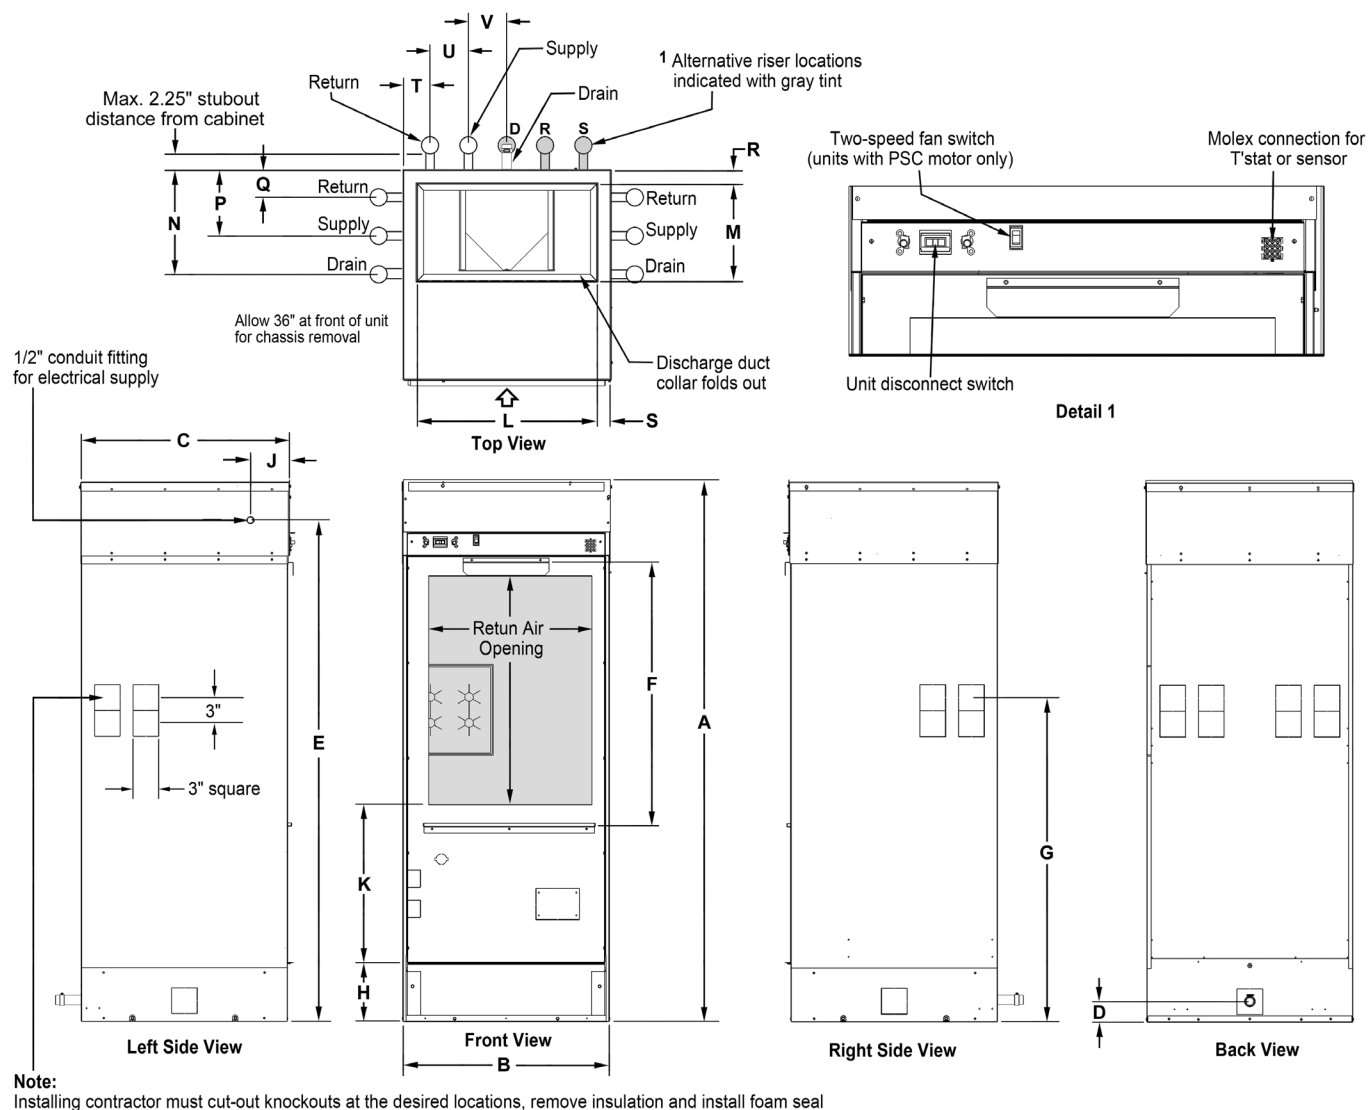

## Dimensions

| Cabinet                |                |       |       |      |       |                |                               |       |      |      |       |
|------------------------|----------------|-------|-------|------|-------|----------------|-------------------------------|-------|------|------|-------|
| Cabinet                | A <sup>4</sup> | B     | C     | D    | E     | Filter Size    | Return Air Opening<br>(W x H) | G     | H    | J    | K     |
|                        |                |       |       |      |       | F (W x H x D)  |                               |       |      |      |       |
| 24 x 24 (Size 024-036) | 62.75          | 24.00 | 24.00 | 2.38 | 58.08 | 20" x 30" x 1" | 19.00 x 26.50                 | 37.50 | 6.72 | 4.54 | 25.04 |

| Top View               |                                    |       |      |     |     |      |      |      |      |      |
|------------------------|------------------------------------|-------|------|-----|-----|------|------|------|------|------|
| Cabinet                | Discharge Air Opening <sup>5</sup> |       | N    | P   | Q   | R    | S    | T    | U    | V    |
|                        | L                                  | M     |      |     |     |      |      |      |      |      |
| 24 x 24 (Size 024-036) | 21.00                              | 11.25 | 12.4 | 7.9 | 3.3 | 1.64 | 1.64 | 3.12 | 4.50 | 4.50 |

**NOTE:** <sup>1</sup> Alternative riser locations dimensions mirror those shown as "T", "U", and "V". Knockouts are factory provided on unit sizes 024-036.


<sup>2</sup> Alternative riser locations for unit sizes 009-018 are field-specified (code 22 = A)

<sup>3</sup> Alternative drain location for unit sizes 009-018 is field-specified (code 22 = A)


<sup>4</sup> Dimension "A" overall cabinet height is 63.5" with discharge duct collar folded out

<sup>5</sup> Dimensions "L" and "M" are the discharge air opening with the duct collar folded out


## Chassis - Sizes 009-012

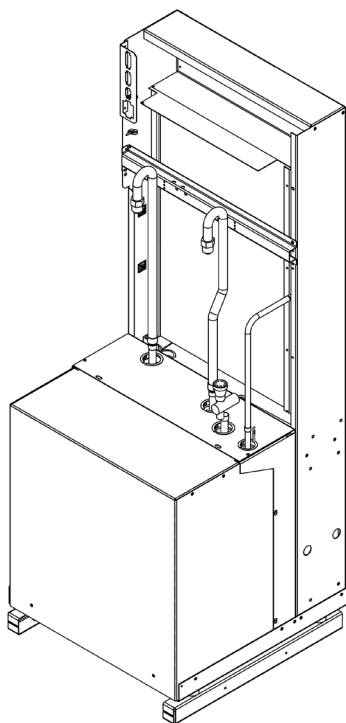


TOP VIEW



Ⓐ  
LEFT SIDE VIEW

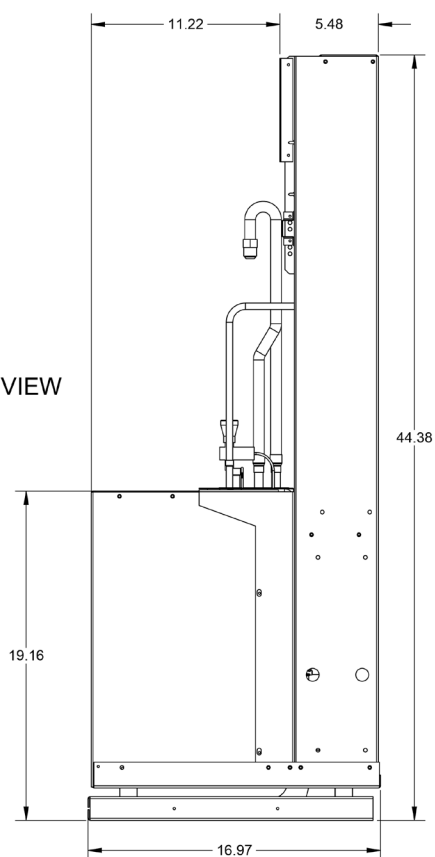


FRONT VIEW

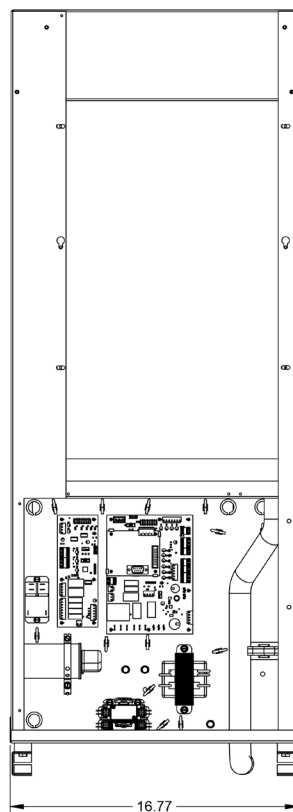





## Chassis - Sizes 015-018

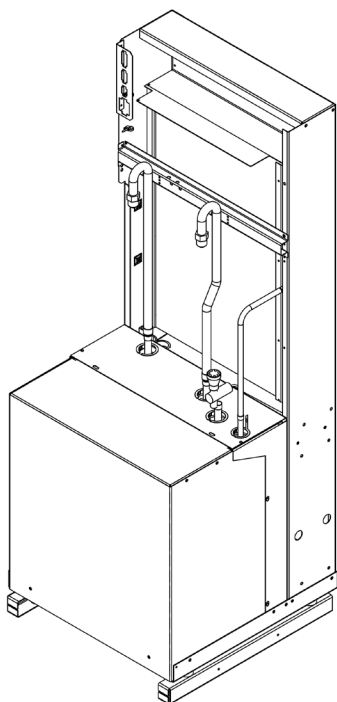


TOP VIEW




(A)  
LEFT SIDE VIEW

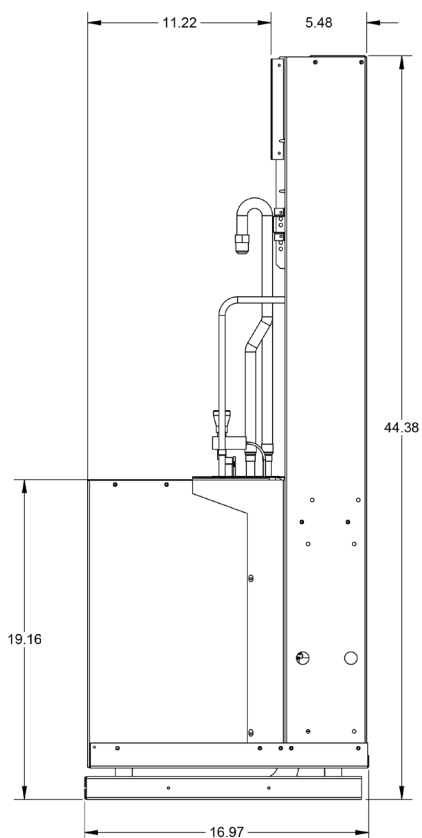



FRONT VIEW

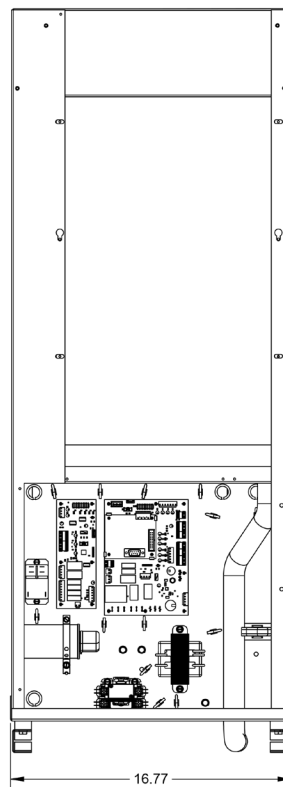


## Chassis - Sizes 024-030

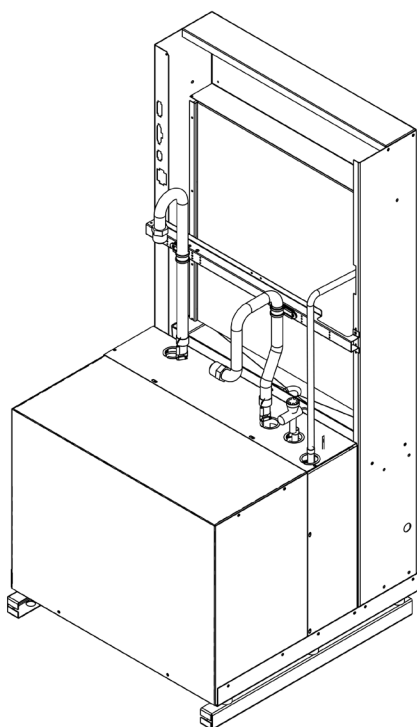

TOP VIEW

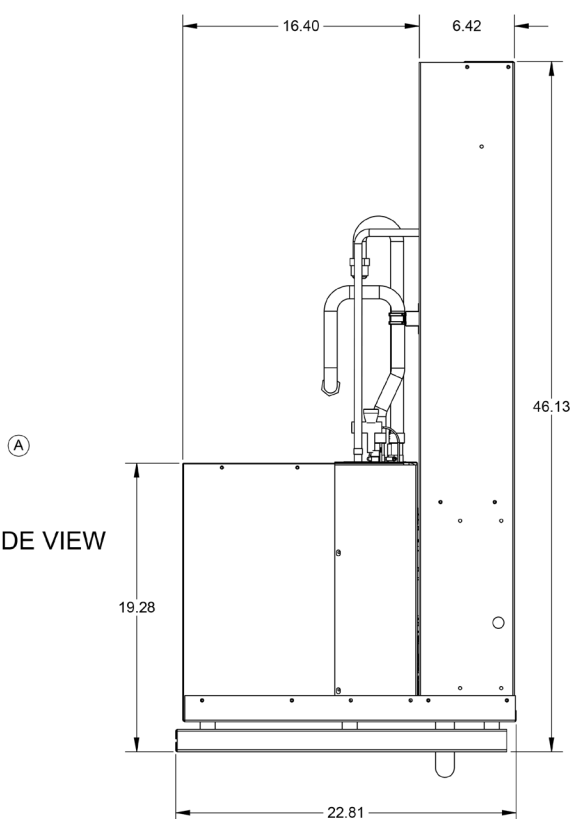


LEFT SIDE VIEW

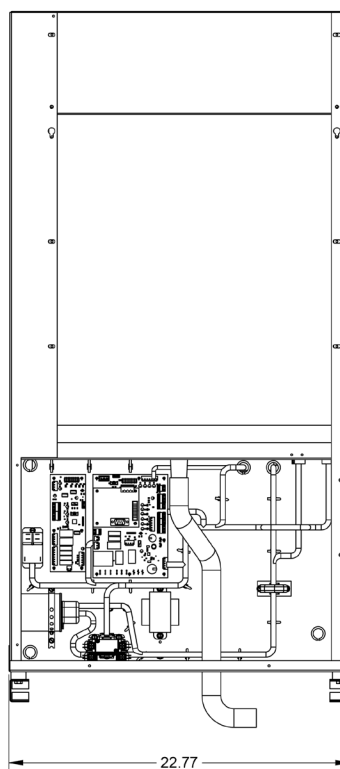


FRONT VIEW


## Chassis - Size 036

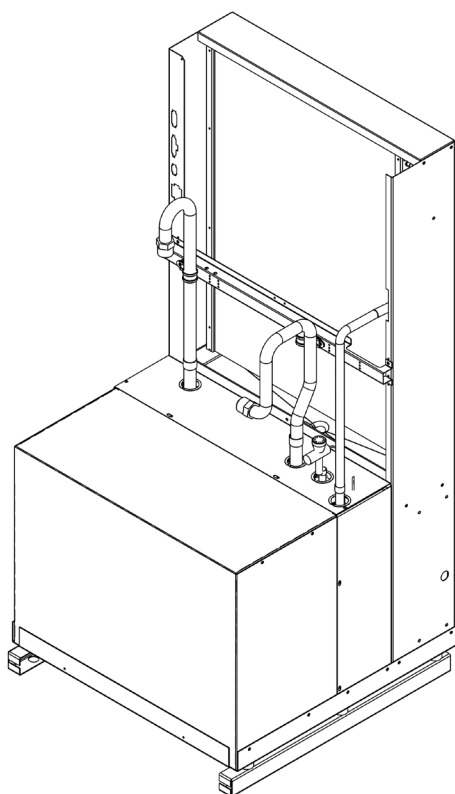


TOP VIEW



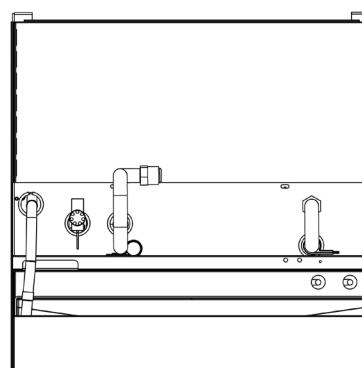


LEFT SIDE VIEW

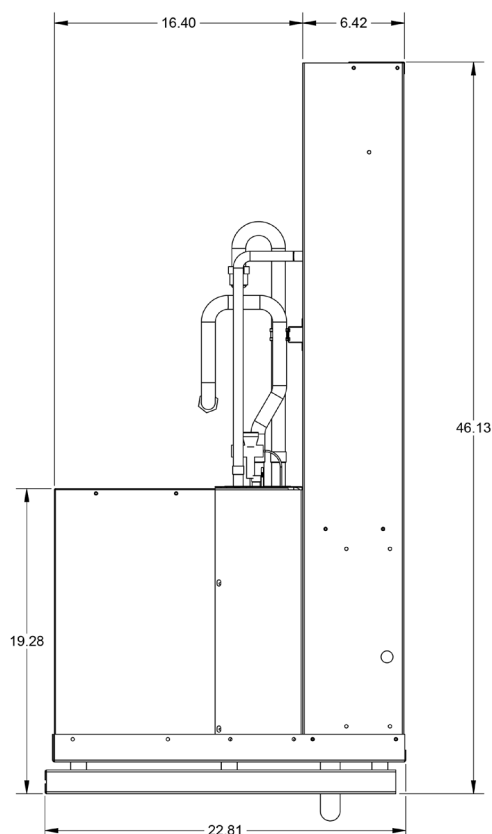

FRONT VIEW

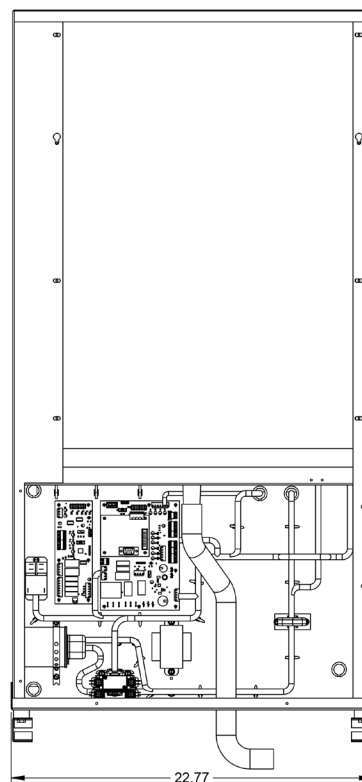

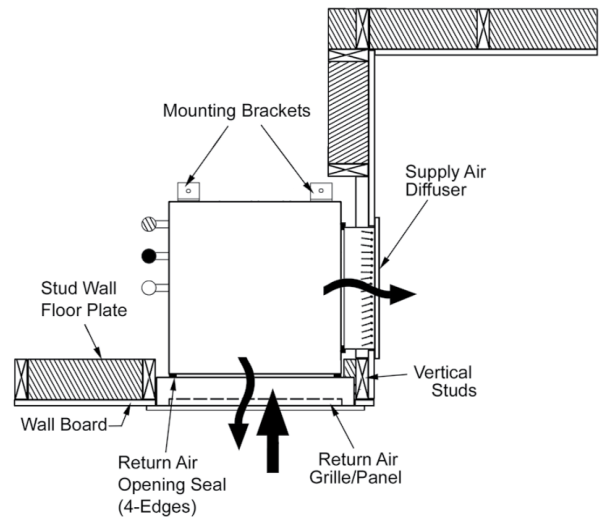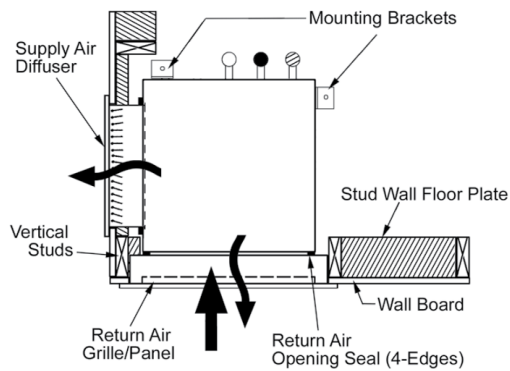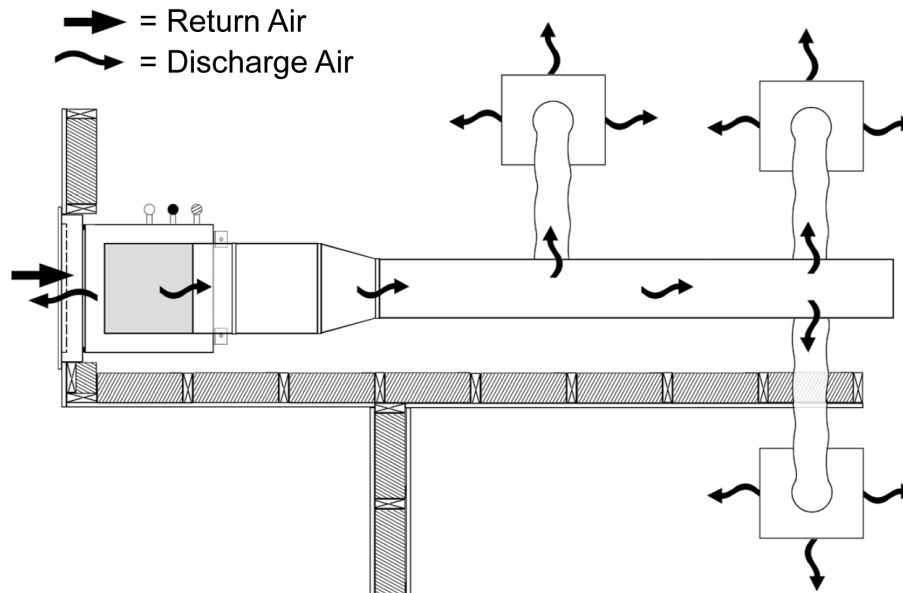**Figure 16: Typical Framing & Discharge Arrangements****Double Side Discharge****Typical Ducted Application****NOTICE**

Top air discharge units will require turning vanes and/or a volume damper for proper air flow and balancing, to minimize turbulence. These components must be field-installed and furnished in accordance with SMACNA guidelines.

**NOTICE**



All ducted applications require a unit that utilizes an EC motor.

# Dimensions

## Framing Locations and Dimensions

Location of framing around unit is critical for proper fit-up and will help reduce sound levels due to the transfer of vibration when properly installed.

**Figure 17: Framing Locations and Dimensions**

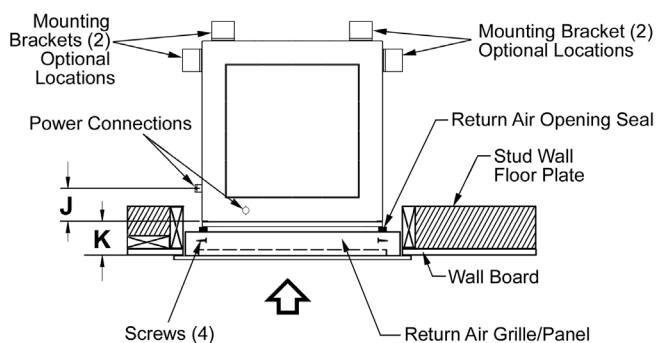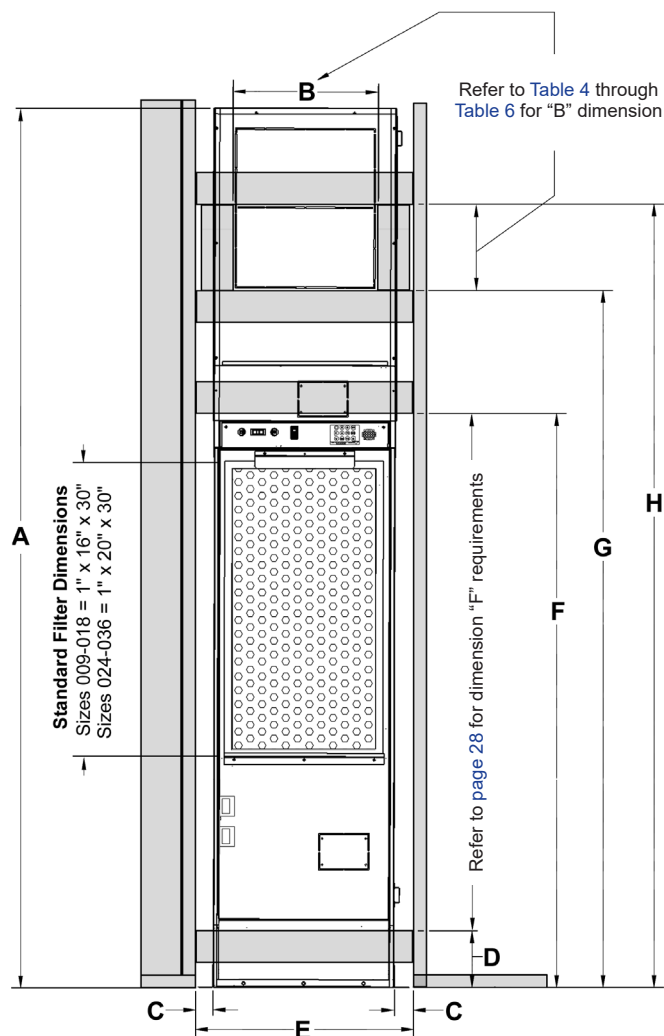

### NOTICE

If an optional subbase is used, add its height of either 2", 3", 4" or 5" to the vertical dimensions shown in Figure 17.

**Table 4: Letter Dimensions for Figure 17 (18" x 18" Unit)**

| Dimension        | Framing Locations                                  |        |        |        |
|------------------|----------------------------------------------------|--------|--------|--------|
|                  | 18" x 18" Unit - Sizes 009-012                     |        |        |        |
|                  | Unit Height "A"                                    |        |        |        |
|                  | 80"                                                | 88"    | 92"    | 96"    |
| B                | 14"                                                |        |        |        |
| C                | 2.07"                                              |        |        |        |
| D                | 5.75"                                              |        |        |        |
| E <sup>1</sup>   | 22.25"                                             |        |        |        |
| F                | 58.75"                                             |        |        |        |
| G <sup>2</sup>   | 60.75"                                             | 68.75" | 72.75" | 76.75" |
| H <sup>2</sup>   | 78.75"                                             | 86.75" | 90.75" | 94.75" |
| J                | 3.125"                                             |        |        |        |
| K <sup>3,4</sup> | 3.125" Min./Max. (See Note <sup>4</sup> exception) |        |        |        |

**Table 5: Letter Dimensions for Figure 17 (18" x 20" Unit)**

| Dimension        | Framing Locations                                  |        |        |        |
|------------------|----------------------------------------------------|--------|--------|--------|
|                  | 18" x 20" Unit - Sizes 015 & 018                   |        |        |        |
|                  | Unit Height "A"                                    |        |        |        |
|                  | 80"                                                | 88"    | 92"    | 96"    |
| B                | 14"                                                |        |        |        |
| C                | 2.07"                                              |        |        |        |
| D                | 5.75"                                              |        |        |        |
| E <sup>1</sup>   | 22.25"                                             |        |        |        |
| F                | 58.75"                                             |        |        |        |
| G <sup>2</sup>   | 60.75"                                             | 68.75" | 72.75" | 76.75" |
| H <sup>2</sup>   | 78.75"                                             | 86.75" | 90.75" | 94.75" |
| J                | 3.125"                                             |        |        |        |
| K <sup>3,4</sup> | 3.125" Min./Max. (See Note <sup>4</sup> exception) |        |        |        |

**Table 6: Letter Dimensions for Figure 17 (24" x 24" Unit)**

| Dimension         | Framing Locations                                  |        |        |        |
|-------------------|----------------------------------------------------|--------|--------|--------|
|                   | 24" x 24" Unit - Sizes 024-036                     |        |        |        |
|                   | Unit Height "A"                                    |        |        |        |
|                   | 80"                                                | 88"    | 92"    | 96"    |
| B                 | 18"                                                |        |        |        |
| C                 | 2.125"                                             |        |        |        |
| D                 | 5.75"                                              |        |        |        |
| E <sup>1</sup>    | 28.25"                                             |        |        |        |
| F                 | 58.75"                                             |        |        |        |
| G <sup>2</sup>    | 62.75"                                             | 70.75" | 74.75" | 78.75" |
| H <sup>2</sup>    | 78.75"                                             | 86.75" | 90.75" | 94.75" |
| J                 | 4.54"                                              |        |        |        |
| K <sup>3, 4</sup> | 3.125" Min./Max. (See Note <sup>4</sup> exception) |        |        |        |

**Notes:** <sup>1</sup> Dimension "E"  $\pm 0.125$

<sup>2</sup> Dimension "G" and "H" will vary based on cabinet height selected and choice of upper or lower discharge knockout. Refer to "Dimensions" on page 14 through page 16.

<sup>3</sup> Dimension "K" is critical, and that it be no more or no less than 3.125" from the finished wall surface to the front of the unit when using the hinged perimeter return air panel door or the louvered return air panel door. See Note <sup>4</sup> for the exception.


<sup>4</sup> Add 1" to dimension "K" when a 2", Merv 13 filter is used.

## Louvered Return Air Panel Door with Optional Motorized Outdoor Air Damper

- Based on the location of the hinges on the ordered louvered panel door, construct the framing to accommodate the ducting for connecting the motorized outdoor air damper. Also refer to "Return Air Panel Door(s) Dimensions" on page 28 for details.

### NOTICE

It is the responsibility of the installing contractor to install the ductwork that connects the outdoor air opening in the panel door frame to the source of the outdoor intake opening in the building. All ductwork should conform to industry standards of good practice as described in the ASHRAE Systems Guide. Also refer to good installation practices as outlined in ED 18529.

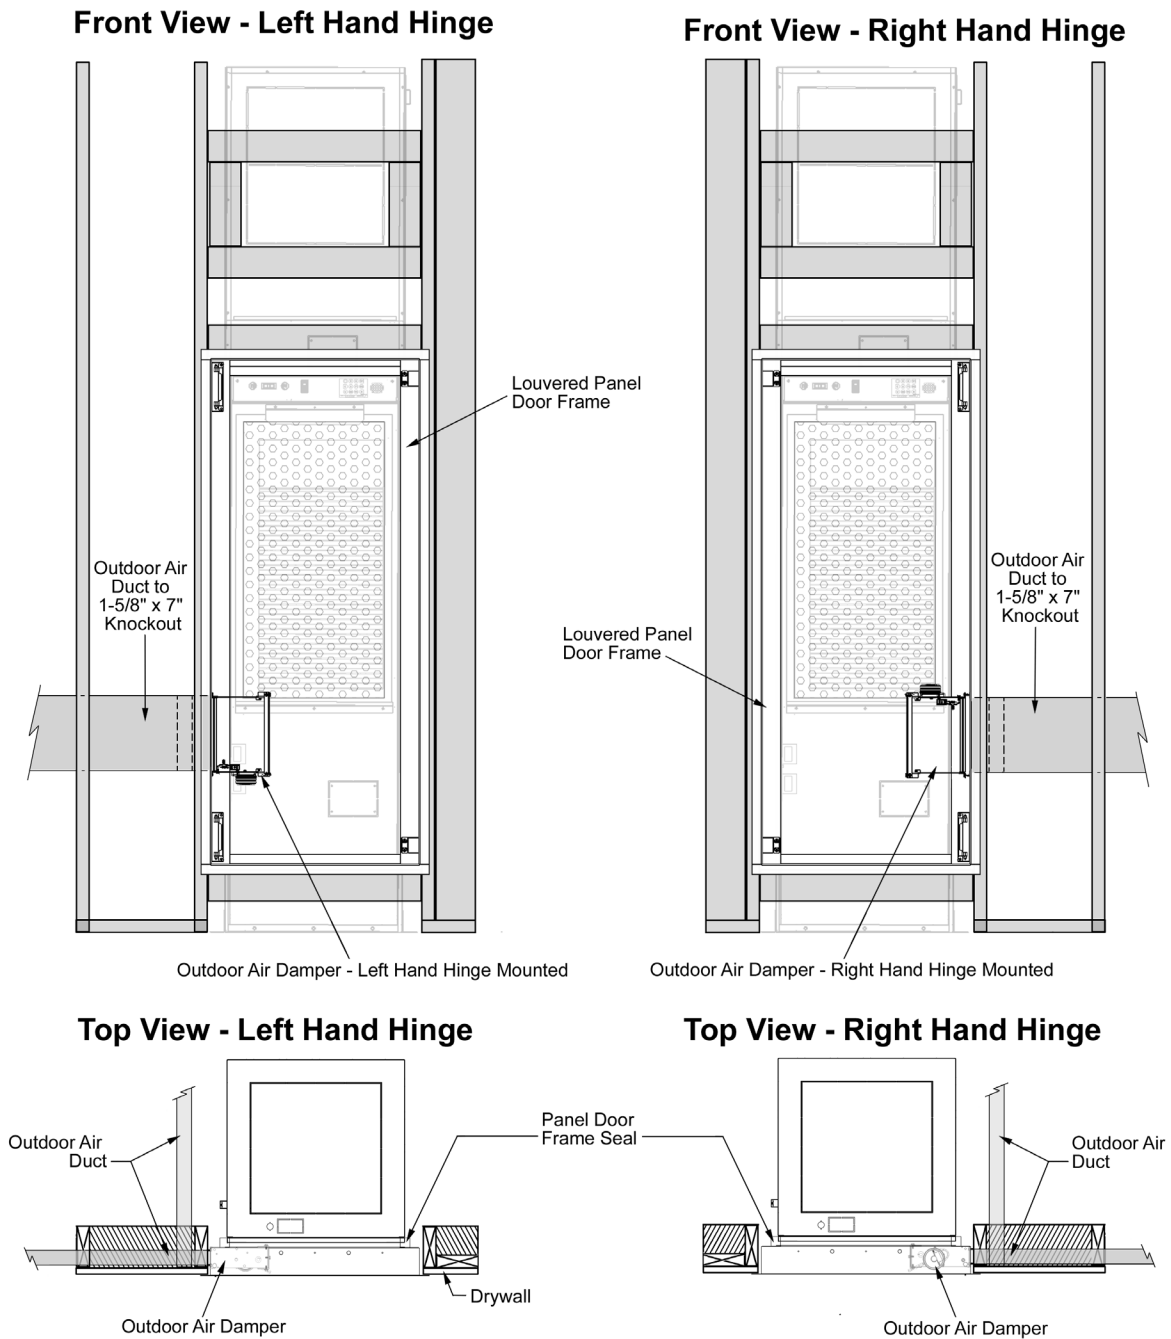
**Figure 18: Louvered Panel Door with Motorized Outdoor Air Damper****NOTICE**

The outdoor air duct can be located on either side of the cabinet and routed around the side- to the back of the cabinet, or run straight- parallel to the front of the cabinet.



## Vertical Riser Stub-Outs Locations to Unit Knockouts

**Figure 19: Riser Stub-Outs Knockouts Locations**

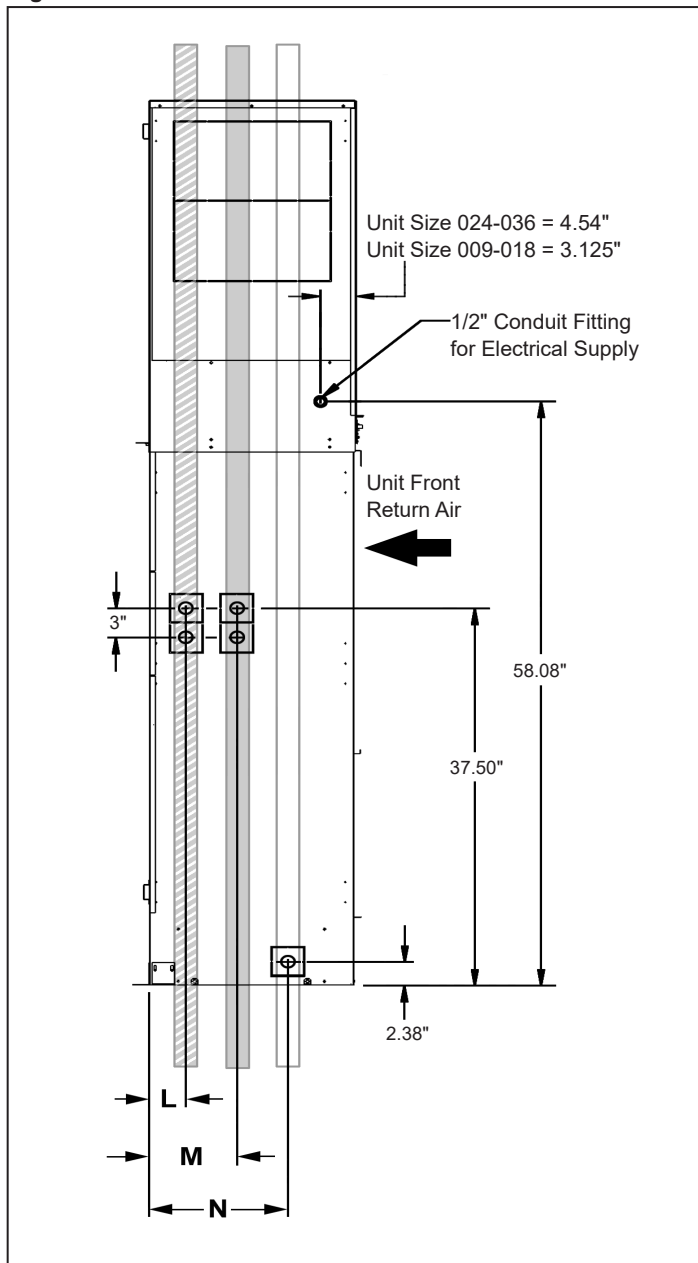

**Table 7: Letter Dimensions for Figure 19 (18" x 18" Unit)**

| Dimension | Riser Stub-Outs Locations      |     |     |     |     |
|-----------|--------------------------------|-----|-----|-----|-----|
|           | 18" x 18" Unit - Sizes 009-012 |     |     |     |     |
|           | Unit Height                    |     |     |     |     |
|           | 63.5"                          | 80" | 88" | 92" | 96" |
| L         | 3.3"                           |     |     |     |     |
| M         | 7.9"                           |     |     |     |     |
| N         | 12.4"                          |     |     |     |     |

**Table 8: Letter Dimensions for Figure 19 (18" x 20" Unit)**

| Dimension | Riser Stub-Outs Locations        |     |     |     |     |
|-----------|----------------------------------|-----|-----|-----|-----|
|           | 18" x 20" Unit - Sizes 015 & 018 |     |     |     |     |
|           | Unit Height                      |     |     |     |     |
|           | 63.5"                            | 80" | 88" | 92" | 96" |
| L         | 3.3"                             |     |     |     |     |
| M         | 7.9"                             |     |     |     |     |
| N         | 12.4"                            |     |     |     |     |


**Table 9: Letter Dimensions for Figure 19 (24" x 24" Unit)**

| Dimension | Riser Stub-Outs Locations      |     |     |     |     |
|-----------|--------------------------------|-----|-----|-----|-----|
|           | 24" x 24" Unit - Sizes 024-036 |     |     |     |     |
|           | Unit Height                    |     |     |     |     |
|           | 63.5"                          | 80" | 88" | 92" | 96" |
| L         | 3.13"                          |     |     |     |     |
| M         | 7.63"                          |     |     |     |     |
| N         | 12.13"                         |     |     |     |     |


## Return Air Panel Door(s) Dimensions

Location of studs in relation to the unit and the return air panel door are critical for proper installation and fit up. When installed, the return air grille gasket must compress and seal completely against the outer edge of the cabinet and around the inner front panel and filter bracket. Refer to "Installing the Return Air Panel Door" on page 39 and "Framing Locations and Dimensions" on page 24.

**Figure 20: Hinged Panel Door**

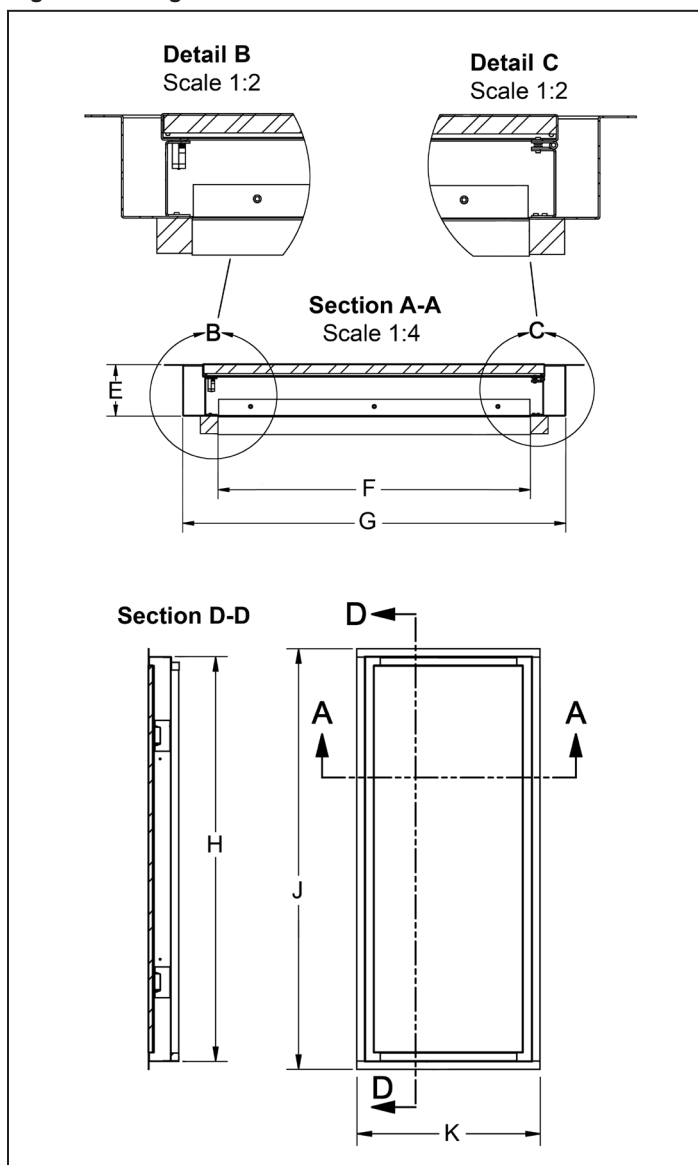

**Figure 21: Louvered Panel Door**

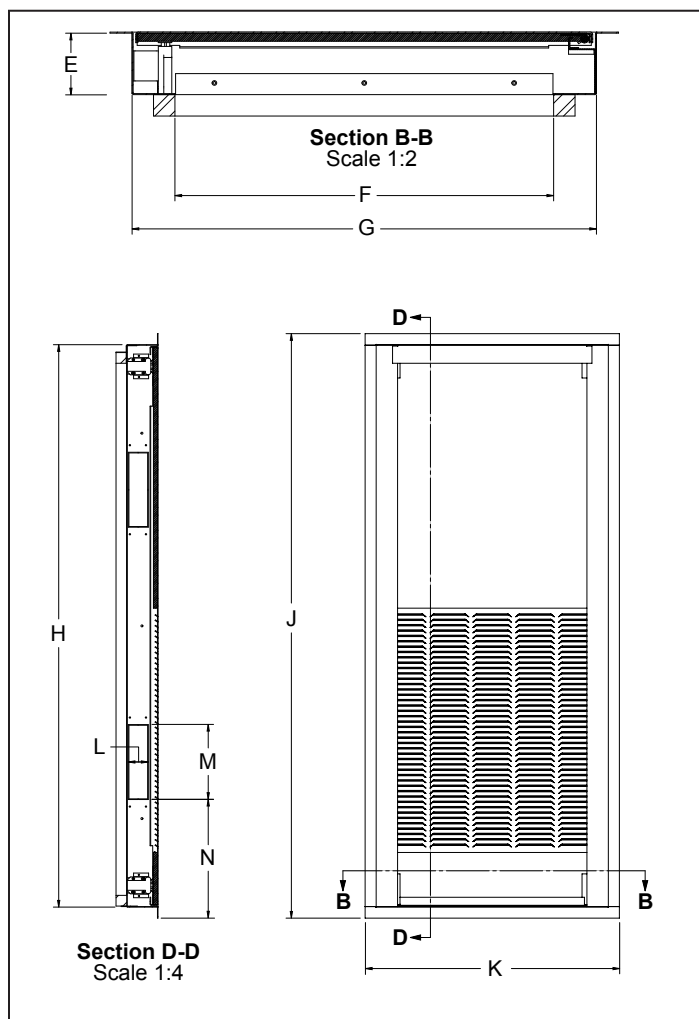

## Dimensions

| Unit Size | E                         |                           | F      | G      | H      | J      | K      | Outdoor Air Opening |       |        |
|-----------|---------------------------|---------------------------|--------|--------|--------|--------|--------|---------------------|-------|--------|
|           | 1" Filter Compatible Door | 2" Filter Compatible Door |        |        |        |        |        | L                   | M     | N      |
| 009-018   | 2.92"                     | 3.92"                     | 17.69" | 21.69" | 52.53" | 54.60" | 23.75" | 1.88"               | 7.00" | 11.08" |
| 024-036   |                           |                           | 23.69" | 27.69" |        |        | 29.75" |                     |       |        |

# System Applications

**Table 10: Water Quality Conditions and Applications for Units with a Coaxial Heat Exchanger**

| Potential Problem | Chemical(s) or Condition            | Range for Copper Heat Exchangers | Range for Cupronickel Heat Exchanger |
|-------------------|-------------------------------------|----------------------------------|--------------------------------------|
| Scaling           | Calcium & Magnesium Carbonate       | Less than 350 ppm                | Less than 350 ppm                    |
| Corrosion         | pH Range                            | 7 – 9                            | 5 – 9                                |
|                   | Total Dissolved Solids              | Less than 1000 ppm               | Less than 1500 ppm                   |
|                   | Ammonia, Ammonium Hydroxide         | Less than 0.5 ppm                | Less than 0.5 ppm                    |
|                   | Ammonium Chloride, Ammonium Nitrate | Less than 0.5 ppm                | Less than 0.5 ppm                    |
|                   | Calcium Chloride/ Sodium Chloride   | Less than 125 ppm                | Less than 125 ppm <sup>[4]</sup>     |
|                   | Chlorine                            | Less than 0.5 ppm                | Less than 0.5 ppm                    |
|                   | Hydrogen Sulfide                    | None Allowed                     | None Allowed                         |
| Biological Growth | Iron Bacteria                       | None Allowed                     | None Allowed                         |
|                   | Iron Oxide                          | Less than 1 ppm                  | Less than 1 ppm                      |
| Erosion           | Suspended Solids                    | Less than 10 ppm                 | Less than 10 ppm                     |
|                   | Water Velocity                      | Less than 8 ft/s                 | Less than 12 ft/s                    |

**NOTE 1:** Water hardness in ppm is equivalent to hardness in mg/L.

**NOTE 2:** Grains/gallon = ppm divided by 17.1.

**NOTE 3:** Copper and cupronickel heat exchangers are not recommended for pool applications for water outside the range of the table. Secondary heat exchangers are required for applications not meeting the requirements shown above.

**NOTE 4:** Salt water applications (approx. 25,000 ppm) require secondary heat exchangers due to copper piping between the heat exchanger and the unit fittings.

## Water System Quality

The cleaning, flushing and chemical treatment of a water source heat pump system is fundamental to efficient operation and the life expectancy of the system.

Potential system problems produced by the use of water fall into three general categories:

- Scale formation – Mineral deposits which result from the crystallization and precipitation of dissolved salts in the water. The deposits form an insulating barrier, reducing the heat transfer rate and impeding the circulation of fluids due to increased pressure drop.
- Corrosion – Decomposition of the metal caused by absorption of gases from the air. Corrosion may occur in any metal component of the system.
- Organic growths – Slime and algae which form under

certain environmental conditions, and can reduce the heat transfer rate by forming an insulating coating or can promote corrosion by pitting.

The system water should be evaluated for degrees of impurity, with testing available from independent testing labs, health departments or state agencies.

Table 10 is a list of water characteristics, the potential impurities and their results and the recommended treatment.

## Supply & Return Piping

All units should be connected to supply and return piping in a two-pipe reverse return configuration. A reverse return system is inherently self-balancing and requires only trim balancing where multiple quantities of units with different flow and pressure drop characteristics exist in the same loop.

- To insure proper water flow, measure the temperature differential between the supply and return connections. The temperature differential should be 10°F to 14°F (5°C to 8°C) for units in cooling mode.

A direct return system may also work acceptably, but proper water flow balancing is more difficult to achieve and maintain.

- The piping can be steel or copper.



### WARNING

Polyolester Oil, commonly known as POE oil is a synthetic oil used in many refrigeration systems, and may be present in this Daikin Applied product. POE oil, if ever in contact with PVC/CPVC will coat the inside wall of PVC/CPVC pipe causing environmental stress fractures. Although there is no PVC/CPVC piping in this product, please keep this in mind when selecting piping materials for your application, as system failure and property damage could result.

The supply and return stub outs and the factory-provided shutoff valves have male JIC connections and usually join the unit via short lengths of high pressure flexible hose which are sound attenuators for both unit operating noise and hydraulic pumping noise.

- Some flexible hose threaded fittings are supplied with sealant compound. If not, apply Teflon tape to assure a tight seal.


## Cleaning and Flushing Water System



### CAUTION

Prior to first operation of any unit, the water circulating system must be cleaned and flushed of all construction dirt and debris or damage will occur.

1. Prior to first operation of any unit, the water circulating system must be cleaned and flushed of all construction dirt and debris.
2. If the units are equipped with water shutoff valves, either electric or pressure operated, the supply and return runouts must be connected together at each unit location. This will prevent the introduction of dirt into the unit.

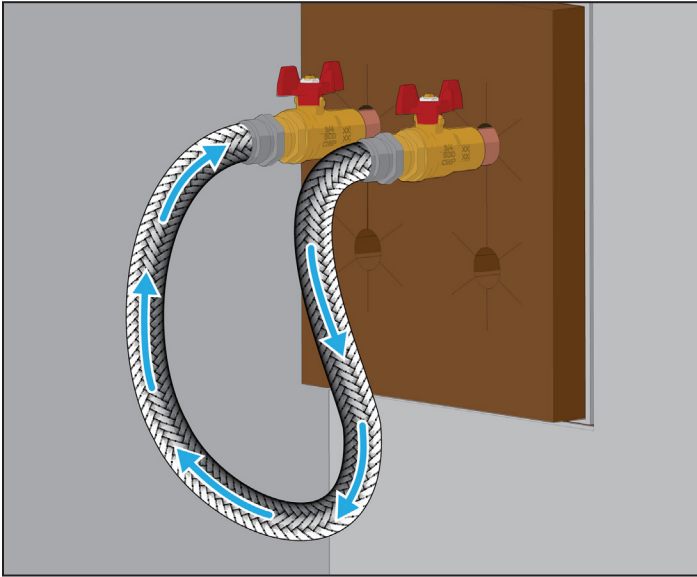**Figure 22: Connections for Flushing System Piping**

3. Fill the system at the city water makeup connection with all air vents open. After filling, close all air vents. The contractor should start main circulator with the pressure reducing valve open. Check vents in sequence to bleed off any trapped air, ensuring circulation through all components of the system. Power to the heat rejector unit should be off, and the supplementary heat control set at 80°F (27°C). While circulating water, the contractor should check and repair any leaks in the unit and surrounding piping. Drains at the lowest point(s) in the system should be opened for initial flush and blow-down, making sure city water fill valves are set to make up water at the same rate. Check the pressure gauge at pump suction and manually adjust the makeup to hold the same positive steady pressure both before and after opening the drain valves. Flush should continue for at least two hours or longer until the drain water is clean and clear.
4. Shut off supplemental heater and circulator pump and open all drains and vents to completely drain down the system. Short circuited supply and return runouts should now be connected to the unit supply and return connections. Do not use sealers at the swivel flare connections of hoses.
5. Flush system with water for 2 hours or longer until water is clean.
6. Refill the system with clean water. Test the water using litmus paper for acidity, and treat as required to leave the water slightly alkaline (pH 7.5 to 8.5). The specified percentage of antifreeze may also be added at this time. (See "Antifreeze Correction Factors" on page 31.) Use commercial grade antifreeze designed for HVAC systems only. Do not use automotive grade antifreeze. Once the system has been filled with clean water and antifreeze (if used), precautions should be taken to protect the system from dirty water conditions.

**NOTICE**

It is not Daikin Applied policy to make recommendations on water treatment. However, the general contractor or owner should contact a local water treatment company regarding water treatment. A fouled closed loop water system will lead to premature component failure.

**NOTICE**

Contact a local water treatment company to confirm water clarity prior to unit operation. Dirty water will result in system wide degradation of performance and solids may clog system-wide valves, strainers, flow regulators, etc. Additionally, the heat exchanger may become clogged which reduces compressor service life or causes premature failure.

7. Set the loop water controller heat add setpoint to 70°F (21°C) and the heat rejection setpoint to 85°F (29°C). Supply power to all motors and start the circulating pumps. After full flow has been established through all components including the heat rejector (regardless of season) and the vented air and loop temperatures have been stabilized, each of the units will be ready for check, test and start-up, air balancing, and water balancing.

## Operating Limits

### Environment

**This equipment is designed for indoor installation only.**

Sheltered locations such as attics, garages, etc., will not provide sufficient protection against extremes in temperature and/or humidity, and equipment performance, reliability, and service life may be adversely affected.

**NOTICE**

Altitude Limits: Maximum applied altitude not to exceed 9,843 ft (3,000 m).

### Initial Unit Start-Up Temperature Range

**NOTICE**

This is not for continuous operation. It is assumed that such a start-up is for the purpose of bringing the building space up to occupancy temperature.

### Standard range units

Units are designed to start in an ambient of 50°F (10°C), with entering air at 50°F (10°C), with entering water at 70°F (21°C), with both air and water at the flow rates used in the ISO 13256-1 rating test, for initial start-up in winter.

### Extended range units

Extended range heat pump conditioners are designed to start in an ambient of 40°F (4°C), with entering air at 40°F (4°C), with entering water at 40°F (4°C), with both air and water at the flow rates used in the ISO 13256-1 rating test, for initial start-up in winter.

**Table 11: Air Limits in °F (°C)**

| Air Limits                              | Standard Range Units   |             | Extended Range (Geothermal) Units |             |
|-----------------------------------------|------------------------|-------------|-----------------------------------|-------------|
|                                         | Cooling (DB/WB)        | Heating     | Cooling (DB/WB)                   | Heating     |
| <b>Minimum Ambient Air<sup>1</sup></b>  | 50°F (10°C)            | 50°F (10°C) | 40°F (4°C)                        | 40°F (4°C)  |
| <b>Maximum Ambient Air<sup>2</sup></b>  | 100°F/77°F (38°C/25°C) | 85°F (29°C) | 100°F/77°F (38°C/25°C)            | 85°F (29°C) |
| <b>Minimum Entering Air<sup>1</sup></b> | 65°F/55°F (18°C/13°C)  | 50°F (10°C) | 65°F/55°F (18°C/13°C)             | 50°F (10°C) |
| <b>Common Design Entering Air</b>       | 75°F/63°F (24°C/17°C)  | 70°F (21°C) | 75°F/63°F (24°C/17°C)             | 70°F (21°C) |
| <b>Maximum Entering Air<sup>2</sup></b> | 85°F/71°F (29°C/22°C)  | 80°F (27°C) | 85°F/71°F (29°C/22°C)             | 80°F (27°C) |

<sup>1</sup> Maximum and minimum values may not be combined. If one value is at maximum or minimum, the other conditions may not exceed the normal condition for standard units. Extended range units may combine any two maximum conditions, but not more than two, with all other conditions being normal conditions.

<sup>2</sup> This is not for continuous operation. It is assumed that such a start-up is for the purpose of bringing the building space up to occupancy temperature.

**Table 12: Fluid Limits**

| Fluid Limits                        | Standard Range Units |             | Extended Range (Geothermal) Units |                    |
|-------------------------------------|----------------------|-------------|-----------------------------------|--------------------|
|                                     | Cooling              | Heating     | Cooling                           | Heating            |
| <b>Minimum Entering Fluid</b>       | 55°F (13°C)          | 55°F (13°C) | 30°F (-1°C)                       | 25°F (-4°C)        |
| <b>Common Design Entering Fluid</b> | 85-90°F (29-32°C)    | 70°F (21°C) | 90°F (32°C)                       | 35-60°F (1.5-16°C) |
| <b>Maximum Entering Fluid</b>       | 120°F (49°C)         | 90°F (32°C) | 120°F (49°C)                      | 90°F (32°C)        |
| <b>Minimum GPM/Ton</b>              | 1.5                  |             |                                   |                    |
| <b>Nominal GPM/Ton</b>              | 3.0                  |             |                                   |                    |
| <b>Maximum GPM/Ton</b>              | 4.0                  |             |                                   |                    |

## Antifreeze



### CAUTION

Do not use an automotive-grade antifreeze. Industrial grade glycols must be used. Automotive antifreeze contains inhibitors which will cause plating on the copper components used with the unit. The type and handling of glycol used must be consistent with local codes.

Glycols and other alcohols are commonly used as antifreeze; however higher percentage mixtures of alcohols such as ethanol and methanol are not recommended due to increased flammability. Your local sales office should be consulted to determine the antifreeze best suited to your area. The use of antifreeze may impact system performance depending on its concentration and should be considered during initial system design. When antifreeze is added to the water system for freeze protection, recognize that the refrigerant suction pressure will be lower, capacity will be less, and water side pressure drop will be higher. The reduction in performance depends upon the antifreeze concentration and temperature.

In areas where minimum entering loop temperatures drop below 50°F (10°C) or where piping will be routed through areas subject

to freezing, antifreeze is required. If 3 GPM/ton is maintained, this limit can be lowered to 42°F (6°C). Care must be given to maintain proper water flow.

Freeze protection should be maintained to 15°F (9°C) below the lowest expected entering loop temperature. For example, if 30°F (-1°C) is the minimum expected entering loop temperature, the leaving loop temperature would be 22 to 25°F (-6 to -4°C) and freeze protection should be at 15°F (-10°C). Calculation is as follows: 30°F - 15°F = 15°F (-1°C - 9°C = -10°C).

All alcohols should be premixed and pumped from a reservoir outside of the building when possible or introduced under the water level to prevent fumes. Calculate the total volume of fluid in the piping system. Then use the percentage by volume shown in Table 13 for the amount of antifreeze needed. Antifreeze concentration should be checked from a well mixed sample using a hydrometer to measure specific gravity.

**Table 13: Antifreeze Percentage by Volume**

| Type                       | Minimum Temperature for Low Temperature Protection |               |               |               |
|----------------------------|----------------------------------------------------|---------------|---------------|---------------|
|                            | 10°F (-12.2°C)                                     | 15°F (-9.4°C) | 20°F (-6.7°C) | 25°F (-3.9°C) |
| <b>Propylene Glycol</b>    | 38%                                                | 25%           | 22%           | 15%           |
| <b>Ethanol<sup>1</sup></b> | 29%                                                | 25%           | 20%           | 14%           |
| <b>Methanol</b>            | 25%                                                | 21%           | 16%           | 10%           |

<sup>1</sup> Must not be denatured with any petroleum product.

**Table 14: Antifreeze Correction Factors**

| Ethylene Glycol         |       |       |       |       |       |
|-------------------------|-------|-------|-------|-------|-------|
|                         | 10%   | 20%   | 30%   | 40%   | 50%   |
| <b>Cooling Capacity</b> | 0.995 | 0.992 | 0.987 | 0.983 | 0.979 |
| <b>Heating Capacity</b> | 0.991 | 0.982 | 0.977 | 0.969 | 0.961 |
| <b>Pressure Drop</b>    | 1.07  | 1.13  | 1.18  | 1.26  | 1.28  |
| Propylene Glycol        |       |       |       |       |       |
|                         | 10%   | 20%   | 30%   | 40%   | 50%   |
| <b>Cooling Capacity</b> | 0.99  | 0.98  | 0.97  | 0.96  | 0.95  |
| <b>Heating Capacity</b> | 0.987 | 0.975 | 0.962 | 0.942 | 0.93  |
| <b>Pressure Drop</b>    | 1.07  | 1.15  | 1.25  | 1.37  | 1.42  |
| Ethanol                 |       |       |       |       |       |
|                         | 10%   | 20%   | 30%   | 40%   | 50%   |
| <b>Cooling Capacity</b> | 0.991 | 0.951 | —     | —     | —     |
| <b>Heating Capacity</b> | 0.995 | 0.96  | —     | —     | —     |
| <b>Pressure Drop</b>    | 1.035 | 0.96  | —     | —     | —     |
| Methanol                |       |       |       |       |       |
|                         | 10%   | 20%   | 30%   | 40%   | 50%   |
| <b>Cooling Capacity</b> | 0.998 | 0.972 | —     | —     | —     |
| <b>Heating Capacity</b> | 0.995 | 0.97  | —     | —     | —     |
| <b>Pressure Drop</b>    | 1.023 | 1.057 | —     | —     | —     |

**NOTE:** Higher percentage mixtures of ethanol and methanol are not recommended due to increased flammability.



# Installation

This equipment is designed for indoor installation only. Sheltered locations such as attics, garages, etc., will not provide sufficient protection against extremes in temperature and/or humidity, and equipment performance, reliability, and service life may be adversely affected.

## CAUTION

Units must be checked for water leaks upon initial water system start-up. Water leaks may be a result of mishandling or damage during shipping. Failure by the installing contractor to check for leaks upon start-up of the water system could result in property damage.

## CAUTION

Installation and maintenance is to be performed only by qualified personnel who are familiar with, and in compliance with state, local and national codes and regulations, and experienced with this type of equipment. Sharp edges and coil surfaces are potential injury hazards. Avoid contact with them.

## NOTICE

If the chassis was packaged and shipped inside the unit cabinet, refer to "Removing Chassis from Cabinet when Shipped Together" on page 10 before beginning unit installation.

## Risers and Cabinet

1. Position the cabinet and risers within the building pipe chase and align with the unit on the floor above and/or below (Figure 23).

## NOTICE

The cabinet must be centered between the wall studs and plumb vertically for the grille/panel frame and diffuser to properly align and seal to the cabinet. Use of a 4' level is recommended.

## NOTICE

Refer to Figure 25 to determine the correct recess depth from the front of the unit to the drywall face. When the installation is complete, the return air grille/panel frame must meet to seal with the cabinet discharge opening and the discharge air diffuser duct must meet and seal with the discharge opening.

2. Using the riser extensions, make preliminary riser connections between the units above and or below to assure proper riser alignment (supply, return and condensate). Figure 23.
3. After all components are aligned properly, anchor the unit cabinet to the floor using the Daikin Applied provided mounting brackets, as illustrated in Figure 24.
4. Locate the two mounting brackets in the parts bag and position them near the back corners of the unit, or one on a side and one on the back, whichever location or combination is most suitable. See Figure 24 and Figure 25. Contractor is responsible for the appropriate fasteners to secure the brackets to the floor, as local codes dictate.

Figure 23: Position the Cabinet and Risers



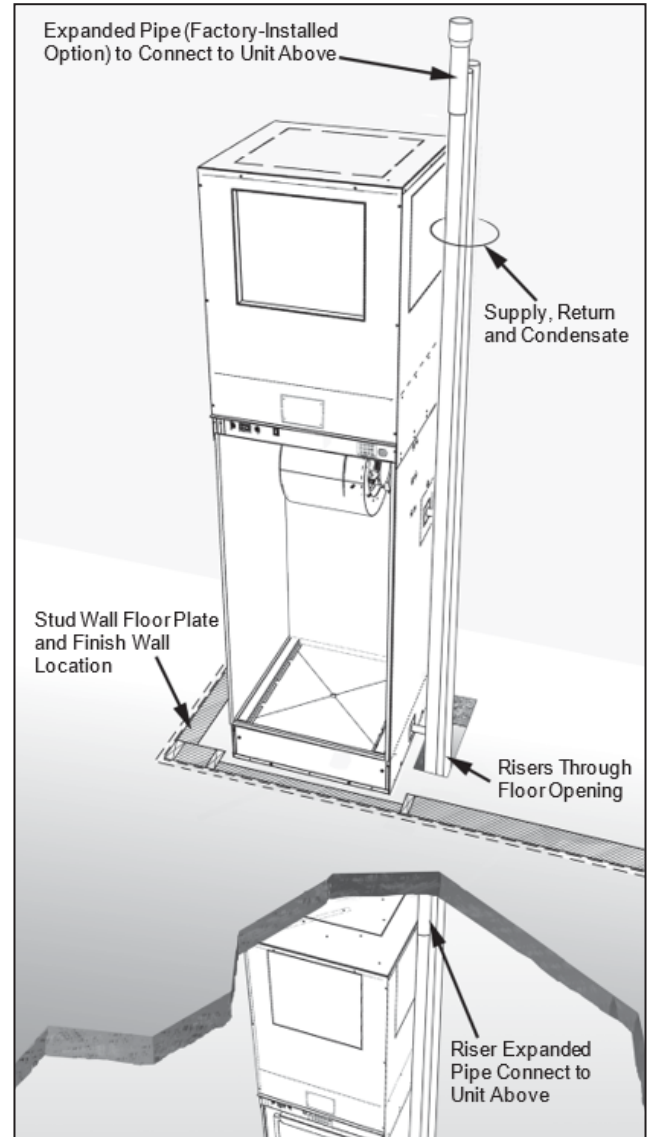


Figure 24: Provided Mounting Brackets

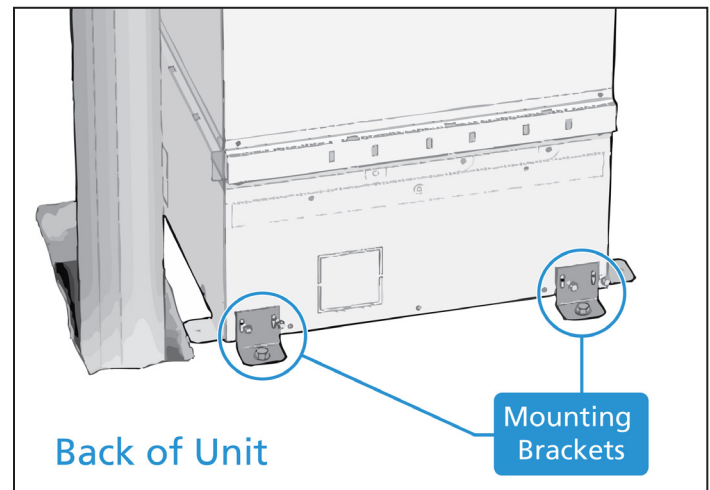

**Figure 25: Critical Dimension - Cabinet Edge**

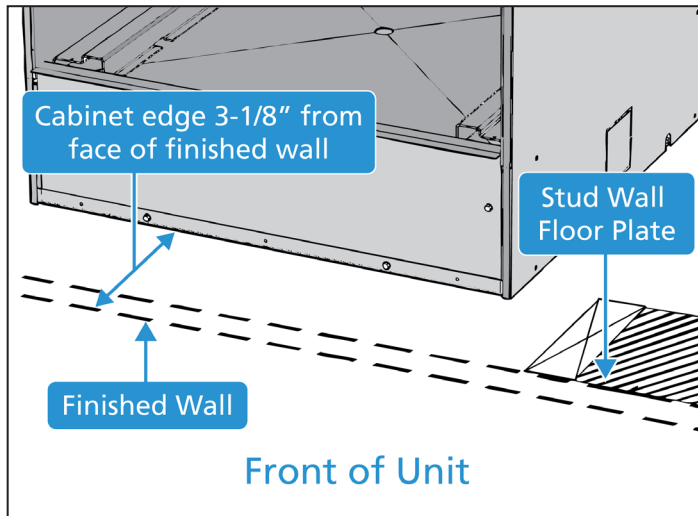


**NOTICE**

Add 1" to dimension when a 2", Merv 13 filter is used.

**NOTICE**

Apply the provided seal to the interior of the cabinet around the stub-outs. Be sure there are no voids between the stub-outs and the stub-out seal which helps prevent air infiltration into the cabinet.

**Figure 26: Riser Knockouts - Cabinet Exterior**

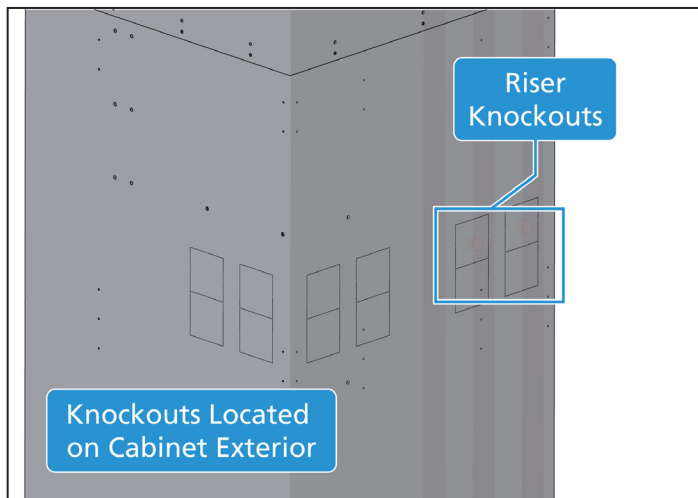


**CAUTION**

The unit is not designed to support the weight of the risers. Anchor them securely to the building structure.

- Center the riser stub-outs within the knockouts and apply provided seal to the cabinet interior, as shown in [Figure 27](#).

**Figure 27: Stub-Out Seal (Field Installed)**

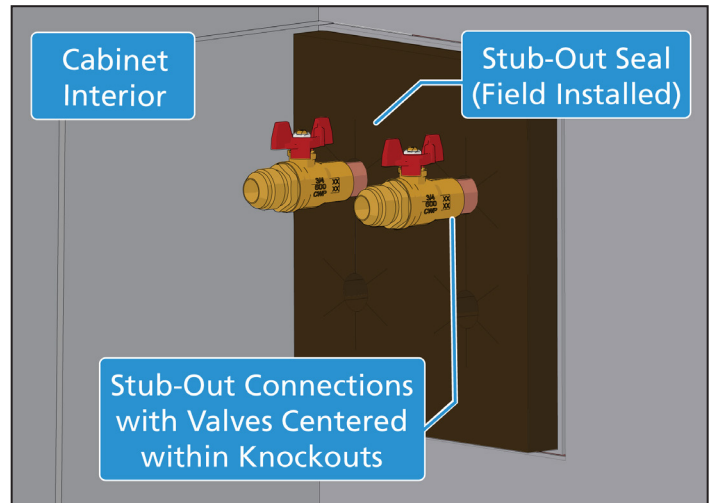

- Anchor risers to the building structure to prevent vertical riser movement greater than, plus or minus one inch to allow for riser expansion or contraction.
- Solder all supply and return riser connections to units above and/or below.
- Remove riser ties used to secure the risers to the cabinet during shipping.



**WARNING**

Before furring-in units, conduct hydrostatic testing of the risers and unit connection joints in accordance with local building codes to make sure they are leak-proof.

**NOTICE**

Perform "Cleaning and Flushing Water System" on [page 29](#).



**CAUTION**

When furring-in units, make sure that no screws or nails penetrate the unit cabinet.

- Layout the stud wall floor plates and frame-in unit. See [Figure 16](#) on [page 23](#) and [Figure 17](#) on [page 24](#).

**NOTICE**

Before cutting and hanging drywall, remove the appropriate discharge air opening knockout (see [Table 15](#)). Protect unit from construction debris with a protective cover.

**Table 15: Discharge Knockout Openings**

| Unit Size | Discharge Openings |     |        |     |        |     |                    |     |
|-----------|--------------------|-----|--------|-----|--------|-----|--------------------|-----|
|           | Single             |     | Double |     | Triple |     | Single-Top Opening |     |
|           | W                  | H   | W      | H   | W      | H   | W                  | H   |
| 009-012   | 14"                | 16" | 14"    | 8"  | NR     | NR  | 12"                | 12" |
| 015-018   | 14"                | 16" | 14"    | 8"  | 14"    | 8"  | 12"                | 12" |
| 024-036   | NR                 | NR  | 18"    | 14" | 18"    | 10" | 18"                | 18" |

NR = Not Recommended




## Power Wiring from Building to Unit

### DANGER


To avoid electrical shock, personal injury, or death, disconnect power supply before installation to prevent electrical shock and damage to equipment.

1. Locate the electrical power supply wiring from the building and feed wiring through a field-provided 1/2" conduit fitting (strain relief), on the unit as shown in [Figure 28](#) & [Figure 29](#), following local electrical codes and regulations.

**Figure 28: Supply Electric Wiring from Building to Unit**

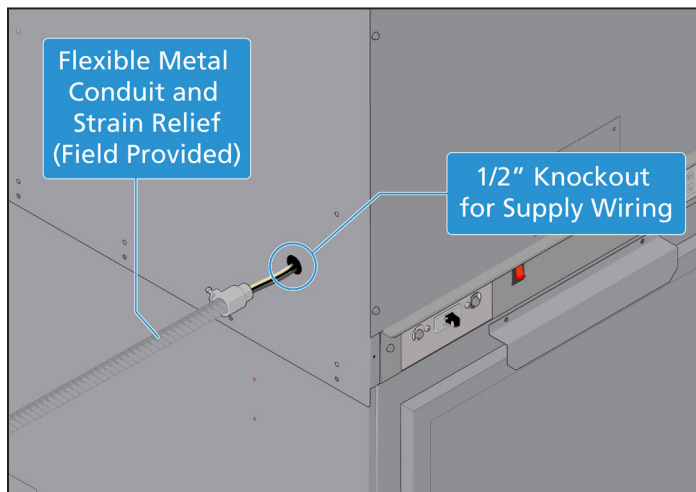


**Figure 29: Wire to Unit Switch**

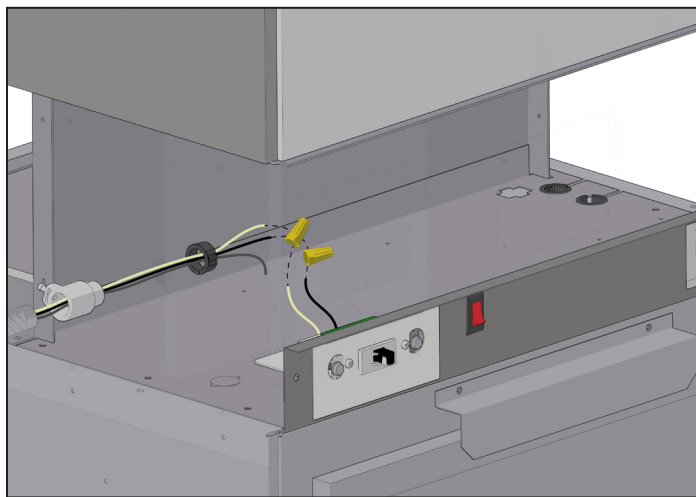


## Electrical Entry Through Top

**Figure 30: Power Wiring Through Top Entry**

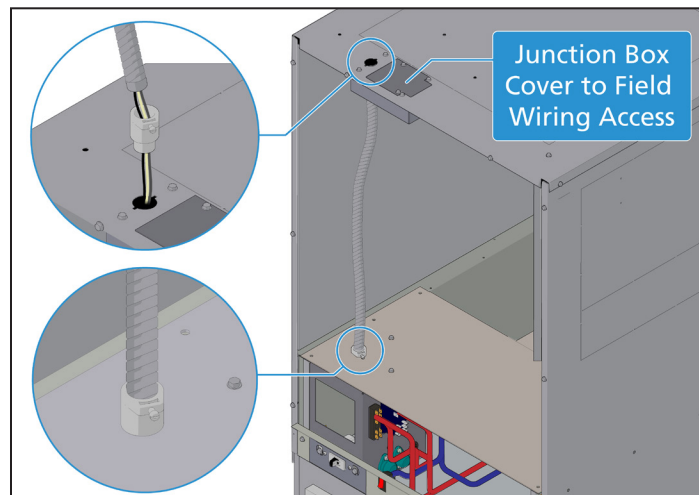

2. If a remote wall-mounted thermostat is being used, install it referring to the installation manual that came with the thermostat. Route the wires and male moxex plug to the unit mounted moxex receptacle located on the face plate of the unit. Secure the wires in compliance with local codes. Plug in the 12-pin moxex plug noting the position of the locating rib as a reference. See [Table 16](#) on page 35.

**Figure 31: Plug 12-Pin Moxex with Wire Whips into the Moxex Receptacle**

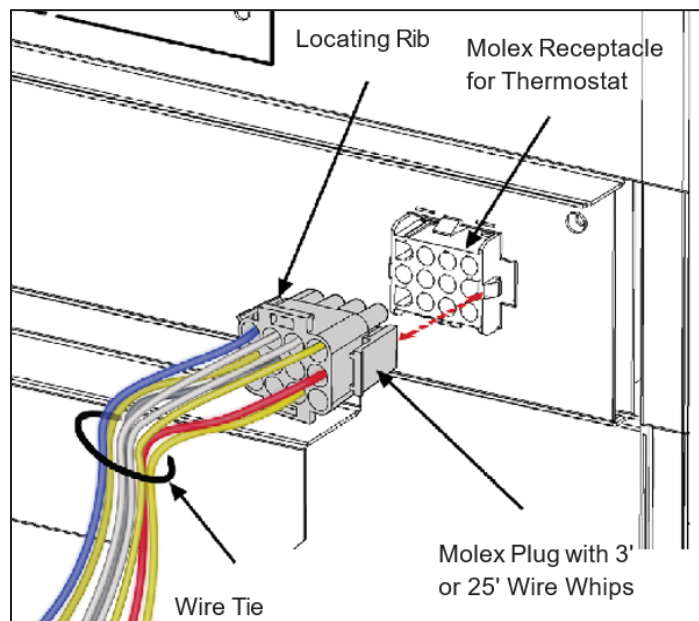

### NOTICE

Before enclosing the unit with drywall, install the 3.25" deep diffuser extension frame to the unit discharge air opening. See "Installing The 3.25" Deep (2-Piece) Discharge Air Diffuser" on page 40. Note that the louvered discharge air diffuser will slide into and connect to the extension frame and secured after the unit has been framed-in and the discharge opening is cut out of drywall.

**Table 16: Thermostat Molex Plug**


| Molex Plug |          | Thermostat        |
|------------|----------|-------------------|
| Wire Color | Wire No. | Termination Point |
| BLU        | 1        | R                 |
| WHT        | 2        | W2                |
| WHT        | 3        | W1                |
| YEL        | 4        | Y2                |
| YEL        | 5        | Y1                |
| GRY        | 6        | G                 |
| RED        | 8        | A                 |
| YEL        | 11       | C                 |

**Table 17: Room Sensor Molex Plug for Use on Units with BACnet Communications**

| Molex Plug |          | MicroTech         |
|------------|----------|-------------------|
| Wire Color | Wire No. | Termination Point |
| BLU        | 1        | LED               |
| WHT        | 2        | FM                |
| WHT        | 3        | SP                |
| YEL        | 4        | RM                |
| YEL        | 5        | GND               |
| GRY        | 6        | MS/TP+            |
| YEL        | 7        | MS/TP-            |
| RED        | 8        | MS/TP REF         |
| PNK        | 9        | E                 |
| BRO        | 10       | U                 |

## Typical Connections for Thermostats & Temperature Sensors Applications


**Figure 32: Wiring Example of Typical Heat/Cool Thermostat Connect**  
**Wiring Example of Typical Heat/Cool Thermostat Connections**

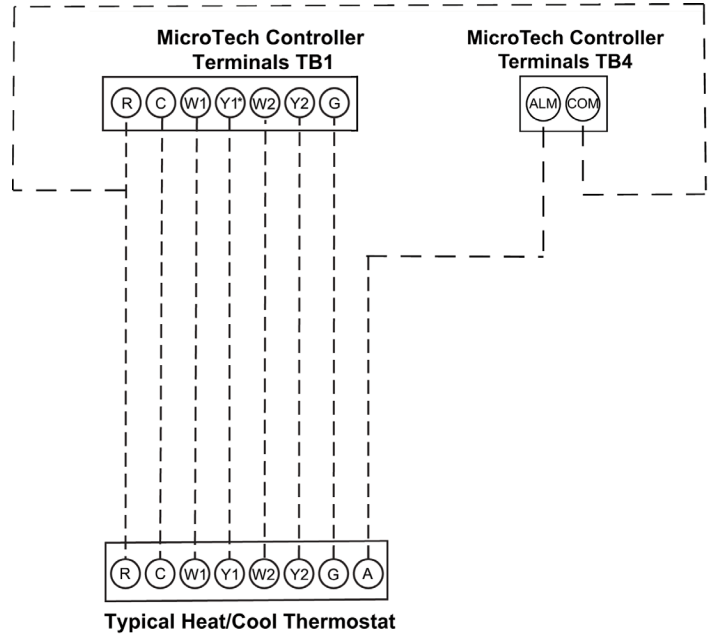


**NOTE:** \*For single stage operation, wire Y1 from thermostat to Y2 terminal on the MicroTech control board.

## Sensors Used With Vertical Stack Units – Building Automated System (BAS) Operation – Wiring


**Figure 33: Basic Sensor – P/N 669529001**

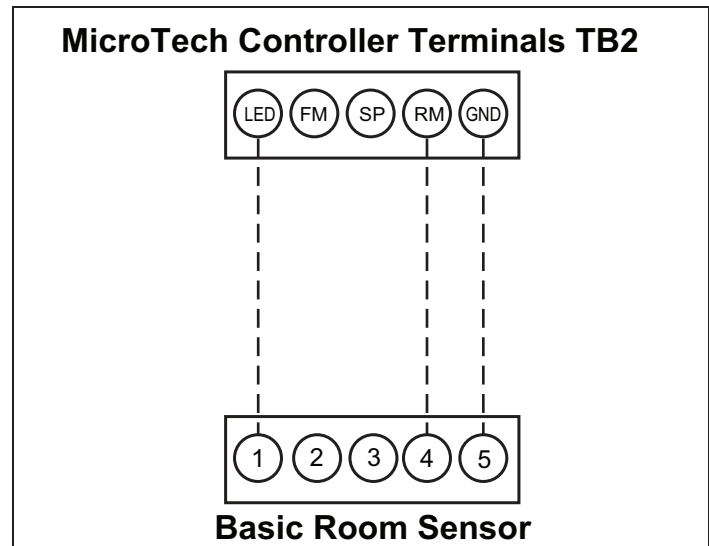

**Figure 34: Example Wiring of SmartSource MicroTech Board to Basic Temperature Sensor Wiring**

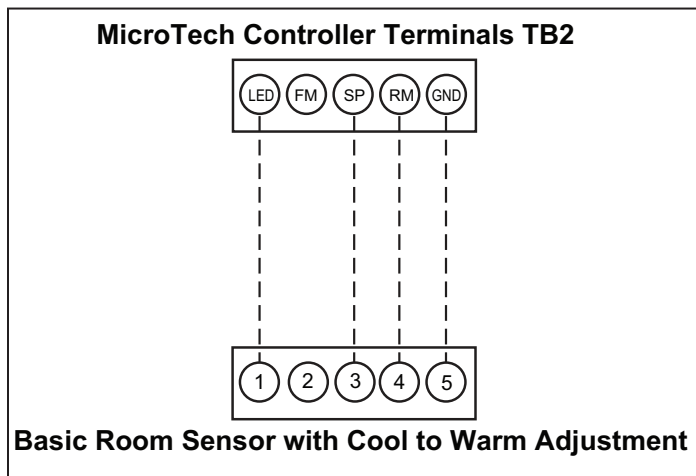

**Figure 35: Room Sensor with Temperature Adjustment Wiring**

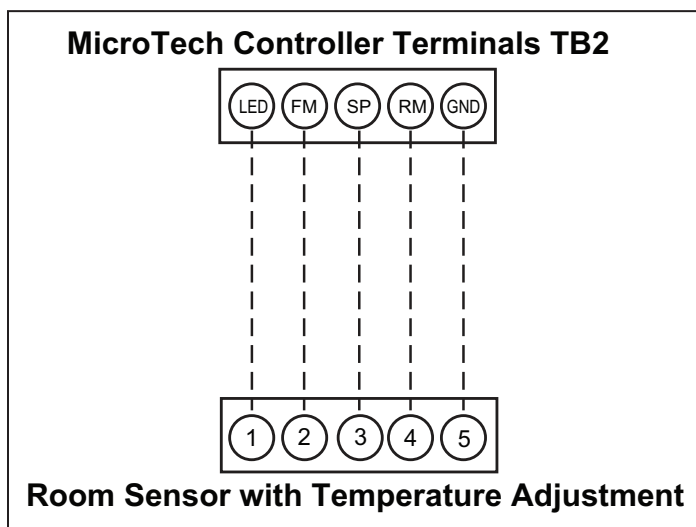

## Drain Hose Connections

To connect the condensate drain hose to the field-supplied or factory-provided (shipped loose) drain stub-out, do the following:

### NOTICE

For shipped loose or field supplied risers by others, the condensate hose connection is dependent on riser location and must be field adjusted. For a drain riser located at the back of the unit the factory provided drain hose can be connected (as is) to the drain stub out. Right or left hand drain hose connections will require the drain tube be cut at the indicated cut line on the drain tube, (units sizes 009 - 018 only).

1. Remove the two screws located along the back edge of the drain pan, holding it in place (Figure 36).
2. Cut the drain tube to the appropriate length for a right or left hand drain connection (units sizes 009 - 018 only). If

connecting the drain tube to the drain stub-out at the back of the unit, cutting the drain tube may not be necessary.

3. Connect the condensate drain hose to the drain stub-out. Using the provided clamp, secure the hose by tightening the clamp.




### CAUTION

Be sure that there are no kinks, bends or restrictions in the drain tube, but that it is straight with a slight down-pitch between the J-trap and clamp.


4. Reinstall the secondary drain pan with the two screws removed in step 1.

**Figure 36: Drain Pan Screw Removal**

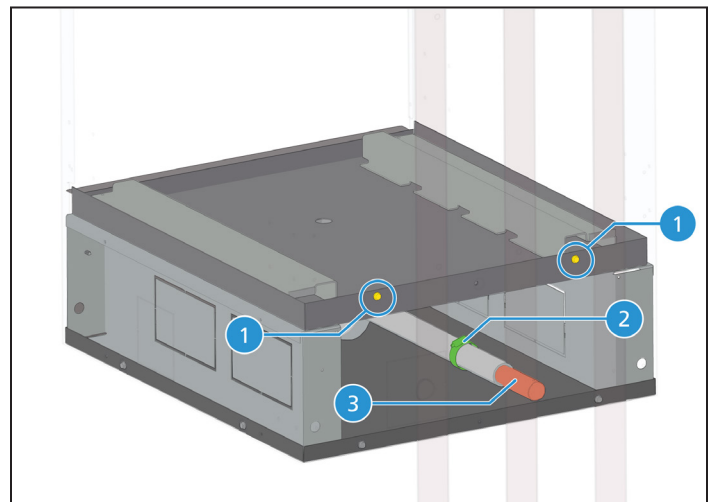

| No | Component        |
|----|------------------|
| 1  | Drain Pan Screws |
| 2  | Clamp            |
| 3  | Drain Stub-Out   |

**Figure 37: Drain Tube Cut Location**

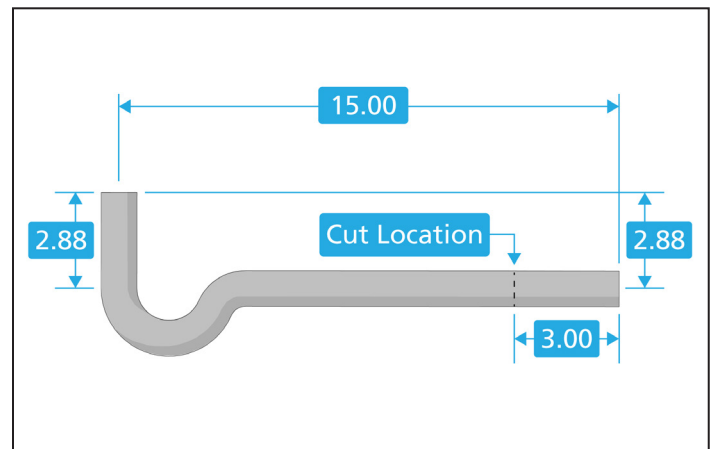

## Water Connections

All piping connections should be made using good plumbing practices and in accordance with any and all local codes that may apply.

### Unit Piping Connection


Unit sizes 009 through 018 coil connections are gooseneck style, made of copper tubing with 1/2" male JIC. Unit sizes 024 through 036 have 3/4" male JIC connections.

### Shutoff/Balancing Valve

Each heat pump requires a flexible hose with a shutoff valve on both the supply and return stubouts for easy serviceability and removal of the chassis when necessary.

Daikin Applied recommends a factory installed 2-way motorized isolation valve on the return line of the chassis and an Auto Flow Regulator (AFR) installed on the supply line which allows proper water flow in a given size unit. Each valve package has 1/2" JIC or 3/4" JIC threaded connections.

**Figure 38: Typical Motorized Valve Piping**

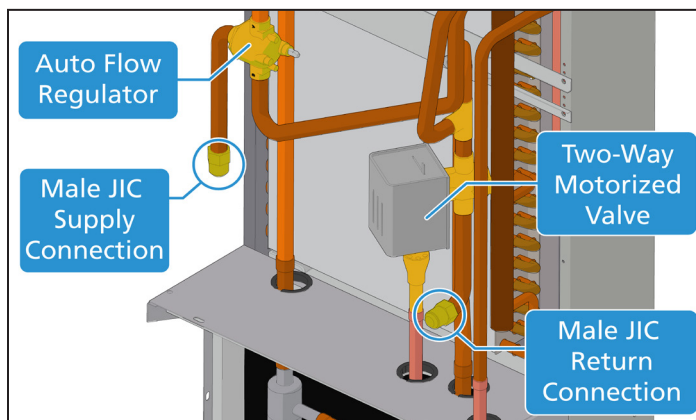


### Motorized Valve & Auto Flow Regulator

The vertical stack water source heat pump chassis can be configured with a 2-way or 3-way motorized valve. The motorized valve is mounted on the return line of each unit and the Auto Flow Regulator (AFR) is mounted to the supply line.

#### **Flexible Hose Connections to the Supply and Return Valves from Riser Stub-Outs**

1. Using the specified supply and return hoses, make supply and return hose connections to the riser stub-outs valve connections.
2. Attach one end of the JIC swivel hose end to the male JIC connection on the supply and return stub out valves. Using two crescent wrenches, one to hold the valve and the second on the hose end, tighten the connections.


**Figure 39: Supply and Return Hose Connections**

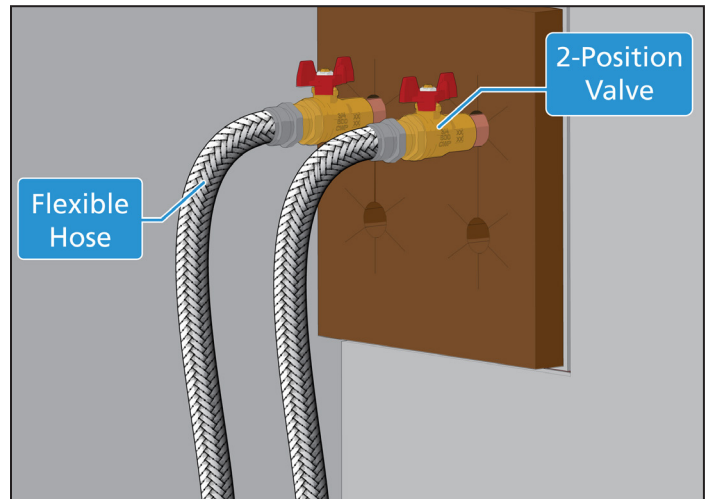

#### **NOTICE**

To complete the flexible hose connections to the chassis, only partially install the chassis into the cabinet as shown in Figure 42.

**Figure 40: Hose Kits (Sizes 009-018)**

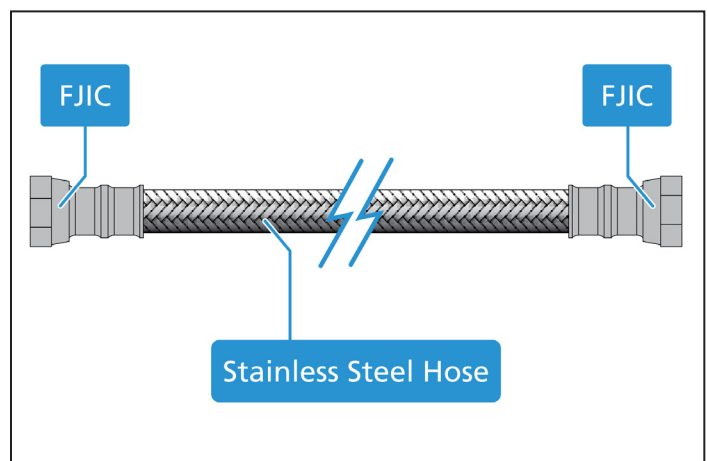

### Chassis Handling Guidelines

#### **NOTICE**

If using a hand truck to move chassis, tip the chassis forward or back only, pivoting on the ends of the chassis rails. Tipping and pivoting the chassis side-to-side on the long edge of the rails will damage the rails and the rubber vibration isolators.




#### **CAUTION**

To avoid personal injury, protective gloves should be used while moving and lifting the unit chassis.

When handling and moving the chassis, tip front to back only, pivoting on the ends of the rails as shown in Figure 41. Do not tip the chassis from side to side on the long edge of the rail or damage will occur.


**Figure 41: Tipping the Chassis**

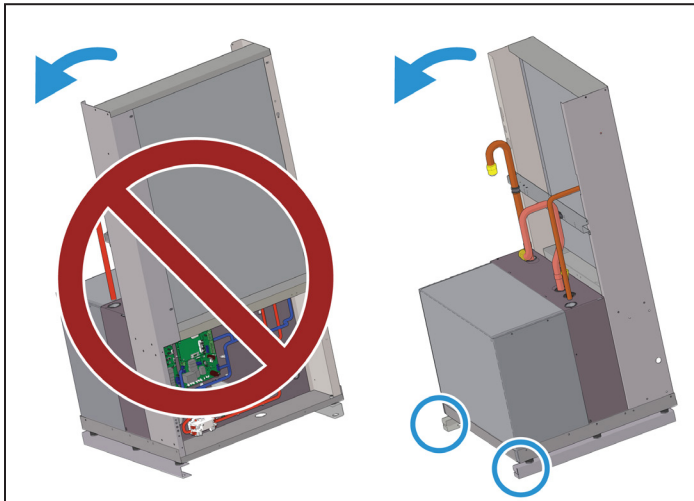

## Installing Unit Chassis


1. Install the chassis by sliding it into the cabinet opening until the chassis support rails sit on the cabinet rails. Slide the chassis into the cabinet until there is approximately a 10" space between the chassis coil and the cabinet. This will allow adequate clearance to connect the flexible hoses to the chassis coil. For safety, place a 6" high block under the chassis rails to support the chassis as shown in Figure 42.

**Figure 42: Slide Chassis Partially into the Unit Cabinet**

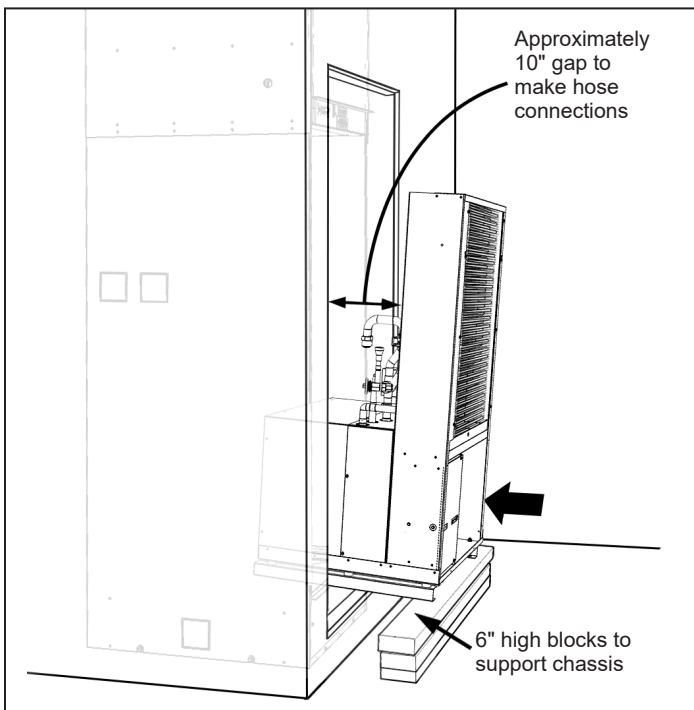

2. Thread the female swivel ends of the hoses on to the water supply and return connections. Using two crescent wrenches, one to hold the chassis pipe fitting connection and the second on the flexible hose swivel, tighten the connections. See Figure 43.

**Figure 43: Leave 10" Gap for Clearance To Make Flexible Hose Connections**

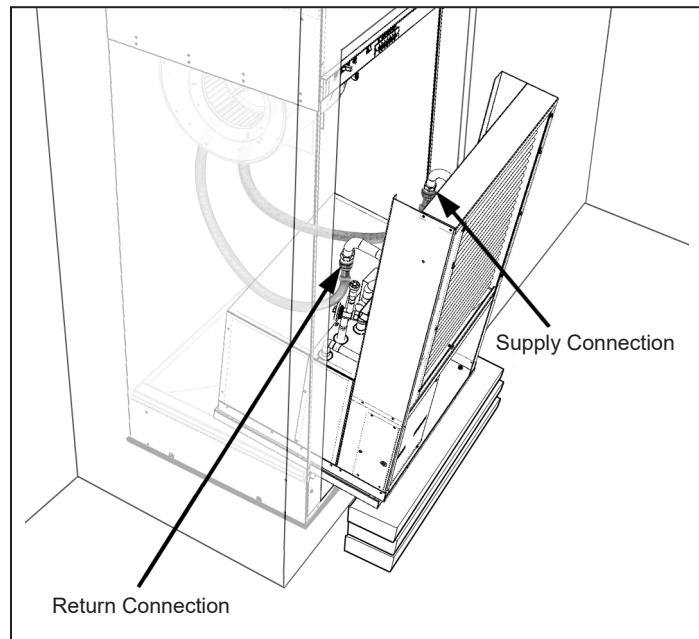

## Making Cabinet to Chassis Wiring Connections

### **⚠ DANGER**

To avoid electrical shock, personal injury, or death, disconnect power supply before installation to prevent electrical shock and damage to equipment.


1. Locate the wires and plugs in the upper fan section of the unit that connect to the unit chassis.
2. Plug in the wires from the top cabinet section into the proper molex receptacle on the chassis. See Figure 44.
3. Push the chassis into the cabinet until it makes contact with the stops on the rails at the rear of the cabinet.

### **NOTICE**

Be sure there are no kinks and that the stainless steel braided hoses do not come in contact with and vibrate on chassis and cause noise. Also be sure not to pinch wires between cabinet and chassis when inserting chassis.



**Figure 44: Plug Unit Component Wiring from the Top Cabinet Section into the Proper Receptacle on the Chassis**

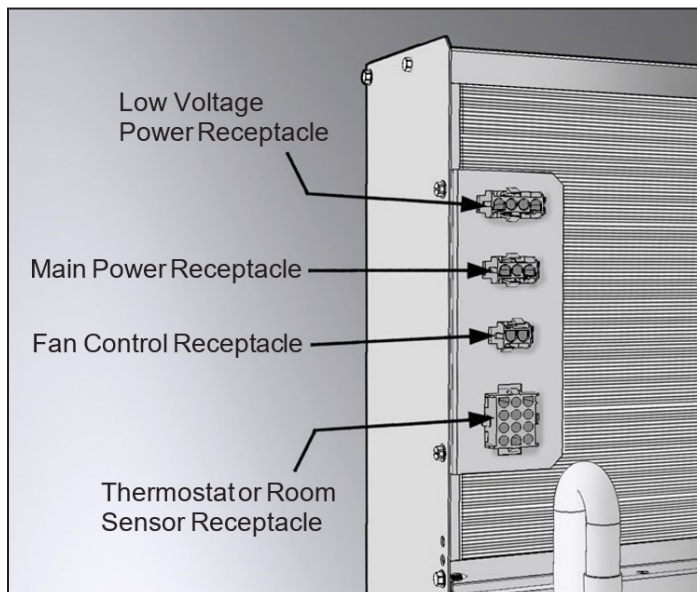

**NOTE:** Unit size 015 chassis shown.

## Installing the Return Air Panel Door

1. Install the return air panel door assembly (Figure 45). Center, level and plumb the frame inside the framed opening. Push the assembly into the opening until the gaskets compress against the cabinet, and the frame face is tight to the finished wall.

### NOTICE

Shims (field-supplied) should be used to make up the space between the studs and the panel frame at the locations of the fasteners on the panel frame. Adhere them to the panel frame to keep them in place (Figure 45).

### NOTICE

Be sure the bottom flange of the door frame slides beneath the cabinet flange, as shown in Figure 45. This seal must compress between the bottom panel flange and the bottom cabinet flange when the installation of the panel door frame is complete.

2. Check that the panel door frame is centered within the opening and seals completely to the cabinet return air opening. Also confirm that the room side flange of the frame is level, plumb and firmly against the drywall. Secure the hinged panel door frame with the appropriate fasteners/screws (field provided).

### NOTICE


Before proceeding to step 3, be sure to clean frame with rubbing alcohol to remove any oils or dust to ensure a strong bond between Velcro® and door frame.

3. Remove the backing on the (hook) Velcro® strips and firmly press the cover plate to the panel door frame in the location shown in Figure 45.

### NOTICE

The clearance holes along the top edge of the cover plate should fit around the screws on the underside of the top door frame.

**Figure 45: Installing the Return Air Panel Door (Hinged Perimeter Panel Door Shown)**

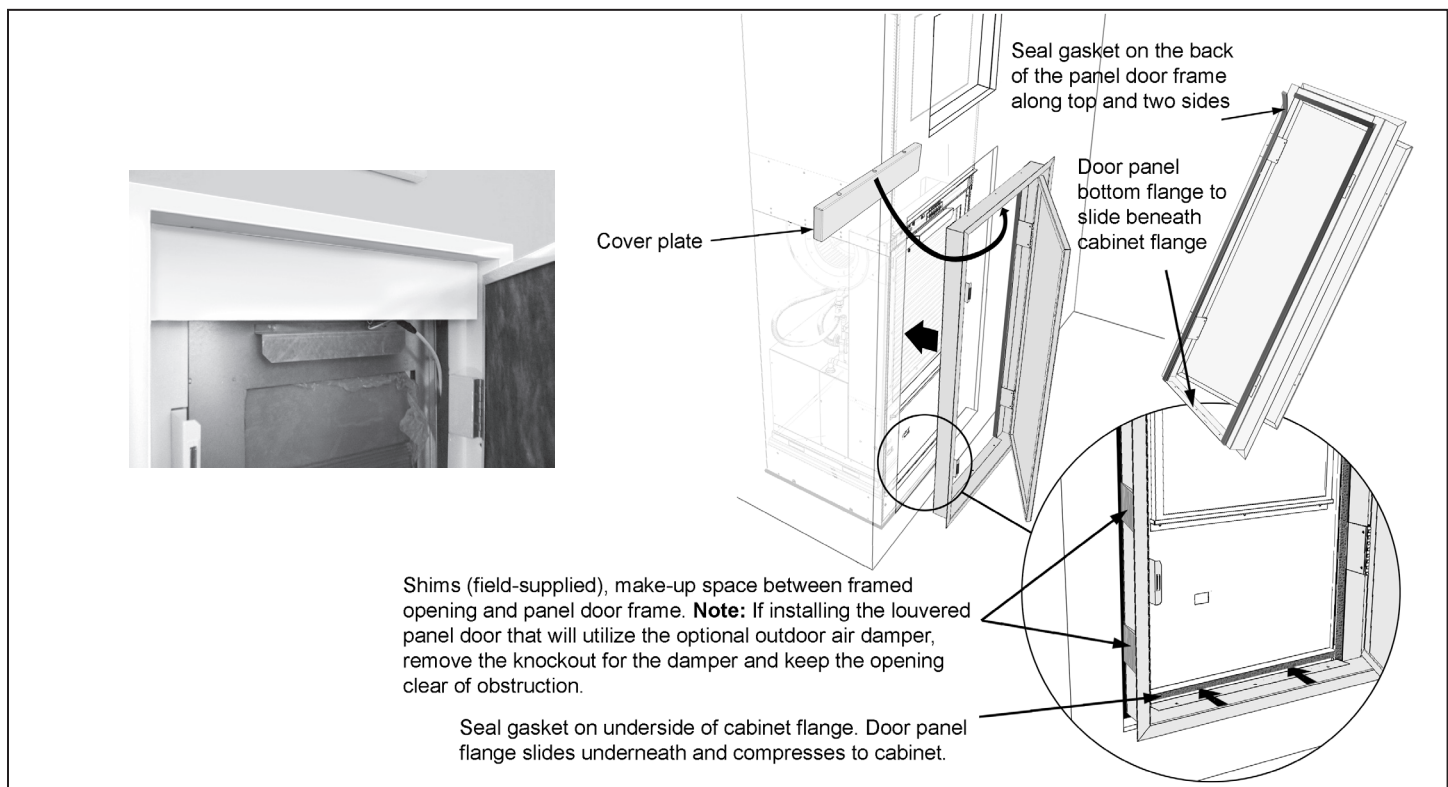


## Installing the Optional Motorized Outdoor Air Damper with Louver Panel Door Only

1. Install the return air panel door assembly.
2. Fasten the damper assembly to the door frame with the provided screws. On left hand hinged doors the damper assembly will mount on the hinge side with the motor located at the bottom, and with right hand hinged doors the damper assembly will mount on the right side with the motor in the top position.
3. Wire the damper assembly motor using the correct schematic based on the unit motor type and voltage, (Figure 55 through Figure 60).

### NOTICE

It is the responsibility of the installing contractor to install the ductwork that connects the outdoor air opening in the panel door frame to the source of the outdoor intake opening in the building. All ductwork should conform to industry standards of good practice as described in the ASHRAE Systems Guide. Also refer to good installation practices as outlined in ED 18529.

**Figure 46: Fasten the Outside Air Damper Assembly to the Louver Panel Door Frame**

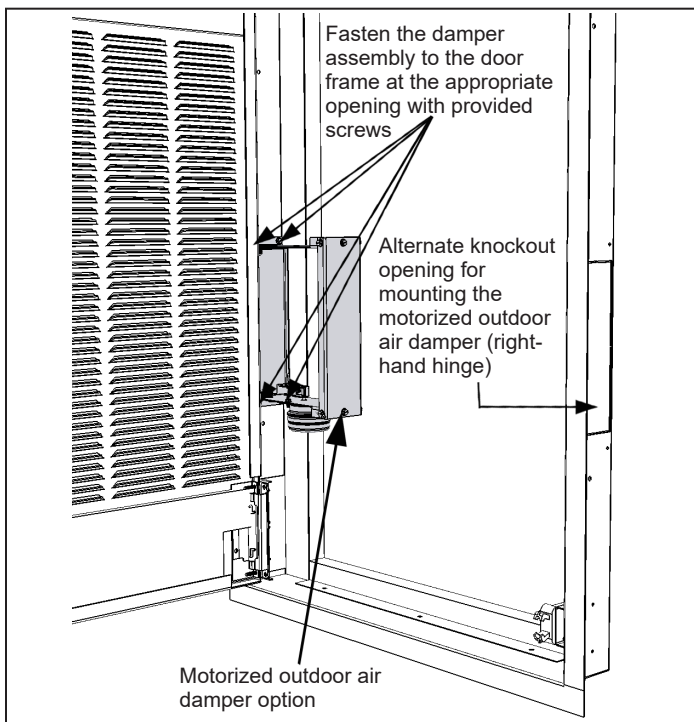

## Installing The 3.25" Deep (2-Piece) Discharge Air Diffuser

### NOTICE

Before installing drywall, install the diffuser extension frame portion of the two-piece 3.25" deep discharge air diffuser assembly to the unit. The louvered discharge air diffuser portion will slide in and be secured to the extension frame only after the unit has been framed-in and the discharge opening is cut out of the drywall.

### NOTICE

To lessen noise transmission and air leakage, avoid metal-to-metal contact. Installation of a foam seal around the unit's discharge air opening is recommended.

1. Adhere field-provided 1/2" foam seal to the face of the cabinet around the perimeter of the discharge air opening (Figure 47).
2. Attach the extension frame portion of the two-piece discharge air diffuser assembly to the foam seal around the perimeter of the cabinet discharge opening.

### NOTICE

Be sure the extension frame is level and plumb.

3. After the unit has been framed-in and the discharge opening is cut out of the drywall, slide in the louvered air diffuser through the finished drywall opening and connect to the extension frame. Secure with two (2) screws provided.


### NOTICE

To avoid bending the adjustable discharge louvers, do not press on them.

### NOTICE

When installed correctly, the diffuser frame should connect to the extension frame and seal to the cabinet discharge air opening so no discharge air is lost between the unit and the wall cavity.

**Figure 47: Installing the 3.25" Deep (2-Piece) Discharge Air Diffuser**

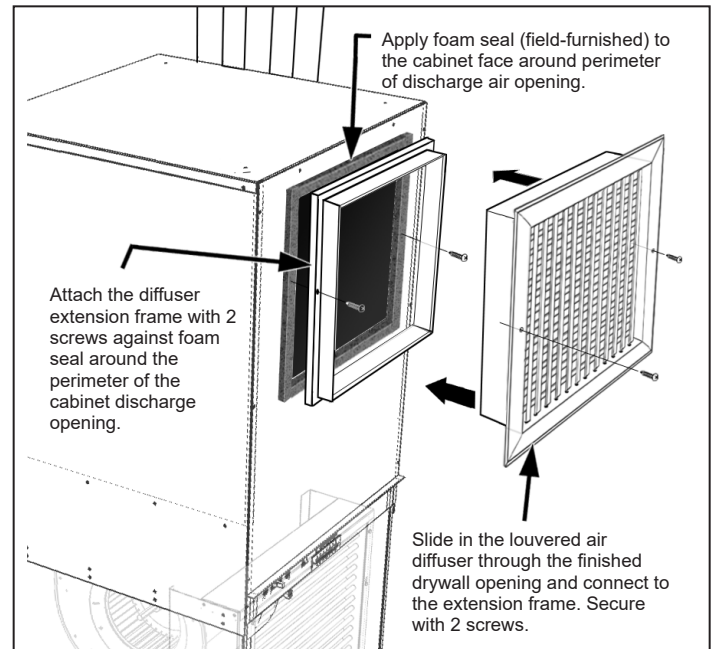



## Installing the 1.75" Deep Discharge Air Diffuser

### NOTICE

To lessen noise transmission and air leakage, avoid metal-to-metal contact. Installation of a foam seal around the unit's discharge air opening is recommended.

1. Adhere field-provided 1/2" foam seal to the face of the cabinet around the perimeter of the discharge air opening.
2. Insert the diffuser into the wall opening, and align the frame with the foam seal.

### NOTICE


To avoid bending the adjustable discharge louvers, do not press on them.

3. Push the diffuser frame in until it compresses against the foam seal and the room side frame is flush against the drywall. Be sure the diffuser frame is level and plumb. Secure it with the two (2) screws provided.

### NOTICE

When installed correctly, the diffuser frame should seal to the cabinet discharge air opening so no discharge air is lost between the unit and the wall cavity.

**Figure 48: Installing the 1.75" Deep Discharge Air Diffuser**

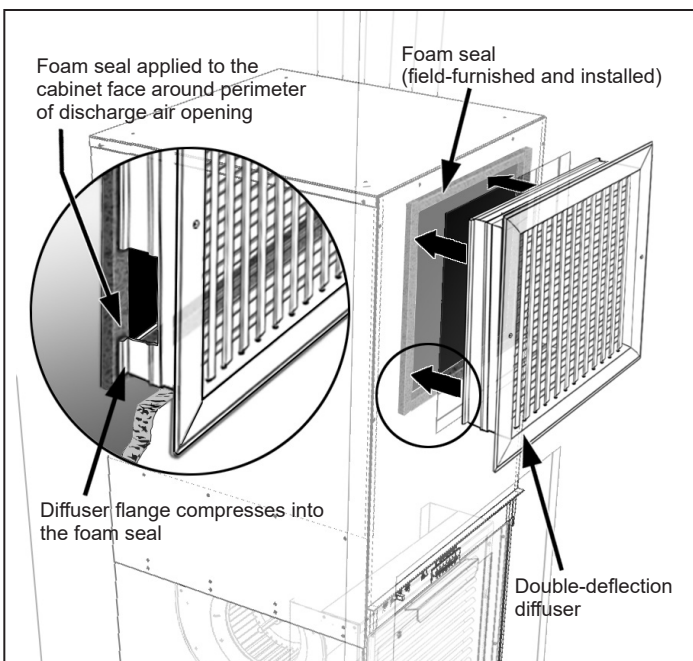

## Twin Units Installation


Twin opposite hand units share a common riser system; i.e., supply, return, and drain riser. This is commonly called a "master/secondary" arrangement. The master unit is shipped with the risers attached. These special risers have stub-outs for both the master unit and the secondary unit which must be field connected and the following procedures must be followed for all twin unit installations.

1. Secondary units ship without risers and share common risers with the master unit. Knockout holes on the

cabinet are provided for the 6" stub outs to make piping connections to the coil supply and return and the condensate drain.

2. Master units are offered in two-pipe systems with either right-hand or left-hand connections. Secondary units are offered to accommodate internal connections to any of these riser systems or locations.
3. The riser location (right or left) is determined by facing the return air grille panel. The risers are located on either the right or left of the unit. This defines the riser location.
4. The riser block-off plates are located in the base of the secondary unit. Block-offs must be installed on the secondary unit before putting it into position.

**Figure 49: Twin Unit Arrangement (Side by Side)**

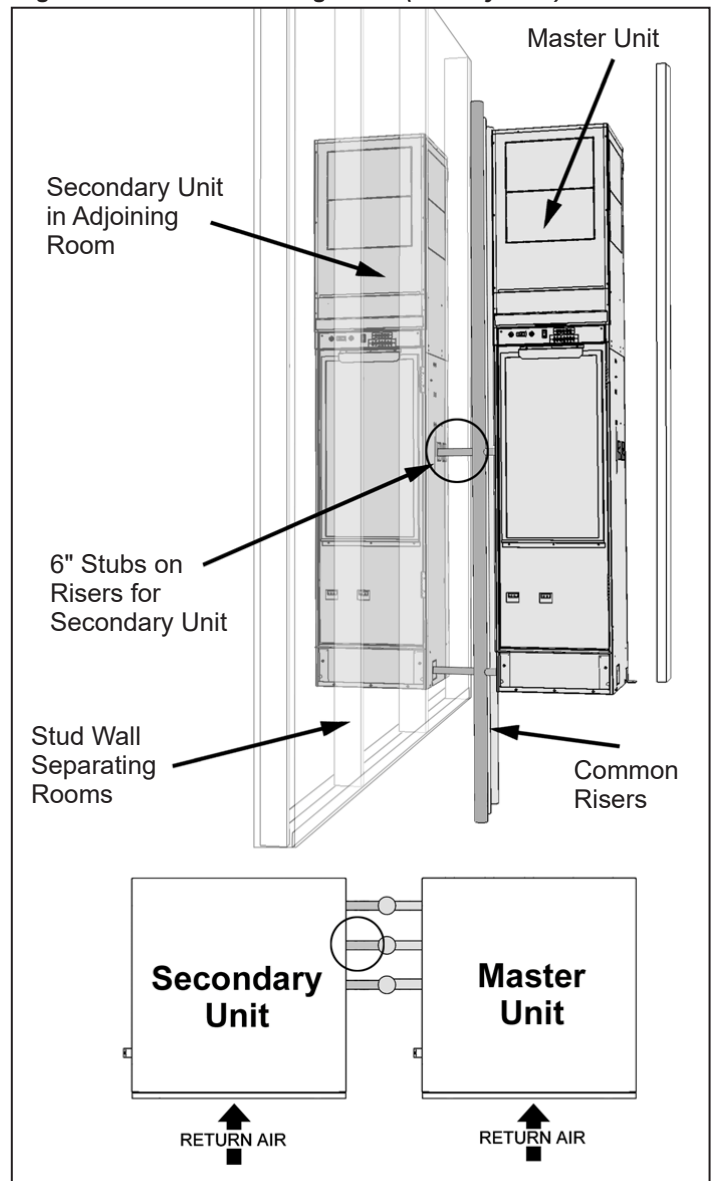

## Field Installed Accessories

### Wireless Temperature Control

The wireless thermostat option is designed to provide precision temperature control without the installation labor and expense of wiring.

- Powered by AA batteries
- Mounts in any suitable location that will provide good temperature control.
- Large LCD display provides the user with current room temperature, set point temperature, time, program interval, and other system status information.

For detailed installation and operation information, refer to the manual provided with the thermostat.

**Figure 50: Wireless Thermostat**



The second part of the wireless system is called a Remote Control Node or "RCN." An RCN interfaces with specific desired HVAC equipment, and communicates with its thermostat wirelessly. At the time of installation, the wireless thermostat is linked to the RCN. The thermostat and RCN that have been linked will not interfere with, or be affected by, any other thermostat or RCN in adjacent rooms, apartments, or neighboring homes.

**Figure 51: Remote Control Node (RCN)**



### Return Air Temperature Sensor Location for Units with Optional Wireless Thermostat

For units with the optional wireless thermostat, a Return Air Temperature (RAT) sensor is required. The RAT must be wired back to the wireless thermostat Remote Control Node (RCN). In the event that the connection between the RCN and the wireless thermostat is lost, the RCN will control the unit based on the hardwired RAT sensor. For reference, see [Figure 52](#) for the location of the RAT sensor when the RCN is factory installed.



**Figure 52: Return Air Temperature Sensor Location**



**Figure 53: For Units with Optional Return Air Temperature Sensor**



H4-4 Return Air Temp (RAT) for units with the I/O Expansion Board

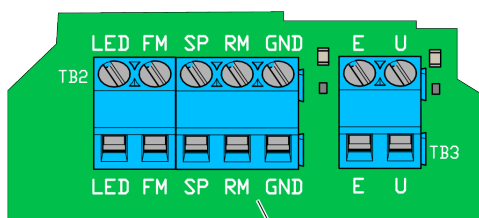


TB2 RM and GND on the main MicroTech board

**NOTE 1:** For units with the I/O expansion board, the factory supplied return air sensor (RAT) connects to I/O H4-3/4 terminal. For units without an I/O expansion board, the RAT can be wired to the RM and GND inputs of TB2 located on the main MicroTech board.

**NOTE 2:** If connecting the RAT to the room sensor's input, note that the BACnet will register a reading for local space temperature instead of return air temperature.

**Figure 54: Normally Closed, Power Open Motorized Valve**

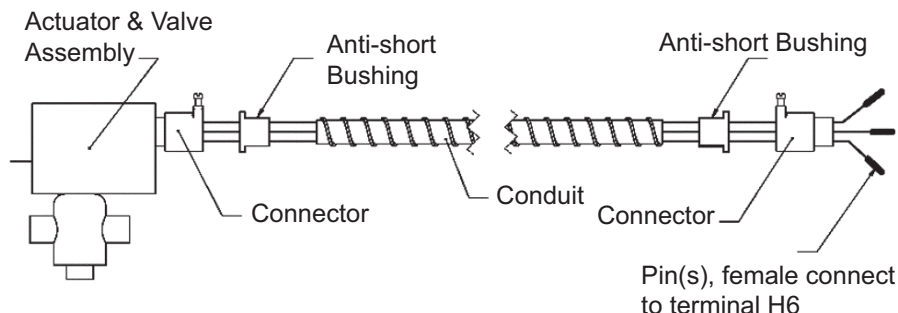

## Motorized Isolation Valve & Relay

### Motorized Isolation Valve

The motorized valve kit is available as a factory-installed or a field-installed option. Wired as shown in [Figure 55](#), the motorized valve will open on a call for compressor operation. The motorized isolation valve actuator (ISO) has a 24 V power connection.

1. Install the supplied wire harness into plug H6 on the main control board.
2. Run wires between the ISO actuator and the supplied wire harness ends.
3. Connect N.O. & N.C. actuators as shown on the schematic.

### Pump Request Relay



The MicroTech unit controller includes an internal Pump Request Relay connected to terminal H6 with three output connections. See [Table 18](#) for control operation:

The output of the internal pump request relay is 24 VAC. The output is not available when the H6 connection is used to control a motorized valve.

**Table 18: Pump Request Relay**

| Terminal Connection | Signal | Output | Description                                                                                                     |
|---------------------|--------|--------|-----------------------------------------------------------------------------------------------------------------|
| H6-1                | Common | Ground | Pump Request - Common (Ground) Terminal                                                                         |
| H6-2                | 24 VAC | N.O.   | Pump Request - Normally Open (N.O.) Terminal. Energized when cooling or heating demand is required.             |
| H6-3                | 24 VAC | N.C.   | Pump Request - Normally Closed (N.C.) Terminal. Energized when cooling or heating demand is no longer required. |


**Figure 55: Motorized Valve Wiring**

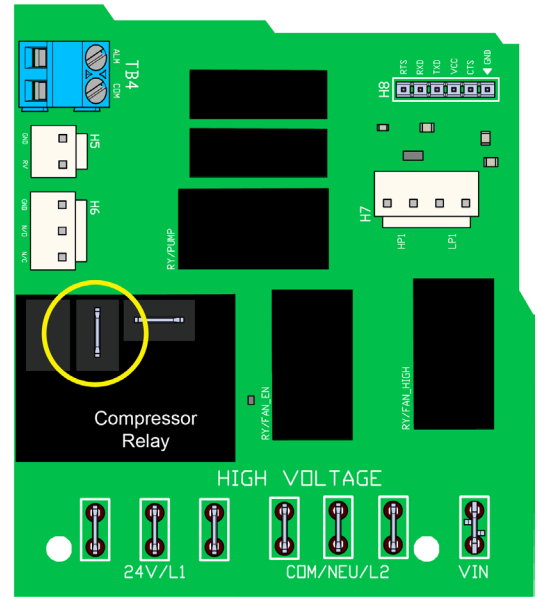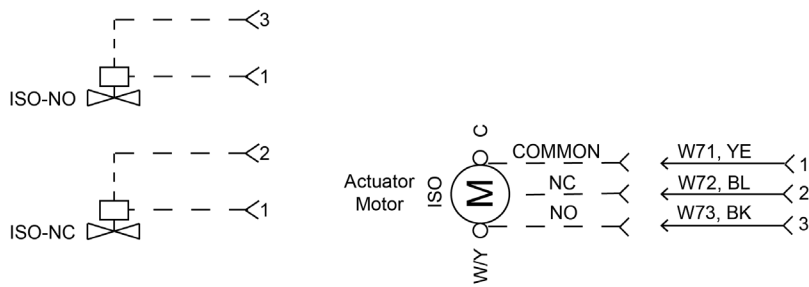

**NOTE 1:** Connectors on valve must be cut off and stripped back and the wires twisted to make connections to the H6 (IV/PR) terminals on the MT2300 controller.

**NOTE 2:** All plumbing connections are made the same, whether or not the unit has valve packages. Plumbing connections must conform with local piping and building codes. The ability to remove the unit in order to perform repairs is imperative.

**Figure 56: MT2300 wiring to an existing motorized valve from a previously installed unit with MicroTech III controller**

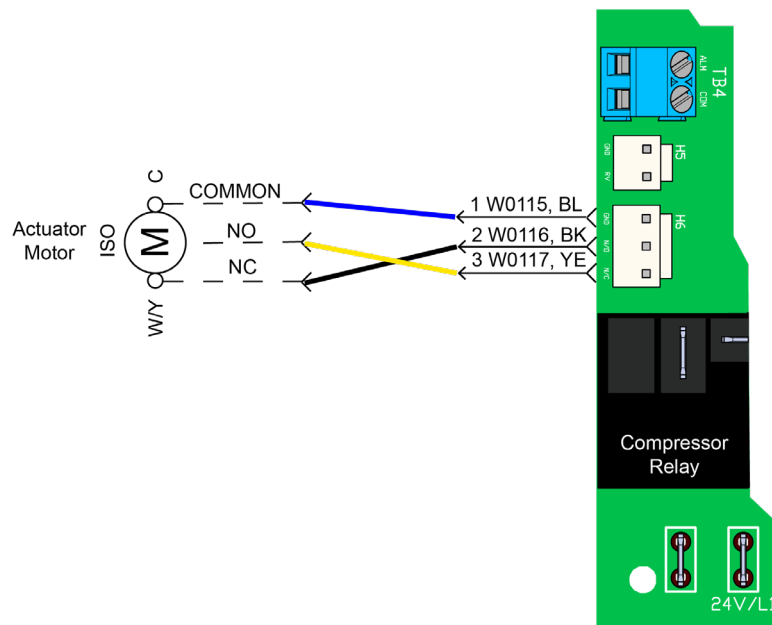


**NOTE:** If reusing a motorized valve on an existing Daikin Applied R-410A unit, the wiring harness for connections 1, 2, and 3 for the R-32 product are different. Therefore, the wiring connections (Common, N.O., and N.C.) to the motorized valve must be rewired.












## MicroTech Unit Controller, EC Motor 265/60/1

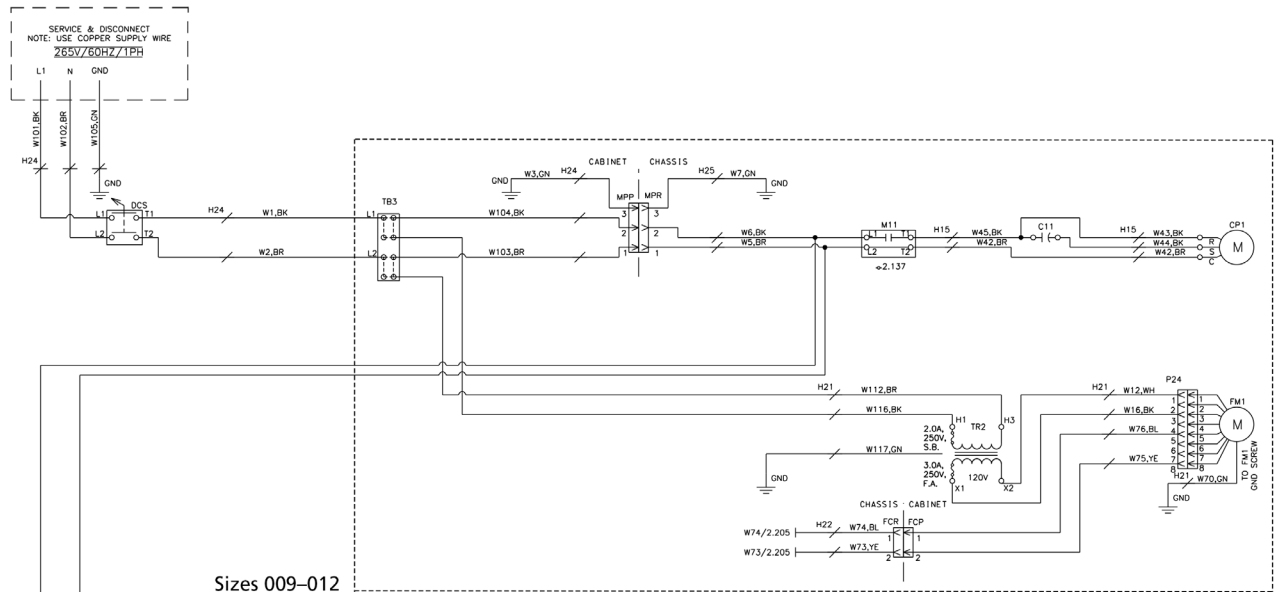


Sizes 009-012

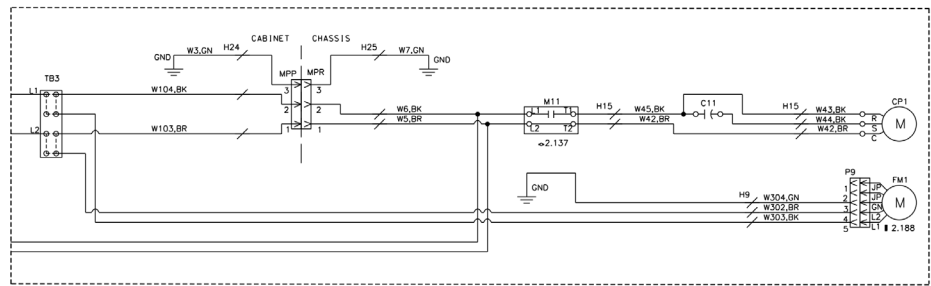

Sizes 015-018

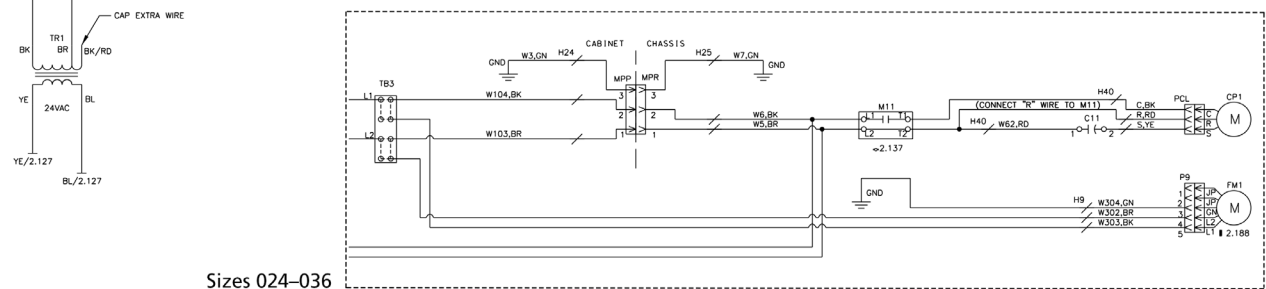


Sizes 024-036

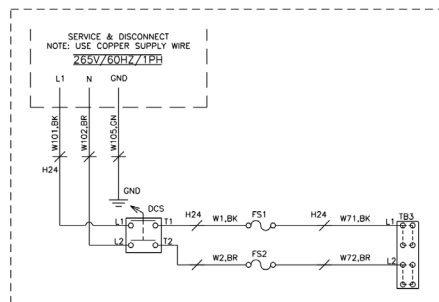


OPTION: FUSED DISCONNECT

**MicroTech Unit Controller, PSC Motor  
Thermostat Control, 208–230/60/1-Control Voltage**

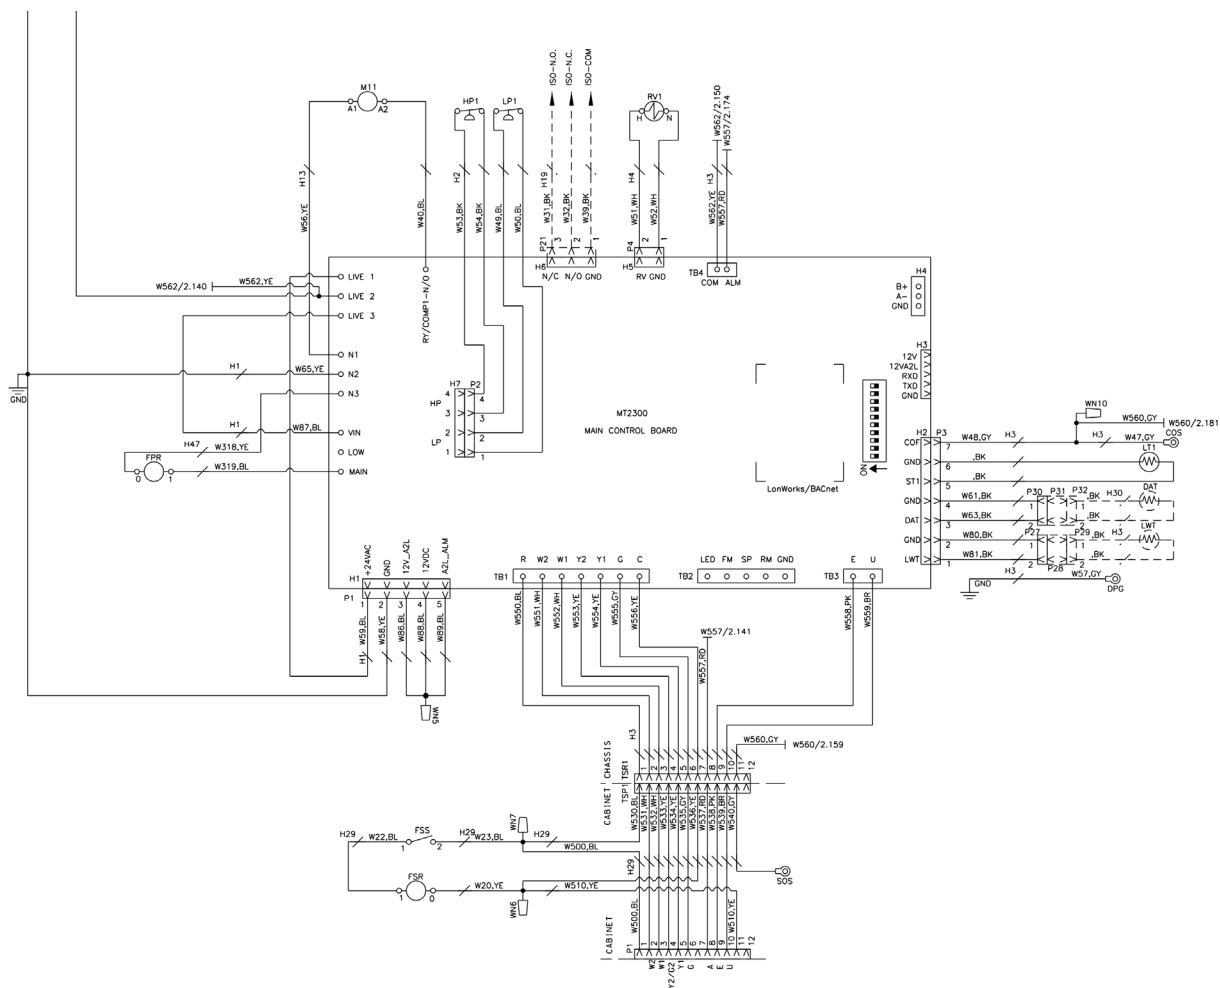


## MicroTech Unit Controller, PSC Motor 208–230/60/1

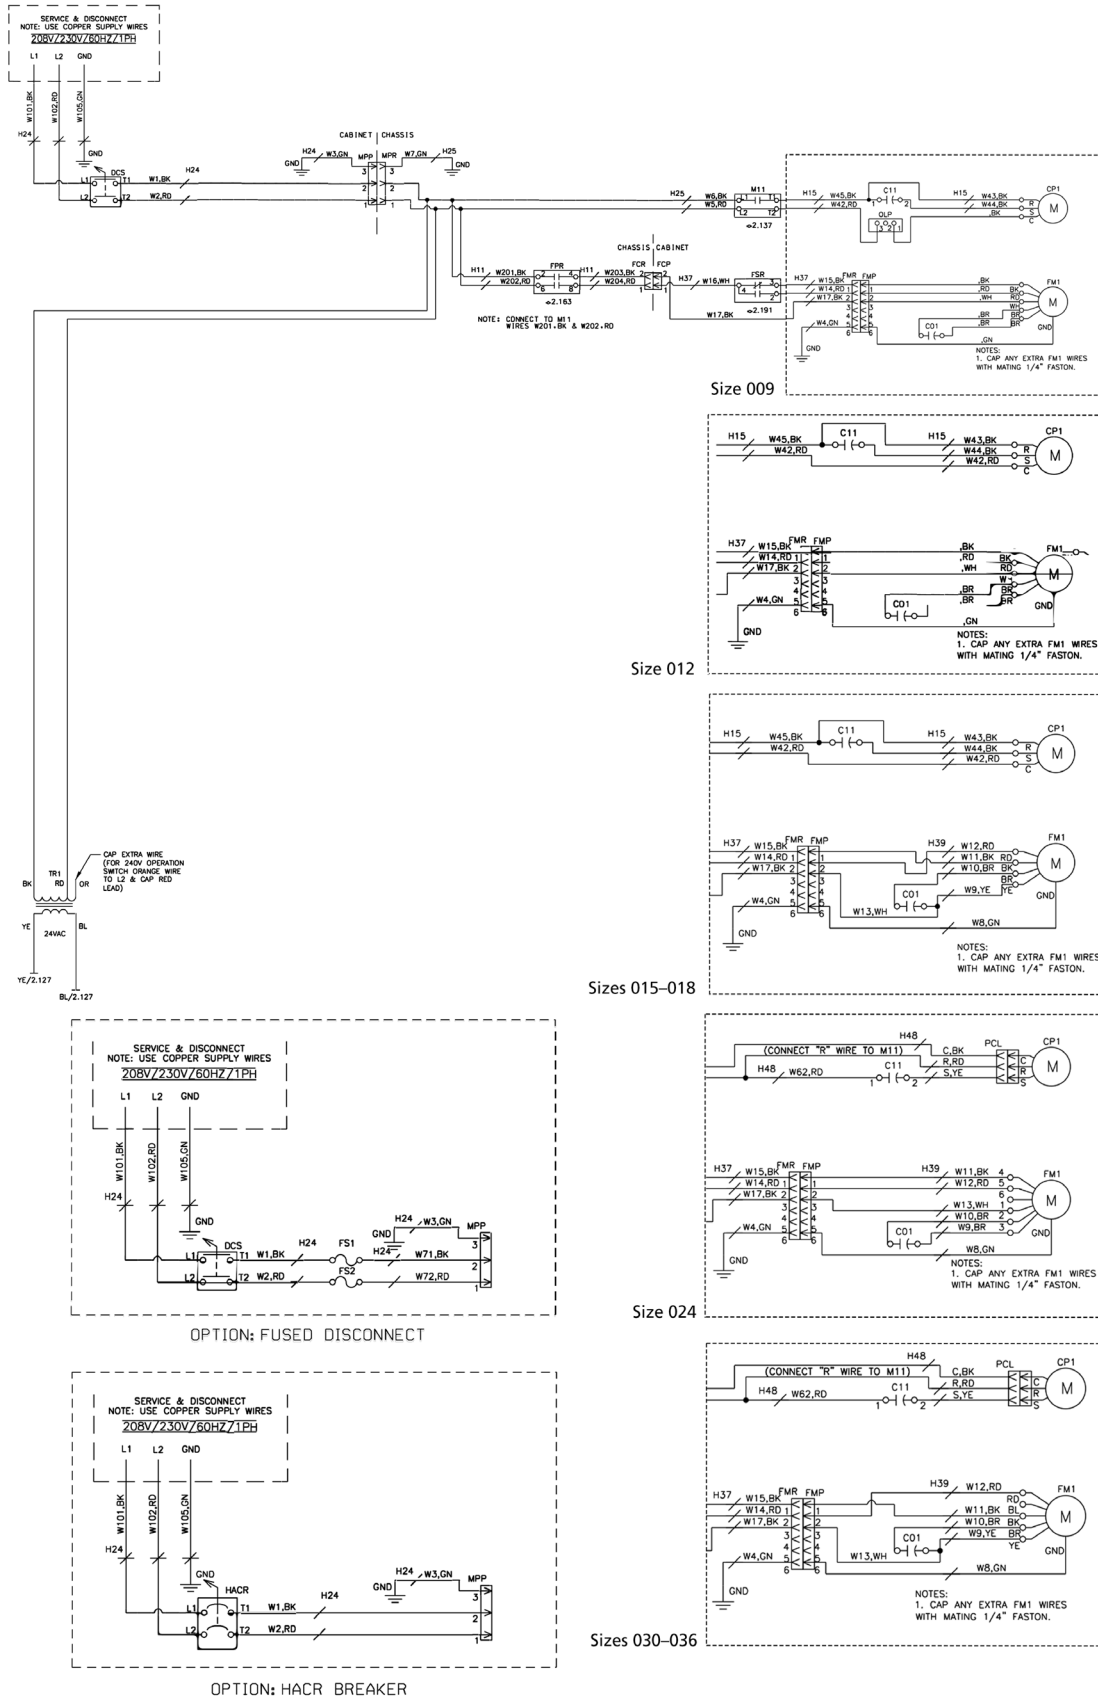



## Wireless Thermostat Wiring

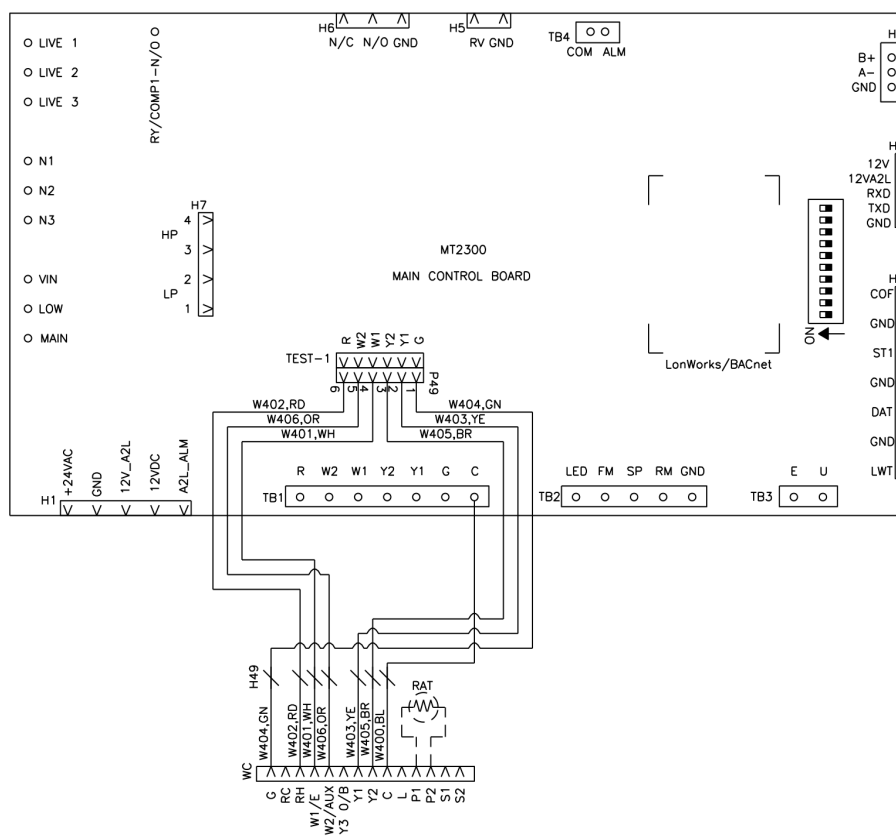

**NOTE:** Remaining connections are shown in previous diagrams.



## Wiring Schematics Legend

### NOTICE

Devices in legend may or may not be on unit.

| Abbr.  | Description                                  |
|--------|----------------------------------------------|
| CO1-4  | Fan Motor 1-4 Capacitor                      |
| C11    | Compressor 1                                 |
| CP1    | Compressor 1                                 |
| COE    | Condensate Overflow Protection Sensor-WSE    |
| COS    | Condensate Overflow Protection Sensor        |
| CUR    | Current Sensor                               |
| DAT    | Discharge Air Temperature Sensor             |
| DCS    | Disconnect Switch                            |
| DPG    | Drain Pan Ground                             |
| EB1    | Expansion Control Board 1                    |
| EH1    | Electric Heat                                |
| EWT    | Entering Water Temperature Sensor            |
| FCP    | Fan Connector Plug                           |
| FRC    | Fan Connector Receptacle                     |
| FM1-4  | Fan Motor 1-4                                |
| FPR    | Fan Power Relay                              |
| FSR    | Fan Speed Relay                              |
| FSS    | Fan Speed Switch                             |
| FS1-4  | Fuse 1-4                                     |
| GND    | Ground                                       |
| HACR   | HACR Breaker                                 |
| HP1    | High Pressure Switch 1                       |
| HYH    | Hot Water Heat Valve Actuator                |
| LAT    | Leaving Air Temperature Sensor               |
| LP1    | Low Pressure Switch 1                        |
| LT1    | Compressor Suction Line Temperature Sensor 1 |
| LWT    | Leaving Water Temperature Sensor             |
| M01-04 | Fan Motor 1-4 Contactor                      |
| M11-1  | Compressor 1, Contactor                      |

| Abbr.  | Description                         |
|--------|-------------------------------------|
| MCB    | Main Control Board                  |
| MPP    | Main Power Connector Plug           |
| MPR    | Main Power Connector Receptacle     |
| NCB    | Network Control Board               |
| OLP    | Overload Protector-Compressor Motor |
| PDPG   | Primary Drain Pan Ground            |
| R15    | Relay, Field Contacts, Alarm Output |
| R25    | Relay, Hot Gas Reheat               |
| RAT    | Return Air Temperature Sensor       |
| RV1    | Reversing Valve 1                   |
| SOS    | Secondary Overflow Sensor           |
| TB1    | Terminal Block, Line Voltage        |
| TB2    | Terminal Block, 24V                 |
| TB3    | Terminal Block, EH1 Line Voltage    |
| TR1    | Transformer-Control                 |
| TR2    | Transformer-Fan Motor               |
| TSL    | Thermostat, Wireless                |
| TS1    | Terminal Strip                      |
| TSP    | Terminal Strip Connector Plug       |
| TSR    | Terminal Strip Connector Receptacle |
| TSW    | Thermostat, Wired (Unit-Mounted)    |
| W001-^ | Wire                                |
| WC     | Wireless Controller                 |
| H001-^ | Wire Harness                        |
| WN1-^  | Wire Nut                            |
| P001-^ | Wire Plug                           |
| PCP1   | Wire Plug Assy-Compressor Power     |
| PT01   | Wire Plug Assy-2-Stage Comp Ctrl    |
| WSE    | Waterside Economizer Actuator       |

# Operation

## Start-Up



### CAUTION

Units must be checked for water leaks upon initial water system start-up. Water leaks may be a result of mishandling or damage during shipping. Failure by the installing contractor to check for leaks upon start-up of the water system could result in property damage.

## Check, Test & Start Procedure

### NOTICE

Complete the "Water Source Heat Pump Equipment Check, Test and Start Form" on [page 68](#).


## MT2300 Board LED Indicator

When the unit controller is communicating a certain fault or mode, the LED indicator will flash a designated pattern or sequence. See [Figure 57](#) for the location of the MT2300 board LED indicator. [Table 19](#) gives a description of the LED activity. Refer to OM 1364 for additional information.

**Table 19: MT2300 Board LED Indicator Sequence**

| LED Activity | Type | Color | Description                                  |
|--------------|------|-------|----------------------------------------------|
| 1 Flash      | Mode | Green | No Call for Heating/Cooling/Dehumidification |
| 2 Flash      | Mode | Green | Call for Cooling                             |
| 3 Flash      | Mode | Green | Call for Heating                             |
| 4 Flash      | Mode | Green | Call for Fan Only                            |

**Figure 57: LED Indicator on MT2300 Board**

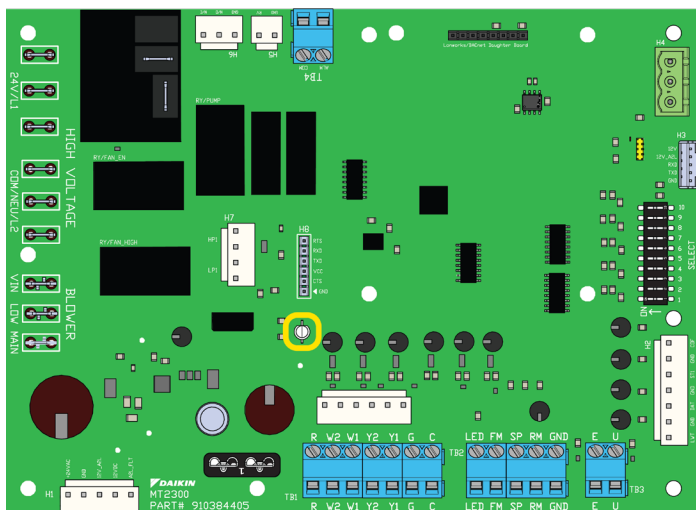

## Check as completed:

### NOTICE

To prevent compressor cycling and all compressors from starting up together after loss of power, the required minimum on/off time default is 300 seconds plus the random restart of 0 to 60 seconds.

- Open all valves to full open position and turn on power to the unit.
- Set thermostat for "Fan Only" operation by selecting "Off" at the system switch and "On" at the fan switch. If "Auto" fan operation is selected, the fan will cycle with the compressor. Check for proper air delivery.  
Check the unit controller LED indicator for "Fan Only" mode operation.
- Set thermostat to "Cool." If the thermostat is an automatic changeover type, simply set the cooling temperature to the coolest position. On manual changeover types additionally select "Cool" at the system switch.
- Check the unit controller LED indicator for "Cool" mode operation.
- After a few minutes of operation, check the discharge grilles for cool air delivery. To insure proper water flow, measure the temperature difference between entering and leaving water. The temperature differential should be 10°F to 14°F (5°C to 8°C) for units in cooling mode. It should be approximately 1½ times greater than the heating mode temperature difference. For example, if the cooling temperature difference is 15°F (8°C), the heating temperature difference should have been 10°F (5°C).
- Without automatic flow control valves, target a cooling temperature difference of 10°F to 14°F (5°C to 8°C). Adjust the combination shutoff/balancing valve in the return line to a water flow rate which will result in the 10°F to 14°F (5°C to 8°C) difference.
- Set thermostat to "Heat." If the thermostat is the automatic changeover type, set system switch to the "Auto" position and depress the heat setting to the warmest selection. With most control schemes, the fan will start immediately. After a few minutes of compressor operation, check for warm air delivery at discharge grille. If this is a "cold building" start-up, leave unit running until return air to the unit is at least 65°F (18°C).
- Check the unit controller LED indicator for "Heat" mode operation.
- Measure the temperature difference between entering and leaving air and entering and leaving water. With entering water of 60°F to 80°F (16°C to 27°C), leaving water should be 6°F to 12°F (3.3°C to 6.6°C) cooler, and the air temperature rise through the machine should not exceed 35°F (19°C). If the air temperature exceeds 35°F (19°C), then the air flow rate is inadequate.
- Check the elevation and cleanliness of the condensate line. If the air is too dry for sufficient dehumidification, slowly pour enough water into the condensate pan to ensure proper drainage.

- If the unit does not operate, check the following points:
  - Is supply voltage to the machine compatible?
  - Is thermostat type appropriate?
  - Is thermostat wiring correct?
- If the unit operates but stops after a brief period:
  - Is there proper airflow? Check for dirty filter or incorrect ductwork.
  - Is there proper water flow rate within temperature limits? Check water balancing; back flush unit if dirt-clogged.
- Check for refrigerant piping rubbing against cabinet or other piping causing vibration. Check fan wheels, set screws, shaft, etc.

## Controls

**Table 20: MicroTech 2300 Unit Controller Connector and Terminal Descriptions**


| Connector | I/O     | Type   | Signal  | Description                                                      |
|-----------|---------|--------|---------|------------------------------------------------------------------|
| H1-1      | +24VAC  | Power  | VAC     | Control Power Voltage                                            |
| H1-2      | GND     | Power  | Ground  | Control Power Common                                             |
| H1-3      | 12V_A2L | Input  | VDC     | A2L Sense Voltage                                                |
| H1-4      | 12 VDC  | Output | VDC     | A2L Mitigation Voltage                                           |
| H1-5      | A2L_ALM | Input  | Digital | A2L Fault Alarm                                                  |
| H2-1      | LWT     | Input  | Analog  | Leaving Water Temperature                                        |
| H2-2      | GND     | REF    | Common  |                                                                  |
| H2-3      | DAT     | Input  | Analog  | Discharge Air Temperature                                        |
| H2-4      | GND     | REF    | Common  |                                                                  |
| H2-5      | ST1     | Input  | Analog  | Comp1 Suction Temperature                                        |
| H2-6      | GND     | REF    | Common  |                                                                  |
| H2-7      | COF     | Input  | Analog  | Condensate Overflow                                              |
| H3-1      | 12V     | Output | VDC     | Base/Expansion Board Interface                                   |
| H3-2      | 12V_A2L | Output | VDC     |                                                                  |
| H3-3      | RXD     | COM    | UART    |                                                                  |
| H3-4      | TXD     | COM    | UART    |                                                                  |
| H3-5      | GND     | COM    | UART    |                                                                  |
| H4-1      | B(+)    | COM    | N/A     | Future Use                                                       |
| H4-2      | A(-)    | COM    | N/A     |                                                                  |
| H4-3      | GND     | COM    | N/A     |                                                                  |
| H5-1      | GND     | REF    | Common  | Comp1 Reversing Valve                                            |
| H5-2      | RV      | Output | 24 VAC  |                                                                  |
| H6-1      | GND     | REF    | Common  | Pump Request - Common (Ground) Terminal                          |
| H6-2      | NO      | Output | 24 VAC  | Pump Request - Normally Open Terminal for Normally Closed Valves |
| H6-3      | NC      | Output | 24 VAC  | Pump Request - Normally Closed Terminal for Normally Open Valves |
| H7-1,2    | LP1     | Input  | Digital | Comp1 Low Pressure                                               |
| H7-3,4    | HP1     | Input  | Digital | Comp1 High Pressure                                              |
| TB1-1     | R       | Output | 24 VAC  | Thermostat 24 VAC Power                                          |
| TB1-2     | W2      | Input  | 24 VAC  | Thermostat Heat Stage 2                                          |
| TB1-3     | W1      | Input  | 24 VAC  | Thermostat Heat Stage 1                                          |
| TB1-4     | Y2      | Input  | 24 VAC  | Thermostat Cool Stage 2                                          |
| TB1-5     | Y1      | Input  | 24 VAC  | Thermostat Cool Stage 1                                          |
| TB1-6     | G       | Input  | 24 VAC  | Thermostat Fan                                                   |
| TB1-7     | C       | REF    | Common  | Thermostat Common                                                |
| TB2-1     | LED     | Output | 5 VDC   | Room Sensor LED                                                  |

| Connector      | I/O        | Type   | Signal  | Description                            |
|----------------|------------|--------|---------|----------------------------------------|
| TB2-2          | FM         | Input  | Analog  | Room Sensor Fan/Mode                   |
| TB2-3          | SP         | Input  | Analog  | Room Sensor Setpoint Adjust            |
| TB2-4          | RM         | Input  | Analog  | Room Sensor Air Temp / Tenant Override |
| TB2-5          | GND        | REF    | Common  | Room Sensor Common                     |
| TB3-1          | E          | Input  | Digital | Emergency Shutdown                     |
| TB3-2          | U          | Input  | Digital | Unoccupied Sensor                      |
| TB4-1,2        | ALM        | Output | Digital | Alarm Output - Contact Closure         |
| BLOWER         | VIN        | Input  | VAC     | Blower Motor Voltage                   |
| BLOWER         | LOW        | Output | VIN     | Blower Motor Low Speed                 |
| BLOWER         | MAIN       | Output | VIN     | Blower Motor High Speed or ECM         |
| LIVE (Relay)   | Comp1      | Output | L1/24V  | Compressor Stage 1                     |
| LIVE x 3       | 24V/L1     | Input  | VAC     | COMP1 Line1 Control Voltage            |
| LIVE x 3       | COM/NEU/L2 | Input  | VAC     | COMP1 Line2 Control Voltage            |
| Daughter Board | BACnet     | COM    | SPI     | BACnet MS/TP Only                      |

**Table 21: MT2310 I/O Board Connectors and Terminals**

| Connector | I/O     | Type   | Signal  | Description                               |
|-----------|---------|--------|---------|-------------------------------------------|
| H1-1      | GND     | Power  | Ground  | Control Power Common                      |
| H1-2      | +24VAC  | Power  | VAC     | Control Power Voltage                     |
| H2-1      | GND     | REF    | Common  | Comp2 Suction Temperature                 |
| H2-2      | ST2     | Input  | Analog  |                                           |
| H2-3,4    | LP2     | Input  | Digital | Comp2 Low Pressure                        |
| H2-5,6    | HP2     | Input  | Digital | Comp2 High Pressure                       |
| H3-1      | 12V     | Input  | VDC     | Base/Expansion Interface                  |
| H3-2      | 12V_A2L | Input  | VDC     |                                           |
| H3-3      | TXD     | COM    | UART    |                                           |
| H3-4      | RXD     | COM    | UART    |                                           |
| H3-5      | GND     | REF    | Common  |                                           |
| H4-1      | RAT     | Input  | Analog  | Return Air Temperature                    |
| H4-2      | GND     | REF    | Common  |                                           |
| H4-3      | EWT     | Input  | Analog  | Entering Water Temperature                |
| H4-4      | GND     | REF    | Common  |                                           |
| H5-1      | GND     | REF    | Common  | Hot Gas Reheat Valve                      |
| H5-2      | HGR     | Output | 24 VAC  |                                           |
| H5-3      | GND     | REF    | Common  | Waterside Economizer Valve                |
| H5-4      | WSE     | Output | 24 VAC  |                                           |
| H5-5      | PWM     | Output | PWM     | Variable Speed Blower Motor               |
| H6-1      | GND     | REF    | Common  | Compressor Stage 2                        |
| H6-2      | COMP2   | Output | 24 VAC  |                                           |
| H6-3      | GND     | REF    | Common  | Comp2 Reversing Valve                     |
| H6-4      | RV2     | Output | 24 VAC  |                                           |
| H6-5      | GND     | REF    | Common  | Auxiliary Heat 2                          |
| H6-6      | AUX2    | Output | 24 VAC  |                                           |
| H6-7      | GND     | REF    | Common  | Auxiliary Heat 1 / Hydronic Heat          |
| H6-8      | AUX1    | Output | 24 VAC  |                                           |
| TB1-1     | C       | REF    | Common  | Input Common                              |
| TB1-2     | RH      | Input  | Analog  | Space Relative Humidity                   |
| TB1-3     | HST     | Input  | 24VAC   | Humidistat                                |
| TB1-4     | W3      | Input  | 24VAC   | Thermostat - Stage 3 Heat                 |
| TB1-5     | W4      | Input  | 24VAC   | Thermostat - Stage 4 Heat or Stage 3 Cool |
| TB1-6     | R       | Output | 24 VAC  | Thermostat - 24 VAC Power                 |

Figure 58: MicroTech2300 Unit Controller and MicroTech 2310 I/O Expansion Board Terminal Location

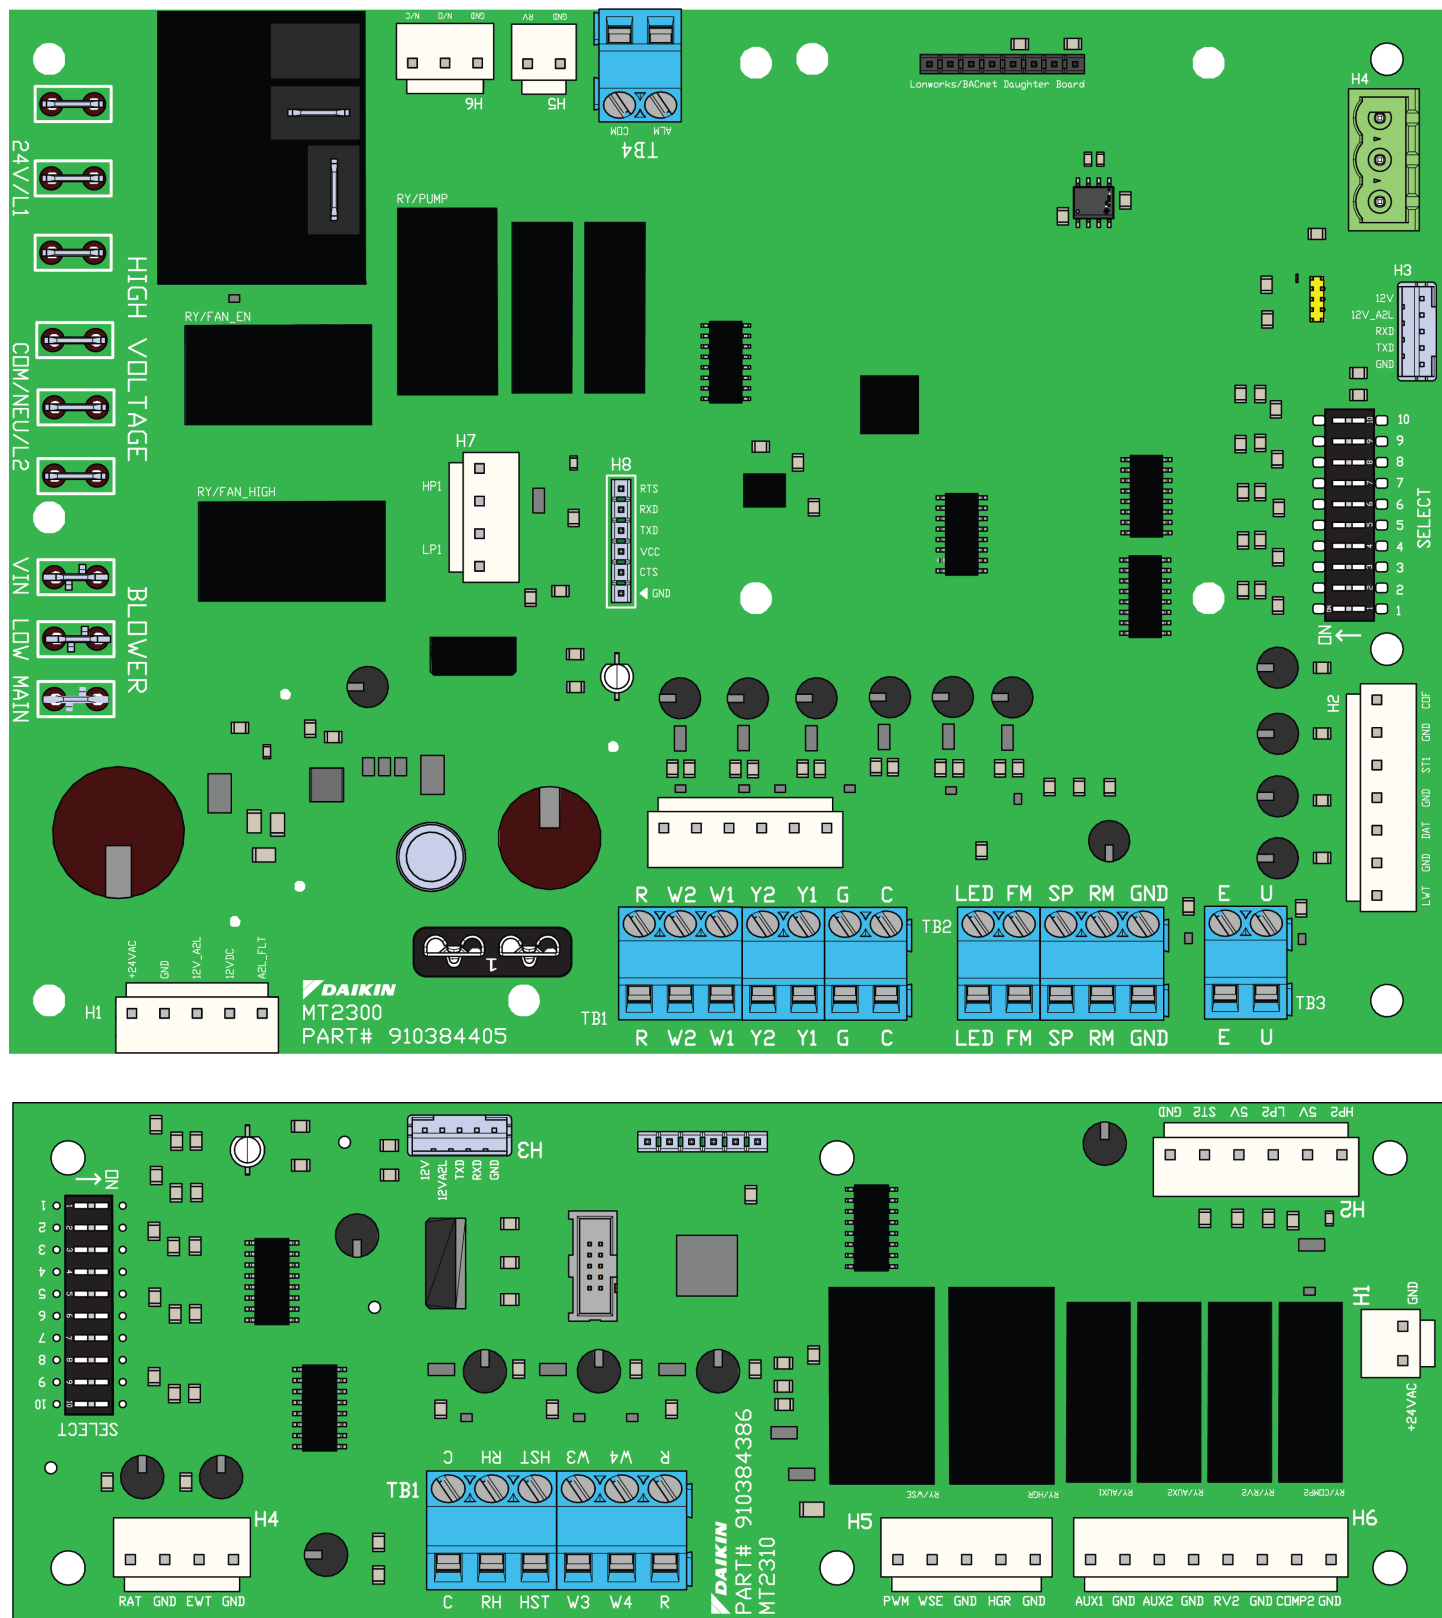


## Configuration DIP Switches

### WARNING

Proper antifreeze/water solution is required to minimize the potential of fluid freeze-up. Switch SW3 is factory set for water freeze protection with the switch closed. Operation at fluid temperatures below 32°F (0°C) with anti-freeze protection requires SW3 to be field configured for the switch on. If unit is employing a fresh water system (no anti-freeze protection), it is extremely important that SW3 switch setting remains in the off position (factory default setting) in order to shut down the unit at the appropriate water temperature to protect your heat pump from freezing. Failure to do so can result in unit damage or property damage and will void unit warranty.

**Figure 59: Location of Configuration DIP Switches on the MT2300 Unit Controller**

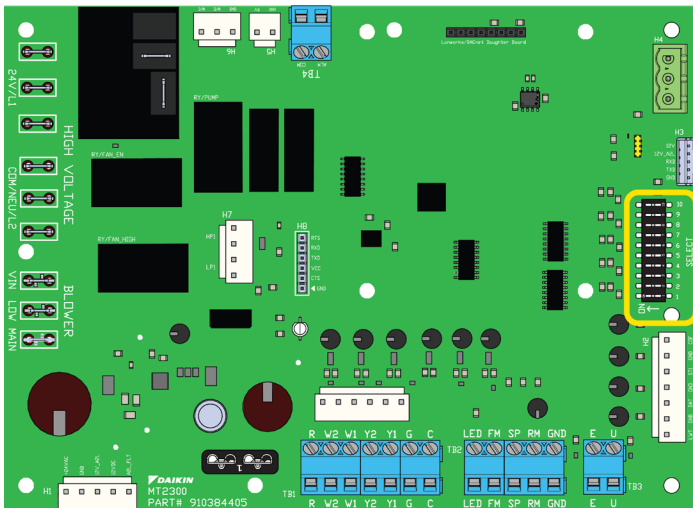

### CAUTION

The MT2300 unit controller incorporates static sensitive devices. A static charge from touching the device can damage the electronic components. To help prevent damage during service, use static discharge wrist straps. Static discharge wrist straps are grounded to the heat pump chassis through a 1M ohm resistor.

**Table 22: MT2300 Main Board DIP Switch Settings**


| Switch           | Description                       | Position      | Model/Options                             |
|------------------|-----------------------------------|---------------|-------------------------------------------|
| SW1              | Normal/Test Mode                  | SW1 = OFF (0) | Normal Operation                          |
|                  |                                   | SW1 = ON (1)  | Service/Test Mode                         |
| SW2              | Fan Operation                     | SW2 = OFF (0) | Continuous Fan Operation (On)             |
|                  |                                   | SW2 = ON (1)  | Cycling Fan Operation (Auto)              |
| SW3 <sup>1</sup> | Loop Fluid                        | SW3 = OFF (0) | Water Loop Fluid                          |
|                  |                                   | SW3 = ON (1)  | Glycol Loop Fluid                         |
| SW4              | Freeze Fault Detect (FFD)         | SW4 = OFF (0) | Disabled FFD                              |
|                  |                                   | SW4 = ON (1)  | Enabled FFD with LWT sensor installed     |
| SW5              | Room Sensor Setpoint Adjust Range | SW5 = OFF (0) | Short Range -5 to +5 F (-2.78 to +2.78 C) |
|                  |                                   | SW5 = ON (1)  | Long Range 55 to 95 F (12.78 to 35 C)     |

| Switch               | Description                            | Position                       | Model/Options                                                  |
|----------------------|----------------------------------------|--------------------------------|----------------------------------------------------------------|
| SW6                  | Thermostat/Room Sensor Control         | SW6 = OFF (0)                  | Thermostat Control                                             |
|                      |                                        | SW6 = ON (1)                   | Room Sensor Control                                            |
| SW7/SW8 <sup>2</sup> | Single Compressor Heating Source       | SW7 = OFF (0)                  | Allow Compressor in Heating Mode                               |
|                      |                                        | SW7 = ON (1)                   | Disable Compressor in Heating Mode                             |
|                      | Single Compressor I/O Expansion Module | SW8 = OFF (0)                  | I/O Expansion Module Not Required                              |
|                      |                                        | SW8 = ON (1)                   | I/O Expansion Module is Required                               |
|                      | Two Compressor Availability            | SW7 = OFF (0)<br>SW8 = OFF (0) | Both Compressors Available (Automatic Compressor Fail Replace) |
|                      |                                        | SW7 = ON (1)<br>SW8 = OFF (0)  | Lead Compressor Available (Lag Compressor is Off-Line)         |
| SW9                  | WSHP Base Board Application Select     | SW9 = OFF (0)                  | Single Compressor WSHP Application                             |
|                      |                                        | SW9 = ON (1)                   | Two Compressor Application                                     |
| SW10                 | Discrete/Variable Speed Fan Select     | SW10 = OFF (0)                 | Fan Single (Fan Main Output) or Variable (PWM) Speed           |
|                      |                                        | SW10 = ON (1)                  | Dual Speed Fan (Low & High Discrete Outputs)                   |

<sup>1</sup> See Warning under "Configuration DIP Switches" for DIP switch 3 (SW3) setting information.

<sup>2</sup> The functionality of SW7 and SW8 depends on the setting of SW9. If SW9 is OFF, SW7 and SW8 will be for Heating Source and I/O Expansion Module functionality. If SW9 is ON, SW7 and SW8 will be for Compressor Availability functionality.

**Figure 60: MT2310 I/O Expansion DIP Switches**

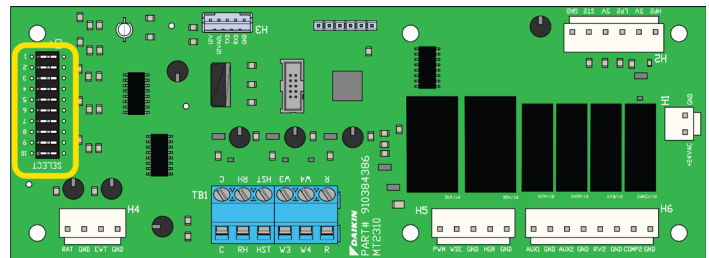

**Table 23: MT2310 I/O Expansion Module DIP Switch Settings**

| Switch  | Description                      | Position                       | Model/Options                                                                                                    |
|---------|----------------------------------|--------------------------------|------------------------------------------------------------------------------------------------------------------|
| SW1-4   | Variable Fan Speed Row Selection | 0000 to 1111 Binary            | Variable Speed Fan Row Selection (1 to 16), used when "nciVsNetCnfgEn" is set to "Disable" the network override. |
| SW5/SW6 | Secondary Heating Options        | SW5 = OFF (0)<br>SW6 = OFF (0) | None                                                                                                             |
|         |                                  | SW5 = ON (1)<br>SW6 = OFF (0)  | Supplemental Electric Heat                                                                                       |
|         |                                  | SW5 = OFF (0)<br>SW6 = ON (1)  | Boilerless Electric Heat                                                                                         |
|         |                                  | SW5 = ON (1)<br>SW6 = ON (1)   | Hydronic Heating                                                                                                 |



| Switch      | Description                            | Position       | Model/Options                 |
|-------------|----------------------------------------|----------------|-------------------------------|
| <b>SW7</b>  | Hot Gas Reheat (HGRH)                  | SW7 = OFF (0)  | HGRH Disabled                 |
|             |                                        | SW7 = ON (1)   | HGRH Enabled                  |
| <b>SW8</b>  | Waterside Economizer (WSE)             | SW8 = OFF (0)  | Waterside Economizer Disabled |
|             |                                        | SW8 = ON (1)   | Waterside Economizer Enabled  |
| <b>SW9</b>  | WSHP I/O Expansion Application Select  | SW9 = OFF (0)  | Single Compressor Application |
|             |                                        | SW9 = ON (1)   | Two Compressor Application    |
| <b>SW10</b> | Single Compressor: Speed               | SW10 = OFF (0) | Single Speed Compressor       |
|             |                                        | SW10 = ON (1)  | Dual Speed Compressor         |
|             | Two Compressor: Lead Compressor Select | SW10 = OFF (0) | Compressor #1 is Lead         |
|             |                                        | SW10 = ON (1)  | Compressor #2 is Lead         |

**NOTE:** The functionality of SW10 depends on the setting of SW9. If SW9 is OFF, SW10 will be for Single Compressor Speed. If SW9 is ON, SW10 will be for Lead Compressor Select.

## MicroTech SmartSource Unit Controller

The MicroTech SmartSource unit controller allows thermostat, Daikin Applied sensor and DDC standalone operation. The R (24VAC) terminal is used to operate thermostat inputs G, Y1, Y2, W1, W2, W3, W4 and TB2. The C (common) terminal is used to control inputs U and E. No external power sources may be used to operate the MicroTech controller. All units must be properly grounded per local code requirements.

### NOTICE

For information on sequence of operation and troubleshooting refer to OM 1364.

## Remote Reset of Automatic Lockouts

The Remote Reset feature provides the means to remotely reset automatic lockouts. There are three (3) ways to accomplish a unit reset once the fault condition has been remedied:

- Using the thermostat cycle from cool or heat to off and back to heat or cool two times within 30 seconds
- Press the Room Sensor or Thermostat Timed Override/Reset Button for more than 10 seconds
- Turn the unit power off and wait 10 seconds to turn back on.

When the cause of the fault condition has been remedied, and the unit is cycled from not requiring heating or cooling to needing heating or cooling twice within 30 seconds (accomplished by user manipulation of the Heat/Cool/ Auto/Off switch on the thermostat), an alarm reset equivalent to a tenant override button reset is generated. The intelligent reset counter and the 24 hour timer are cleared when this type of alarm reset is generated.

### NOTICE

This feature only applies to thermostat controlled systems.

For room sensor controlled units, pressing the “Override” or “Reset” button for more than 10 seconds will apply a ground signal to the Room Temperature Sensor connection at TB2 pin 4, RS clearing the lockout alarm once the cause of the fault condition has been remedied.

A unit power cycle can also be used to clear an automatic lockout if the conditions causing the fault have been remedied.

**Table 24: MT2300 Unit Controller Status LEDs**

| LED Activity | Type  | Color  | Description                                      |
|--------------|-------|--------|--------------------------------------------------|
| Steady ON    | Fault | Yellow | MCU Not Programmed                               |
| Steady ON    | Fault | Red    | MCU Hardware Failure                             |
| 1 Flash      | Fault | R–Y–G  | Invalid Configuration                            |
| 2 Flash      | Fault | R–Y–G  | Incompatible Software                            |
| 1 Flash      | Fault | R–Y    | I/O Exp Board Communications Fail                |
| 1 Flash      | Mode  | G–Y    | Service / Test Mode Active                       |
| Rapid Flash  | Fault | Red    | A2L Mitigation – Refrigerant Leak                |
| 1 Flash      | Fault | Red    | Compressor #1 High Pressure                      |
| 2 Flash      | Fault | Red    | Compressor #1 Low Pressure                       |
| 3 Flash      | Fault | Red    | Compressor #1 Suction Temp Sensor Out of Range   |
| 4 Flash      | Fault | Red    | Compressor #1 Low Suction Temp                   |
| 5 Flash      | Fault | Red    | Compressor #2 High Pressure                      |
| 6 Flash      | Fault | Red    | Compressor #2 Low Pressure                       |
| 7 Flash      | Fault | Red    | Compressor #2 Suction Temp Sensor Out of Range   |
| 8 Flash      | Fault | Red    | Compressor #2 Low Suction Temp                   |
| 9 Flash      | Fault | Red    | A2L Mitigation – Control Board Without Power     |
| Rapid Flash  | Mode  | Yellow | A2L Mitigation – Refrigerant Sensor Out of Range |
| 1 Flash      | Fault | Yellow | Compressor Low Voltage Brownout                  |
| 2 Flash      | Fault | Yellow | Freeze Fault Detect (FFD)                        |
| 3 Flash      | Fault | Yellow | Control Temp Sensor Out of Range                 |
| 4 Flash      | Fault | Yellow | Entering Water Temp Sensor Out of Range          |
| 5 Flash      | Fault | Yellow | Leaving Water Temp Sensor Out of Range           |
| 6 Flash      | Fault | Yellow | Relative Humidity Sensor Out of Range            |
| 7 Flash      | Fault | Yellow | Condensate Overflow                              |
| 8 Flash      | Fault | Yellow | Space Temp Sensor Out of Range                   |
| 9 Flash      | Fault | Yellow | Return Air Temp Sensor Out of Range              |
| Rapid Flash  | Mode  | Green  | Emergency Shutdown                               |
| 1 Flash      | Mode  | Green  | No Call for Heating / Cooling / Dehumidification |
| 2 Flash      | Mode  | Green  | Call for Cooling                                 |
| 3 Flash      | Mode  | Green  | Call for Heating                                 |
| 4 Flash      | Mode  | Green  | Call for Fan Only                                |

| LED Activity | Type | Color | Description                     |
|--------------|------|-------|---------------------------------|
| 5 Flash      | Mode | Green | Unoccupied Mode Active          |
| 6 Flash      | Mode | Green | Call for Dehumidification       |
| 7 Flash      | Mode | Green | Low Entering Water Temp         |
| 8 Flash      | Mode | Green | HGRH Low Return Air Temp Cutout |
| 9 Flash      | Mode | Green | WSE Low Temp Cutout             |

**Table 25: MT2310 I/O Expansion Board Status LEDs**

| LED Activity | Type  | Color              | Description                       |
|--------------|-------|--------------------|-----------------------------------|
| 1 Flash      | Mode  | Green <sup>1</sup> | Variable Speed Fan OFF            |
| 2 Flash      | Mode  | Green <sup>1</sup> | Variable Speed Fan ON: 0 to 20%   |
| 3 Flash      | Mode  | Green <sup>1</sup> | Variable Speed Fan ON: 21 to 30%  |
| 4 Flash      | Mode  | Green <sup>1</sup> | Variable Speed Fan ON: 31 to 40%  |
| 5 Flash      | Mode  | Green <sup>1</sup> | Variable Speed Fan ON: 41 to 50%  |
| 6 Flash      | Mode  | Green <sup>1</sup> | Variable Speed Fan ON: 51 to 60%  |
| 7 Flash      | Mode  | Green <sup>1</sup> | Variable Speed Fan ON: 61 to 70%  |
| 8 Flash      | Mode  | Green <sup>1</sup> | Variable Speed Fan ON: 71 to 80%  |
| 9 Flash      | Mode  | Green <sup>1</sup> | Variable Speed Fan ON: 81 to 90%  |
| 10 Flash     | Mode  | Green <sup>1</sup> | Variable Speed Fan ON: 91 to 100% |
| Steady ON    | Fault | Yellow             | MCU Not Programmed                |
| Steady ON    | Fault | Red                | MCU Hardware Failure              |
| 1 Flash      | Fault | R-Y-G              | Invalid Configuration             |
| 2 Flash      | Fault | R-Y-G              | Incompatible Software             |
| 1 Flash      | Fault | R-Y                | Base Board Communications Failure |
| Rapid Flash  | Fault | Red                | A2L Mitigation - Alarm Condition  |

<sup>1</sup> When the BACnet network is overriding the fan speed DIP switch selection, the LED interval color will be yellow instead of green.

**Table 26: Priority Level of Faults and Modes with Resets**

| Alarm Enumeration (BACnet) | Fault                        | Indication                                                                     | Reset <sup>1</sup> |
|----------------------------|------------------------------|--------------------------------------------------------------------------------|--------------------|
| 1                          | No Alarm                     | Normal operation                                                               | NA                 |
| 2                          | MT2310 Communication Failure | Single compressor unit with SW #8 set to ON position                           | A                  |
| 3                          | Incompatible Software        | Incorrect Software Part or Version Numbers                                     | P                  |
| 4                          | Invalid Configuration        | Base & IO Exp Application Mismatch or MT2310 detected but not required (SW #8) | P                  |
| 5                          | A2L Alarm                    | A2L refrigerant leak detected                                                  | A                  |
| 6                          | A2L Error - Power            | A2L mitigation control is not powered                                          | A                  |
| 7                          | Compressor Low Voltage       | "Brownout" condition exists                                                    | A                  |
| 8                          | Comp #1 High Pressure        | Compressor #1 high pressure switch opened                                      | T,N                |
| 9                          | Comp #2 High Pressure        | Compressor #2 high pressure switch opened                                      | T,N                |
| 10                         | Comp #1 Low Pressure         | Compressor #1 low pressure switch opened                                       | T,N                |

| Alarm Enumeration (BACnet) | Fault                                    | Indication                                         | Reset <sup>1</sup> |
|----------------------------|------------------------------------------|----------------------------------------------------|--------------------|
| 11                         | Comp #2 Low Pressure                     | Compressor #2 low pressure switch opened           | T,N                |
| 12                         | Comp #1 Suction Temp Sensor              | Compressor #1 suction temp sensor failure          | N                  |
| 13                         | Comp #2 Suction Temp Sensor              | Compressor #2 suction temp sensor failure          | N                  |
| 14                         | Leaving Water Temp (LWT) Sensor          | LWT sensor not present (SW #4 = ON)                | N                  |
| 15                         | Freeze Fault Detect (FFD)                | LWT sensor temp below freeze setpoint (SW #4 = ON) | T,N                |
| 16                         | Comp #1 Low Suction Temp (ST1)           | ST1 sensor temp below minimum setpoint             | A,T,N <sup>2</sup> |
| 17                         | Comp #2 Low Suction Temp (ST2)           | ST2 sensor temp below minimum setpoint             | A,T,N <sup>2</sup> |
| 18                         | A2L Error - Sensor                       | A2L sensor lost communication or reported failure  | A                  |
| 19                         | Control Temp Sensor Failure              | Room Temp and Return Air Temp sensor failures      | N                  |
| 20                         | Entering Water Temp (EWT) Sensor Failure | EWT sensor reading "out of range"                  | N                  |
| 21                         | Room Temp Sensor Failure                 | Room temp sensor reading "out of range"            | N                  |
| 22                         | Return Air Temp Sensor Failure           | RAT sensor reading "out of range"                  | N                  |
| 23                         | Space RH Sensor Failure                  | Space RH sensor reading "out of range"             | N                  |
| 24                         | Low Entering Water Temp (EWT)            | EWT sensor reading below minimum setpoint          | A                  |
| 25                         | Condensate Overflow                      | Condensate overflow sensor indicates water present | A,N                |
| 26                         | Waterside Economizer (WSE) Low Temp      | WSE temp sensor reading below minimum setpoint     | A                  |

<sup>1</sup> "A" = Auto Reset, "T" = Tenant Override Button Reset, "N" = Network Reset, "P" = power cycle only

<sup>2</sup> Low suction temperature faults have "Intelligent Reset" logic - 3 faults in a 24 hour period disables the auto reset function.

**Table 27: I/O Expansion Module Configuration Switch**

| Fan Speed Row | Switch 1 | Switch 2 | Switch 3 | Fan Only <sup>1</sup> | Cool Stage 1 | Cool Stage 2 | Heat Stage 1 | Heat Stage 2 |
|---------------|----------|----------|----------|-----------------------|--------------|--------------|--------------|--------------|
| 1             | OFF      | OFF      | OFF      | 20%                   | 80%          | 100%         | 80%          | 100%         |
| 2             | ON       | OFF      | OFF      | 20%                   | 70%          | 90%          | 70%          | 90%          |
| 3             | OFF      | ON       | OFF      | 20%                   | 60%          | 80%          | 60%          | 80%          |
| 4             | ON       | ON       | OFF      | 20%                   | 50%          | 70%          | 50%          | 70%          |
| 5             | OFF      | OFF      | ON       | 20%                   | 65%          | 85%          | 65%          | 85%          |
| 6             | ON       | OFF      | ON       | 20%                   | 55%          | 75%          | 55%          | 75%          |
| 7             | OFF      | ON       | ON       | 20%                   | 50%          | 65%          | 50%          | 65%          |
| 8             | ON       | ON       | ON       | 20%                   | 50%          | 55%          | 50%          | 55%          |

<sup>1</sup> When in Fan Only (SW4) mode, OFF = 20% and ON = Cool Stage 1 speed (heat or cool mode fan speeds not affected).



## Fan Speed Configuration Switches (SW1, SW2, SW3)

Configuration Switches on the I/O expansion module allow maximum CFM settings to be field adjustable. Fan speed control optimizes unit fan speed (CFM) based on thermostat/room sensor inputs. The fan speed switch allows for manually setting an optimal CFM specific to the application requirements. Each setting on the fan speed configuration switches represents settings 1-8. See [Table 27 on page 59](#) for the complete list of fan speed selector switch settings. Additionally SW3 can be used to reduce the CFM setting. Setting the SW3 to On will reduce the output signal by 15% of its maximum value, with a minimum output of 50% of the maximum value while heating, cooling, or dehumidifying.

### NOTICE

Always disconnect power to the unit prior to making changes to the DIP switch settings on the interface board. The new settings will take effect once power is restored to the unit.

## BACnet Communication Module

On units with an optional BACnet communication module, fan speeds can be set through network communications to 1% resolution of duty cycle. For hydronic or compressorized modes, the range is 50-100%, and for fan only mode, the range is 10-100%. When enabled, the network fan speed settings will override the local configuration switches. When the MT2310 status LED interval is yellow instead of Off (for example: green-off-green-off-yellow), this indicates that the network is overriding the fan speed settings.

## Fan Only Speed Configuration Switch (SW4)

In addition to the SW1, SW2, and SW3 switches, all units have the capability to set Fan Only CFM values independent to those associated with other modes of operation using the SW4 switch. When the SW4 switch is Off the fan only speed will be fixed at the speed associated with a low 20% duty cycle output. When the SW4 switch is On, the Fan Only speed will match the speed for the Stage 1/Low CFM output.

For example, unit size 036 with SW1 and SW2 switches set at Setting #3, SW3 set at Off, and SW4 set at On, will deliver 1205 CFM at stage 2 compressor operation mode, 1060 CFM at stage 1 compressor operation, 1060 CFM in fan only mode, and 1060 CFM in hydronic heat mode.

Figure 61: SW1 & SW2 Location on The I/O Expansion Module

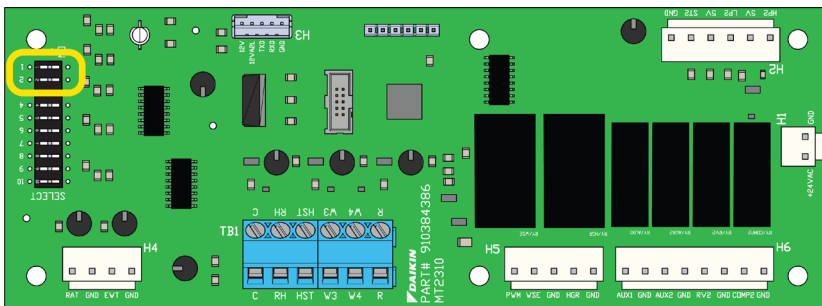


Table 28: Representative Data for Size 036, Constant CFM

| Unit Size | Fan Setting <sup>2</sup> | Maximum ESP (in. wg.) | Low CFM Heat <sup>1</sup> | High CFM Heat <sup>1</sup> | Low CFM Cool <sup>1</sup> | High CFM Cool <sup>1</sup> | Fan Only <sup>3</sup> | Hydronic Heat |
|-----------|--------------------------|-----------------------|---------------------------|----------------------------|---------------------------|----------------------------|-----------------------|---------------|
| 036       | Fan Speed 1              | 0.5                   | 1205                      | 1350                       | 1205                      | 1350                       | 770                   | 1205          |
|           | Fan Speed 2              |                       | 1135                      | 1280                       | 1135                      | 1280                       | 770                   | 1135          |
|           | Fan Speed 3              |                       | 1060                      | 1205                       | 1060                      | 1205                       | 770                   | 1060          |
|           | Fan Speed 4              |                       | 990                       | 1135                       | 990                       | 1135                       | 770                   | 990           |
|           | Fan Speed 5              |                       | 1095                      | 1240                       | 1095                      | 1240                       | 770                   | 1095          |
|           | Fan Speed 6              |                       | 1025                      | 1170                       | 1025                      | 1170                       | 770                   | 1025          |
|           | Fan Speed 7              |                       | 990                       | 1095                       | 990                       | 1095                       | 770                   | 990           |
|           | Fan Speed 8              |                       | 990                       | 1025                       | 990                       | 1025                       | 770                   | 990           |

<sup>1</sup> The unit is capable of high-low fan performance through the use of a 2-stage thermostat wired to specific terminals for High-Low CFM fan performance.

<sup>2</sup> Units are shipped at Fan Speed 3.

<sup>3</sup> Fan Only speed in the above table is when SW4 is Off. When SW4 is On, the Fan Only speed will match Cool Low CFM (Stage 1) speed.

## MT2300 Controller with an Optional BACnet® Communication Module



For installation and operation information on MT2300 unit controller and other ancillary components, see:

- OM 1364 - MT2300 Unit Controller with MT2310 I/O Expansion Board MicroTech® Controller
- IM 956 - Temperature Sensors for Units with MicroTech®III or MT2300 Unit Controller and LonWorks® or BACnet® Communication Module
- IM 1363 - MicroTech MT2300 Water Source Heat Pump Unit Controller BACnet® MS/TP Communication Module
- ED 19129 - MicroTech MT2300 Water Source Heat Pump Unit Controller BACnet® Protocol Information

Daikin Applied water source heat pumps are available with an optional BACnet MS/TP communication module that is designed to communicate over a BACnet MS/TP communications network to a building automation system (BAS). It can be factory or field-installed.

The unit controller is programmed and tested with all the logic required to monitor and control the unit. An optional wall sensor may be used with the communication module to provide limited local control of the water source heat pump. The unit controller monitors water and air temperatures and passes information to the communication module. The module communicates with the BAS, to provide network control of the water source heat pump.

The module makes operational data and commands available on a communications network using BACnet objects and properties:

- The network cable is a shielded twisted-pair cable
- Network communications run up to 76.8 kbps
- DIP switches on the controller enable the MS/TP MAC address to be set in the range 0-127
- Four green status LEDs on the communication module indicate communication activity on the MS/TP communication network and with the unit controller

***MT2300 unit controller with BACnet MS/TP communication module orchestrates the following unit operations:***

- Enable heating and cooling to maintain setpoint based on a room sensor
- Enable fan and compressor operation
- Monitors all equipment protection controls
- Monitors room and discharge air temperatures
- Monitors leaving water temperature
- Relays status of all vital unit functions

***The MT2300 unit controller with an optional communication module includes:***

- Return Air Temperature sensor (RAT) (field-installed)
- Discharge Air Temperature sensor (DAT) (field-installed)
- Leaving Water Temperature sensor (LWT)

### NOTICE

Refer to IM 956 for details to install RAT & DAT sensors.

The communication module provides access to setpoints for operational control.

***Available wall sensors include:***

- Room sensor with LED status and tenant override button
- Room sensor with LED status, tenant override button, and  $\pm 5^{\circ}\text{F}$  setpoint adjustment
- Room sensor with LED status, tenant override button,  $55^{\circ}$  to  $95^{\circ}\text{F}$  ( $13^{\circ}$  to  $35^{\circ}\text{C}$ ) setpoint adjustment

# Maintenance

## Troubleshooting

**Table 29: Troubleshooting Refrigeration Circuit**

| Symptom                            | Head Pressure | Suction Pressure | Compressor Amp Draw | Super Heat  | Subcooling | Air Temp Differential | Water (Loops) Temp Differential | Safety Lock Out         |
|------------------------------------|---------------|------------------|---------------------|-------------|------------|-----------------------|---------------------------------|-------------------------|
| Charge                             | Low           | Low              | Low                 | High        | Low        | Low                   | Low                             | Low Pressure            |
| Undercharge System (Possible Leak) |               |                  |                     |             |            |                       |                                 |                         |
| Overcharge System                  | High          | High             | High                | Normal      | High       | Normal/Low            | Normal                          | High Pressure           |
| Low Air Flow Heating               | High          | High             | High                | High/Normal | Low        | High                  | Low                             | High Pressure           |
| Low Air Flow Cooling               | Low           | Low              | Low                 | Low/Normal  | High       | High                  | Low                             | Low Temp                |
| Low Water Flow Heating             | Low/Normal    | Low/Normal       | Low                 | Low         | High       | Low                   | High                            | Low Temp                |
| Low Water Flow Cooling             | High          | High             | High                | High        | Low        | Low                   | High                            | High Pressure           |
| High Air Flow Heating              | Low           | Low              | Low                 | Low         | High       | Low                   | Low                             | Low Temp                |
| High Air Flow Cooling              | Low           | High             | Normal              | High        | Low        | Low                   | Normal                          | High Pressure           |
| High Water Flow Heating            | Normal        | Low              | Normal              | High        | Normal     | Normal                | Low                             | High Pressure           |
| High Water Flow Cooling            | Low           | Low              | Low                 | Low         | High       | Normal                | Low                             | Low Temp                |
| TXV Restricted                     | High          | Low              | Normal/Low          | High        | High       | Low                   | Low                             | High Pressure/ Low Temp |

## Troubleshooting the Water Source Heat Pump Unit

### Compressor runs in short cycle

- Check wiring - loose or broken and check for faulty connection
- Check relays and contacts, also capacitor and wiring.
- Check high pressure switch, low pressure switch and low temperature switch to see if unit is cycling on the safety.
- Check to see if the reversing valve is not hung up and is operating correctly.
- Check condensate overflow sensor in cool/dehumidification mode of operation.
- Check thermostat or room sensor for proper location

### Neither fan, nor compressor runs and all LED lights are off

- Unit control, check thermostat for correct wiring or faulty thermostat.
- Wire may be loose or broken. Replace or tighten wires.
- Fuse may be blown, circuit breaker is open.
- Low voltage, check power supply voltage.

### Fan operates, compressor does not

- Check wiring - loose or broken and check for bad connection.
- High or Low pressure lockout:
  - a. Cool mode, check water flow

b. Heating mode, check air flow

c. Check reversing valve for proper valve position

- Check compressor overload - make sure it is closed.
- Check compressor to ground, or for internal short to ground.
- Compressor winding may be open. Check continuity with ohm meter.

### Compressor attempts to start but does not

- Check compressor wiring for defective wiring or loose connection.
- Check for defective compressor internal windings with ohm meter.
- Check for faulty compressor capacitor.
- Check for lock rotor amp draw.

### Insufficient cooling or heating

- Check thermostat for improper location.
- Check for proper air flow - filter could be dirty.
- Check blower assembly for dirt or faulty fan motor capacity.
- Check for low refrigerant charge.
- Check amp draw on blower assembly.
- Check for proper water flow and delta T (°F).

# Refrigerant Information

## Refrigerant Guidelines

|  <b>WARNING</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                                                                                                                                                                                                                                                                                                                                                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <br><b>A2L</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | <p>This unit contains R-32, a class A2L refrigerant that is flammable. This unit should only be installed, serviced, repaired, and disposed of by qualified personnel licensed or certified in their jurisdiction to work with R-32 refrigerant. Installation and maintenance must be done in accordance with this manual. Improper handling of this equipment can cause equipment damage or personal injury.</p> |
| <p>For installation only in locations not accessible to the general public.</p> <p>Be aware that R-32 refrigerant may not contain an odor. Place in a well ventilated area to prevent accumulation of refrigerant. When installing the unit in a small room, take measures to keep the refrigerant concentration from exceeding allowable safety limits. Excessive refrigerant leaks, in the event of an accident in a closed ambient space, can lead to oxygen deficiency.</p> <p>Do not pierce or burn this unit.</p> <p>Never use an open flame during service or repair. Never store in a room with continuously operating ignition sources (for example: open flames, an operating gas appliance, or an operating electric heater), where there is ignitable dust suspension in the air, or where volatile flammables such as thinner or gasoline are handled.</p> <p>Only use pipes, nuts, and tools intended for exclusive use with R-32 refrigerant in compliance with national codes (ASHRAE15 or IRC).</p> <p>Do not mix air or gas other than R-32 in the refrigerant system. If air enters the refrigerant system, an excessively high pressure results, which may cause equipment damage or injury.</p> <p>Do not use means to accelerate the defrosting process or to clean, other than those recommended by the manufacturer.</p> |                                                                                                                                                                                                                                                                                                                                                                                                                   |

## Lubrication

R-32 should be used only with polyolester (POE) oil. The HFC refrigerant components in R-32 will not be compatible with mineral oil or alkylbenzene lubricants. R-32 systems will be charged with the OEM recommended lubricant, ready for use with R-32.

## Competence of Personnel

Information of procedures additional to usual information for refrigerating equipment installation, repair, maintenance and decommission procedures is required when equipment with flammable refrigerants is affected.

The training of these procedures is carried out by national training organizations or manufacturers that are accredited to teach the relevant national competency standards that may be set in legislation. The achieved competence should be documented by a certificate.



## WARNING

Service on this equipment is to be performed by qualified refrigeration personnel familiar with equipment operation, maintenance, correct servicing procedures, and the safety hazards inherent in this work. Causes for repeated tripping of equipment protection controls must be investigated and corrected. Disconnect all power before doing any service inside the unit. If refrigerant leaks from the unit, there is a potential danger of suffocation since refrigerant will displace the air in the immediate area. Servicing this equipment must comply with the requirements of all applicable industry related published standards and local, state and federal, statutes, regulations and codes in regards to refrigerant reclamation and venting. Avoid exposing refrigerant to an open flame or other ignition source.

Maintaining and servicing R-32 refrigerant should only be performed as recommended by this manual and by personnel licensed or certified in their jurisdiction to handle A2L refrigerants. Dismantling the unit and treatment of the refrigerant, oil, and additional parts must be done in accordance with the relevant local, state, and national regulations.

Only use tools meant for use on R-32 refrigerant, such as a gauge manifold, charge hose, gas leak detector, reverse flow check valve, refrigerant charge base, vacuum gauge, or refrigerant recovery equipment.

The following guidelines align with UL Standard 60335-2-40.

## Maintenance and Repair

- Portable equipment shall be repaired outside or in a workshop specially equipped for servicing units with **FLAMMABLE REFRIGERANTS**.
- Ensure sufficient ventilation at the repair place.
- Be aware that malfunction of the equipment may be caused by refrigerant loss and a refrigerant leak is possible.
- Discharge capacitors in a way that won't cause any spark. The standard procedure to short circuit the capacitor terminals usually creates sparks.
- When brazing is required, the following procedures shall be carried out in the right order:
  - Remove the refrigerant. If the recovery is not required by national regulations, drain the refrigerant to the outside. Take care that the drained refrigerant will not cause any danger. In doubt, one person should guard the outlet. Take special care that drained refrigerant will not float back into the building.
  - Evacuate the refrigerant circuit.
  - Remove parts to be replaced by cutting, not by flame.
  - Purge the braze point with nitrogen during the brazing procedure.
  - Carry out a leak test before charging with refrigerant.
- Reassemble sealed enclosures accurately. If seals are worn, replace them.
- Check safety equipment before putting into service.

## Checks to the refrigerating equipment

Where electrical components are being changed, they shall be fit for the purpose and to the correct specification. At all times

the manufacturer's maintenance and service guidelines shall be followed. If in doubt, consult the manufacturer's technical department for assistance.

The following checks shall be applied to installations using FLAMMABLE REFRIGERANTS:

- the actual REFRIGERANT CHARGE is in accordance with the room size within which the refrigerant containing parts are installed;
- the ventilation machinery and outlets are operating adequately and are not obstructed;
- if an indirect refrigerating circuit is being used, the secondary circuit shall be checked for the presence of refrigerant;
- marking to the equipment continues to be visible and legible. Markings that are illegible shall be corrected; and
- refrigerating pipe or components are installed in a position where they are unlikely to be exposed to any substance which may corrode refrigerant containing components, unless the components are constructed of materials which are inherently resistant to being corroded or are suitably protected against being so corroded.

### Checks to electrical devices

Repair and maintenance to electrical components shall include initial safety checks and component inspection procedures. If a fault exists that could compromise safety, then no electrical supply shall be connected to the circuit until it is satisfactorily dealt with. If the fault cannot be corrected immediately but it is necessary to continue operation, an adequate temporary solution shall be used. This shall be reported to the owner of the equipment so all parties are advised.

Initial safety checks shall include:

- that capacitors are discharged: this shall be done in a safe manner to avoid possibility of sparking;
- that no live electrical components and wiring are exposed while charging, recovering or purging the system; and
- that there is continuity of earth bonding.

### Sealed electrical and intrinsically safe components

- All sealed electrical components shall be replaced.
- All intrinsically safe components must be replaced.

### Cabling

- Check that cabling will not be subject to wear, corrosion, excessive pressure, vibration, sharp edges or any other adverse environmental effects. The check shall also take into account the effects of aging or continual vibration from sources such as compressors or fans.

## Leak Detection

Under no circumstances shall potential sources of ignition be used in the searching for or detection of refrigerant leaks. NEVER use the following when attempting to detect flammable refrigerant leaks:

- A halide torch (or any other detector using a naked flame); or
- Substances containing chlorine.

### Detection of flammable refrigerants

The following leak detection methods are deemed acceptable for all refrigerant systems:

- Electronic leak detectors may be used to detect refrigerant leaks. For FLAMMABLE REFRIGERANTS, the sensitivity of electronic leak detectors may not be adequate, or may need re-calibration. (Detection equipment shall be calibrated in a refrigerant-free area.) Ensure that the detector is not a potential source of ignition and is suitable for the refrigerant used. Leak detection equipment shall be set at a percentage of the LFL of the refrigerant and shall be calibrated to the refrigerant employed, and the appropriate percentage of gas (25 % maximum) is confirmed.
- Leak detection fluids are also suitable for use with most refrigerants but the use of detergents containing chlorine shall be avoided as the chlorine may react with the refrigerant and corrode the copper pipe-work. Examples of leak detection fluids are:
  - bubble method; or
  - fluorescent method agents.
- If a leak is suspected, all open flames shall be removed/ extinguished.
- If a leakage of refrigerant is found which requires brazing, all of the refrigerant shall be recovered from the system, or isolated (by means of shut off valves) in a part of the system remote from the leak. Removal of refrigerant shall be according to instructions in "[Pressure Testing and Refrigerant Evacuation](#)".

## Pressure Testing and Refrigerant Evacuation

- Make sure that air or any matter other than R-32 refrigerant does not get into the refrigeration cycle.
- If refrigerant gas leaks occur, ventilate the room/area as soon as possible.
- R-32 should always be recovered and never released directly into the environment.
- Only use tools meant for use on R-32 refrigerant (such as a gauge manifold, charging hose, or vacuum pump adapter).

### Removal and evacuation

When breaking into the refrigerant circuit to make repairs, or for any other purpose, conventional procedures shall be used. However, for flammable refrigerants it is important that best practice be followed, since flammability is a consideration.

- The following procedure shall be adhered to:
  - i. safely remove refrigerant following local and national regulations - see "[Recovery](#)" section;
  - ii. purge the circuit with inert gas;
  - iii. evacuate;



- iv. purge with inert gas;
- v. open the circuit by cutting (if flammable refrigerant) or brazing.
- The refrigerant charge shall be recovered into the correct recovery cylinders according to local and national codes. For equipment containing flammable refrigerants, the system shall be purged with oxygen-free nitrogen to render the equipment safe for flammable refrigerants. This process might need to be repeated several times.
- Compressed air or oxygen shall not be used for purging refrigerant systems.
- For equipment containing flammable refrigerants, refrigerants purging shall be achieved by breaking the vacuum in the system with oxygen-free nitrogen and continuing to fill until the working pressure is achieved, then venting to atmosphere, and finally pulling down to a vacuum.
- When the final oxygen-free nitrogen charge is used, the system shall be vented down to atmospheric pressure to enable work to take place.
- Ensure that the outlet for the vacuum pump is not close to any potential ignition sources and that ventilation is available.

## Handling and Storage

### Conditions for safe storage

- Requirements to be met by storerooms and receptacles:
  - Store only in unopened original receptacles
  - Store in a cool and dry location
- Further information about storage conditions:
  - Keep container tightly sealed
  - Store in cool, dry conditions in well sealed receptacle
  - Protect from heat and direct sunlight
- Maximum storage temperature: 40°C (104°F)

### Fire and explosion protection information

Open and handle refrigerant receptacle with care. Keep ignition sources away. Do not smoke. Protect against electrostatic charges. Waste air is to be released into the atmosphere only via suitable separators.

## Commissioning

- Ensure that the floor area is sufficient for the refrigerant charge or that the ventilation duct is assembled in a correct manner.
- Connect the pipes and carry out a leak test before charging with refrigerant.
- Check safety equipment before putting into service.

### Charging procedures

In addition to conventional charging procedures and specific unit charging guidelines, the following requirements shall be followed:

- Ensure that contamination of different refrigerants does not occur when using charging equipment.

- Hoses or lines shall be as short as possible to minimize the amount of refrigerant contained in them.
- Cylinders shall be kept in an appropriate position according to the instructions.
- Ensure that the refrigeration system is electrically connected to ground to protect against electrical shock and to ensure safe discharge of static electricity during maintenance or prior to charging with refrigerant.
- Label the system when charging is complete (if not already).
- Extreme care shall be taken not to overfill the refrigerating system.
- Prior to recharging the system, it shall be pressure-tested with the appropriate purging gas. The system shall be leak-tested on completion of charging but prior to commissioning. A follow up leak test shall be carried out prior to leaving the site.

## Decommissioning

- If the safety is affected when the equipment is put out of service, the refrigerant charge shall be removed before decommissioning.
- Ensure sufficient ventilation at the equipment location.
- Be aware that malfunction of the equipment may be caused by refrigerant loss and a refrigerant leak is possible.
- Discharge capacitors in a way that won't cause any spark.
- Remove the refrigerant according to details in "Recovery" section. If recovery is not required by national regulations, drain the refrigerant to the outside. Take care that the drained refrigerant will not cause any danger. In doubt, one person should guard the outlet. Take special care that drained refrigerant will not float back into the building.
- Ensure all isolation valves on the equipment are closed off.

## Labeling

Equipment shall be labeled stating that it has been de-commissioned and emptied of refrigerant. The label shall be dated and signed. For equipment containing FLAMMABLE REFRIGERANTS, ensure that there are labels on the equipment stating the equipment contains FLAMMABLE REFRIGERANT.

## Recovery

When removing refrigerant from a system, either for servicing or decommissioning, it is recommended good practice that all refrigerants are removed safely. When transferring refrigerant into cylinders, ensure that only appropriate refrigerant recovery cylinders are employed. Ensure that the correct number of cylinders for holding the total system charge is available. All cylinders to be used are designated for the recovered refrigerant and labeled for that refrigerant (i.e., special cylinders for the recovery of refrigerant). Cylinders shall be complete with pressure-relief valve and associated shut-off valves in good working order. Empty recovery cylinders are evacuated and, if possible, cooled before recovery occurs.

The recovery equipment shall be in good working order with a set of instructions concerning the equipment that is at hand and shall be suitable for the recovery of all appropriate refrigerants

including, when applicable, FLAMMABLE REFRIGERANTS. If in doubt, the manufacturer should be consulted. In addition, a set of calibrated weighing scales shall be available and in good working order. Hoses shall be complete with leak-free disconnect couplings and in good condition. Before using the recovery machine, check that it is in satisfactory working order, has been properly maintained and that any associated electrical components are sealed to prevent ignition in the event of a refrigerant release. Consult manufacturer if in doubt.

The recovered refrigerant shall be returned to the refrigerant supplier in the correct recovery cylinder, and the relevant waste transfer note arranged. Do not mix refrigerants in recovery units and especially not in cylinders.

If compressors or compressor oils are to be removed, ensure that they have been evacuated to an acceptable level to make certain that FLAMMABLE REFRIGERANT does not remain within the lubricant. The evacuation process shall be carried out prior to returning the compressor to the suppliers. Only electric heating to the compressor body shall be employed to accelerate this process. When oil is drained from a system, it shall be carried out safely.

### Recovery procedure

Before carrying out this procedure, it is essential that the technician is completely familiar with the equipment and all its detail. It is recommended good practice that all refrigerants are recovered safely.

Prior to the task being carried out, an oil and refrigerant sample shall be taken in case analysis is required prior to re-use of recovered refrigerant.

It is essential that electrical power is available before the task is commenced.

1. Become familiar with the equipment and its operation.
2. Isolate system electrically.
3. Before attempting the procedure, ensure that
  - mechanical handling equipment is available, if required, for handling refrigerant cylinders;
  - all personal protective equipment is available and being used correctly;
  - the recovery process is supervised at all times by a competent person;
  - recovery equipment and cylinders conform to the appropriate standards.
4. Pump down refrigerant system, if possible.
5. If a vacuum is not possible, make a manifold so that refrigerant can be removed from various parts of the system.
6. Make sure that cylinder is situated on the scale before recovery takes place.
7. Start the recovery machine and operate in accordance with instructions.
8. Do not overfill cylinders (no more than 80% volume liquid charge).

9. Do not exceed the maximum working pressure of the cylinder, even temporarily.
10. When the cylinders have been filled correctly and the process completed, make sure that the cylinders and the equipment are removed from site promptly and all isolation valves on the equipment are closed off.

### Disposal

- Waste treatment method recommendation:
  - Must be specially treated adhering to official regulations
  - Incineration in an adequate incinerator is recommended
  - Uncleaned packaging disposal must be made according to official regulations
- Ensure sufficient ventilation at the working place
- The following procedure shall be adhered to:
  - i. safely remove refrigerant following local and national regulations - see "Recovery" section;
  - ii. evacuate the refrigerant circuit;
  - iii. purge the refrigerant circuit with nitrogen gas for 5 minutes;
  - iv. evacuate again; and
  - v. If compressors are to be removed, cut out the compressor and drain the oil.

## Typical Refrigeration Cycles



### Cooling Refrigeration Cycle

When the wall thermostat is calling for COOLING, the reversing valve is de-energized and directs the flow of the refrigerant (hot gas) leaving the compressor to the water-to-refrigerant heat exchanger. Here the heat is removed by the water and the hot gas condenses to become a liquid. The liquid then flows through a thermal expansion valve (TXV) and then to the air-to-refrigerant heat exchanger coil. The liquid then evaporates becoming a gas, at the same time absorbing heat and cooling the air passing over the surfaces of the coil. The refrigerant then flows as a low pressure gas through the reversing valve and back to the suction side of the compressor to complete the cycle.

### Heating Refrigeration Cycle

When the wall thermostat is calling for HEATING, the reversing valve is energized and directs the flow of the refrigerant (hot gas) leaving the compressor to the air-to-refrigerant heat exchanger coil. Here the heat is removed by the air passing over the surfaces of the coil and the hot gas condenses to become a liquid. The liquid then flows through a TXV then to the water-to-refrigerant heat exchanger. The liquid then evaporates becoming a gas, at the same time absorbing heat and cooling the water. The refrigerant then flows as a low pressure gas through the reversing valve and back to the suction side of the compressor.

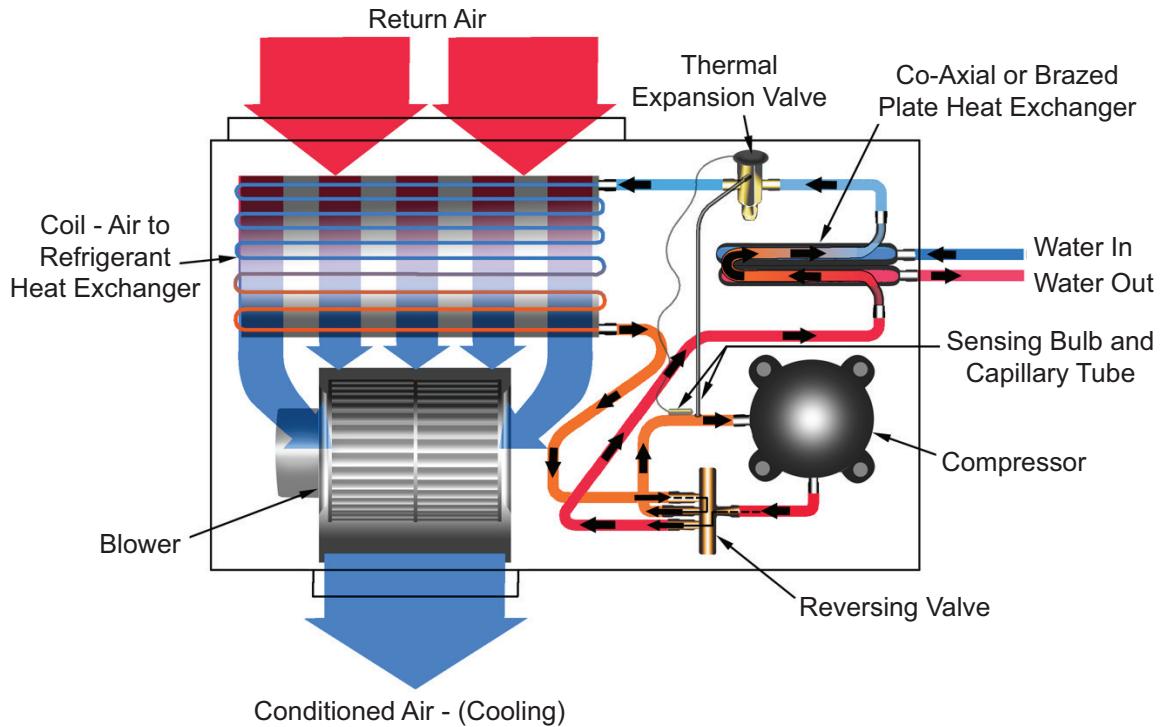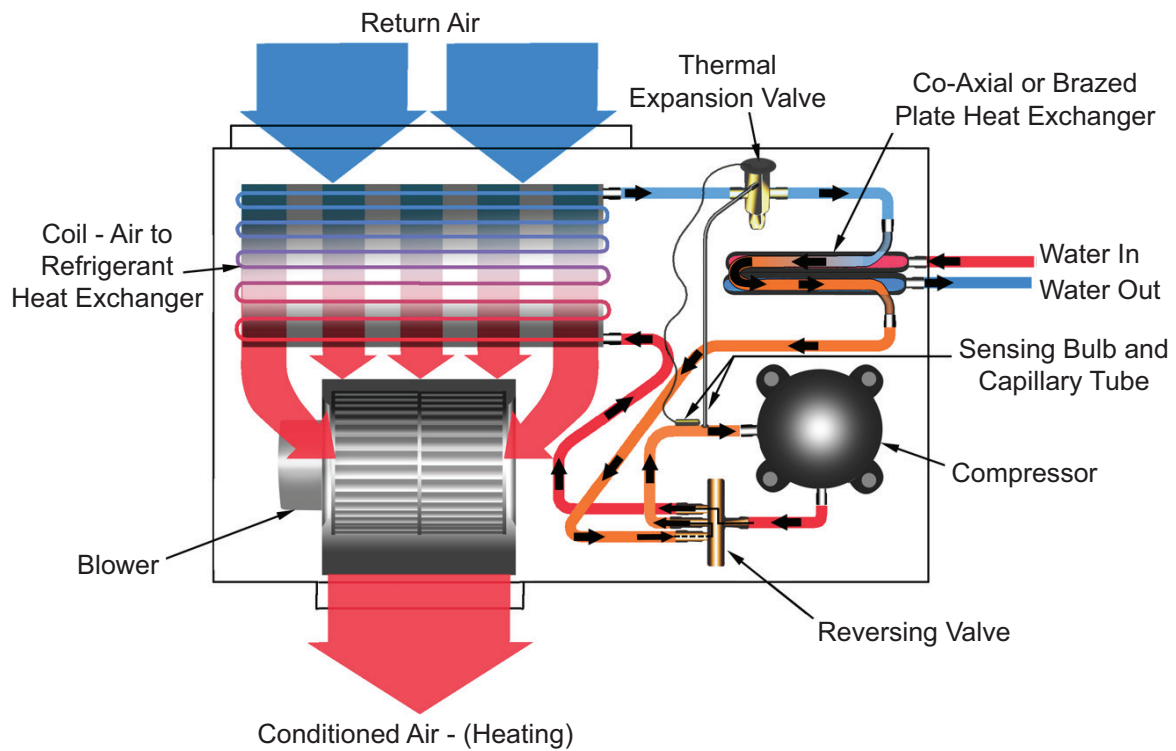

**Figure 62: Cooling Mode****Figure 63: Heating Mode**

# Appendix

## Warranty Registration Form

|                                                                                                                       |                          |
|-----------------------------------------------------------------------------------------------------------------------|--------------------------|
| <b>Warranty - Check, Test and Start</b><br><br><b>Water Source Heat Pump<br/>Equipment Check, Test and Start Form</b> | Form: 5F-4239            |
|                                                                                                                       | Group: ATS               |
|                                                                                                                       | Date: February 2025      |
|                                                                                                                       | Supersedes: WS-CTS-00.01 |

This form must be completely filled out and the record retained by the sales representative or the owner in order to comply with the terms of the Daikin Applied warranty.

### Installation Data

Job Name \_\_\_\_\_ Check, Test & Start Date \_\_\_\_\_

City or Town \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Who is Performing CTS \_\_\_\_\_

#### Equipment Type (Check all that apply)

☐ Closed Loop ☐ Open Loop

General Contractor \_\_\_\_\_ ☐ Geothermal ☐ Other (specify) \_\_\_\_\_

**Essential Items Check of System – Note: "No" answers below require notice to installer by memorandum (attached copy.)**

### Essential Items Check

A. Voltage Check \_\_\_\_\_ Volts Loop Temp. \_\_\_\_\_ °F Heating System Water P.H. Levels \_\_\_\_\_  
Set For \_\_\_\_\_ °F Cooling

| B. Yes                   | No                       | Condition                                              | Comments |
|--------------------------|--------------------------|--------------------------------------------------------|----------|
| <input type="checkbox"/> | <input type="checkbox"/> | Loop Water Flushed Clean _____                         |          |
| <input type="checkbox"/> | <input type="checkbox"/> | Closed Type Cooling Tower _____                        |          |
| <input type="checkbox"/> | <input type="checkbox"/> | Water Flow Rate to Heat Pump Balanced _____            |          |
| <input type="checkbox"/> | <input type="checkbox"/> | Standby Pump Installed _____                           |          |
| <input type="checkbox"/> | <input type="checkbox"/> | System Controls Functioning _____                      |          |
| <input type="checkbox"/> | <input type="checkbox"/> | Outdoor Portion of Water System Freeze Protected _____ |          |
| <input type="checkbox"/> | <input type="checkbox"/> | Loop System Free of Air _____                          |          |
| <input type="checkbox"/> | <input type="checkbox"/> | Filters Clean _____                                    |          |
| <input type="checkbox"/> | <input type="checkbox"/> | Condensate Traps Installed _____                       |          |

**Note: "No" answers below require notice to installer by memorandum (attached copy.)**

☐ Outdoor Air to Heat Pumps: \_\_\_\_\_  
☐ Other Conditions Found: \_\_\_\_\_

Please include any suggestions or comments for Daikin Applied: \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

#### Above System is in Proper Working Order

**Note: This form must be retained. If a warranty claim is submitted, this form will need to be sent to the warranty administrator before any service money can be released.**

\_\_\_\_\_  
Date

\_\_\_\_\_  
Signature for Sales Representative

\_\_\_\_\_  
Signature for Customer

#### For Internal Use

Release:  
SM \_\_\_\_\_  
CTS \_\_\_\_\_  
T \_\_\_\_\_

\_\_\_\_\_  
Service Manager Approval

\_\_\_\_\_  
Date

# Warranty Registration Form

## Unit Check / Equipment Data


| Installation Data                                                                                      |                                 |
|--------------------------------------------------------------------------------------------------------|---------------------------------|
| Job Name _____                                                                                         | Check Test Date: _____          |
| City _____                                                                                             | State _____ Zip _____           |
| Daikin Model # _____                                                                                   |                                 |
| Daikin Serial # _____                                                                                  | Job site Unit ID # (HP #) _____ |
| General Contractor: _____ Mechanical Contractor: _____                                                 |                                 |
| Technician Performing Start-Up: Name _____ Employer: _____                                             |                                 |
| <b>Complete equipment data from measurements taken at the locatons indicated on the drawing below.</b> |                                 |

| Equipment Data                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|
| <b>Flow Rate</b><br>① EWP - PSI In _____ minus ② LWP - PSI Out _____ equals $\Delta P$ _____<br>The first step in finding GPM is to subtract leaving water pressure from entering water pressure. The difference between the two is referred to as $\Delta P$ . $\Delta P$ can be converted to GPM by looking in the equipment specification catalog.<br><b>Caution <math>\Delta P \neq GPM</math></b><br><b>Note: A conversion table must be used to find GPM from (Delta) <math>\Delta P</math> measurements.</b> | <b><math>EWP - LWP = \Delta P</math></b>                                    |
| <b>Loop Fluid Temperature Rise / Drop through Coaxial Heat Exchanger</b><br>③ EWT - °F Out _____ minus ④ LWT - °F Out _____ equals Fluid $\Delta T$ _____<br>$\Delta T$ is the rise or drop in the fluid temperature as it passes through the Coaxial.                                                                                                                                                                                                                                                              | <b><math>EWT - LWT = \Delta T</math></b>                                    |
| <b>Air Temperature Rise / Drop through the air coil</b><br>⑤ EAT - °F In _____ minus ⑥ LAT - °F Out _____ equals Air $\Delta T$ _____                                                                                                                                                                                                                                                                                                                                                                               | <b><math>\Delta T \times CFM \times 1.08 = BTUH \text{ Sensible}</math></b> |

**Note 1: Perform Check, Test and Start-Up in the Cooling Mode Only.**

**Note 2: For units with multi-stage compressor operation, verify that the unit is in second stage before logging the requested information.**

|                                  |                               |                                |                                   |
|----------------------------------|-------------------------------|--------------------------------|-----------------------------------|
| EWT - Entering Water Temperature | EWP - Entering Water Pressure | EAT - Entering Air Temperature | $\Delta$ - Delta (Differential)   |
| LWT - Leaving Water Temperature  | LWP - Leaving Water Pressure  | LAT - Leaving Air Temperature  | CFM - Cubic Feet/Minute           |
|                                  |                               |                                | BTUH - British Thermal Units/Hour |

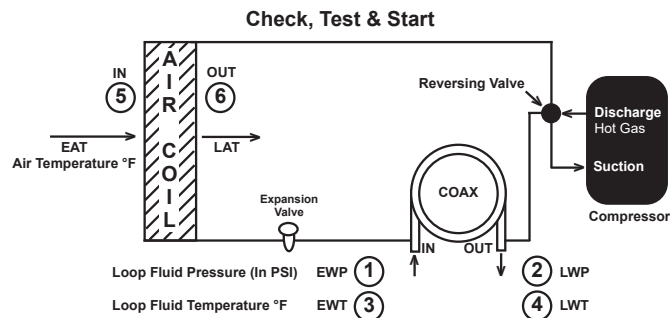

# Warranty Registration Form

## Commercial Check, Test and Start Worksheet

(Complete all equipment measurements indicated for each unit per installation on page 2)

|     | Model | Serial # | H.P. # | EWT<br>③ | LWT<br>④ | EWP<br>① | LWP<br>② | EAT<br>⑤ | LAT<br>⑥ | Volts | Amps<br>Cooling | Check<br>Air Filter<br>and Coil | Comments<br>(more comments on back) |
|-----|-------|----------|--------|----------|----------|----------|----------|----------|----------|-------|-----------------|---------------------------------|-------------------------------------|
| 1.  |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 2.  |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 3.  |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 4.  |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 5.  |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 6.  |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 7.  |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 8.  |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 9.  |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 10. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 11. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 12. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 13. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 14. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 15. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 16. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 17. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 18. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 19. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 20. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 21. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 22. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 23. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 24. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 25. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 26. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 27. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 28. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 29. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 30. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 31. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 32. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 33. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 34. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 35. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 36. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 37. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 38. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 39. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 40. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 41. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |
| 42. |       |          |        |          |          |          |          |          |          |       |                 |                                 |                                     |

# Limited Product Warranty



## DAIKIN APPLIED AMERICAS INC. LIMITED PRODUCT WARRANTY (United States and Canada)

### WARRANTY

Daikin Applied Americas Inc. dba Daikin Applied ("Company") warrants to contractor, purchaser and any owner of the product (collectively "Owner") that, subject to the exclusions set forth below Company, at its option, will repair or replace defective parts in the event any product manufactured by Company, including products sold under the brand name Daikin and used in the United States or Canada, proves defective in material or workmanship within twelve (12) months from initial startup or eighteen (18) months from the date shipped by Company, whichever occurs first. Authorized replacement parts are warranted for the remainder of the original warranty. All shipments of such parts will be made FOB factory, freight prepaid and allowed. Company reserves the right to select carrier and method of shipment. In addition, Company provides labor to repair or replace warranty parts during Company normal working hours on products with rotary screw compressors or centrifugal compressors. Warranty labor is not provided for any other products.

Company must receive the Registration and Startup Forms for products containing motor compressors and/or furnaces within ten (10) days of original product startup, or the ship date and the startup date will be deemed the same for determining the commencement of the warranty period and this warranty shall expire twelve (12) months from that date. For additional consideration, Company will provide an extended warranty(ies) on certain products or components thereof. The terms of the extended warranty(ies) are shown on a separate extended warranty statement.

No person (including any agent, sales representative, dealer or distributor) has the authority to expand the Company's obligation beyond the terms of this express warranty or to state that the performance of the product is other than that published by Company.

### EXCLUSIONS

1. If free warranty labor is available as set forth above, such free labor does not include diagnostic visits, inspections, travel time and related expenses, or unusual access time or costs required by product location.
2. Refrigerants, fluids, oils and expendable items such as filters are not covered by this warranty.
3. This warranty shall not apply to products or parts : (a) that have been opened, disassembled, repaired, or altered, in each case by anyone other than Company or its authorized service representative; (b) that have been subjected to misuse, abuse, negligence, accidents, damage, or abnormal use or service; (c) that have not been properly maintained; (d) that have been operated or installed, or have had startup performed, in each case in a manner contrary to Company's printed instructions; (e) that have been exposed, directly or indirectly, to a corrosive atmosphere or material such as, but not limited to, chlorine, fluorine, fertilizers, waste water, urine, rust, salt, sulfur, ozone, or other chemicals, contaminants, minerals, or corrosive agents; (f) that were manufactured or furnished by others and/or are not an integral part of a product manufactured by Company; or (g) for which Company has not been paid in full.
4. This warranty shall not apply to products with rotary screw compressors or centrifugal compressors if such products have not been started, or if such startup has not been performed, by a Daikin Applied or Company authorized service representative.

### SOLE REMEDY AND LIMITATION OF LIABILITY

THIS WARRANTY CONSTITUTES THE SOLE WARRANTY MADE BY COMPANY. COMPANY'S LIABILITY TO OWNER AND OWNER'S SOLE REMEDY UNDER THIS WARRANTY SHALL NOT EXCEED THE LESSER OF: (i) THE COST OF REPAIRING OR REPLACING DEFECTIVE PRODUCTS; AND (ii) THE ORIGINAL PURCHASE PRICE ACTUALLY PAID FOR THE PRODUCTS. COMPANY MAKES NO REPRESENTATION OR WARRANTY, EXPRESS OR IMPLIED, REGARDING PREVENTION OF MOLD/MOULD, FUNGUS, BACTERIA, MICROBIAL GROWTH, OR ANY OTHER CONTAMINATES. THIS WARRANTY IS GIVEN IN LIEU OF ALL OTHER WARRANTIES, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT AND UNDER NO CIRCUMSTANCE SHALL COMPANY BE LIABLE TO OWNER OR ANY THIRD PARTY FOR INCIDENTAL, INDIRECT, SPECIAL, CONTINGENT, CONSEQUENTIAL, DELAY OR LIQUIDATED DAMAGES FOR ANY REASON, ARISING FROM ANY CAUSE WHATSOEVER, WHETHER THE THEORY FOR RECOVERY IS BASED IN LAW OR IN EQUITY, OR IS UNDER A THEORY OF BREACH CONTRACT OR WARRANTY, NEGLIGENCE, STRICT LIABILITY, OR OTHERWISE. THE TERM "CONSEQUENTIAL DAMAGE" INCLUDES, WITHOUT LIMITATION, THOSE DAMAGES ARISING FROM BUSINESS INTERRUPTION OR ECONOMIC LOSS, SUCH AS LOSS OF ANTICIPATED PROFITS, REVENUE, PRODUCTION, USE, REPUTATION, DATA OR CROPS.

### ASSISTANCE

To obtain assistance or information regarding this warranty, please contact your local sales representative or a Daikin Applied office.

Form No. 933-430285Y-01-A (11/2023)  
Part No. 043028500 Rev.0F

# COMPLETE HVAC SYSTEM SOLUTIONS

SELF-CONTAINED | ROOFTOPS | COILS | CONDENSING UNITS  
AIR HANDLERS | WATER-COOLED CHILLERS | AIR-COOLED CHILLERS  
MODULAR CENTRAL PLANTS | CONNECTED BUILDING CONTROLS  
UNIT HEATERS | FAN COILS | AIR PURIFIERS | WATER SOURCE HEAT PUMPS  
VARIABLE AIR VOLUME UNITS | UNIT VENTILATORS



13600 INDUSTRIAL PARK BLVD. | MINNEAPOLIS, MN 55441  
1-800-432-1342 | 763-553-5330

LEARN MORE AT  
**DAIKINAPPLIED.COM**

PART NUMBER: IM1378

© 2026 DAIKIN APPLIED | (800) 432.1342 | WWW.DAIKINAPPLIED.COM